



**! IMPORTANT - The unit has a maximum loading limit of 30kg. All fixings supplied must be used for installation.**


## Parts

- A** x12 3.5 x 16mm screw  
**B** x4 M6 x 12mm screw






- F** Bracket x2  
x2 pre-installed  
countersunk screws

## Tools required




**1** Fit runners to cabinet sides. We recommend this operation is carried out before cabinet carcass is assembled.

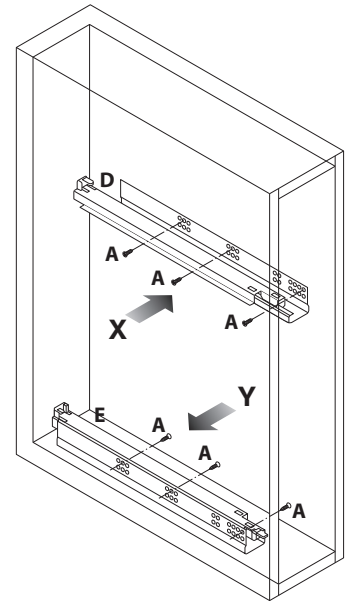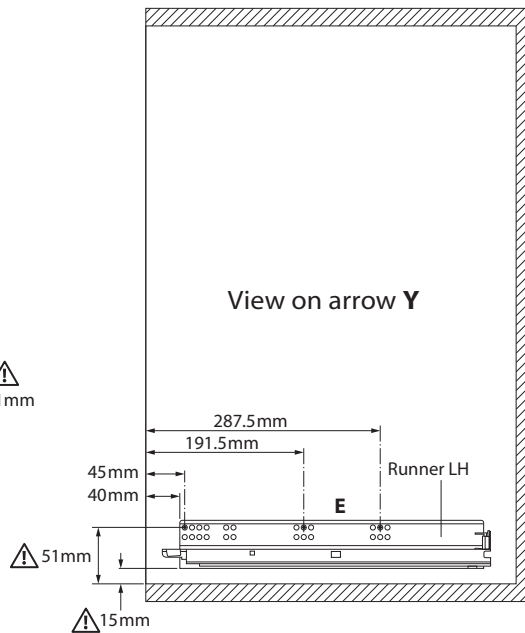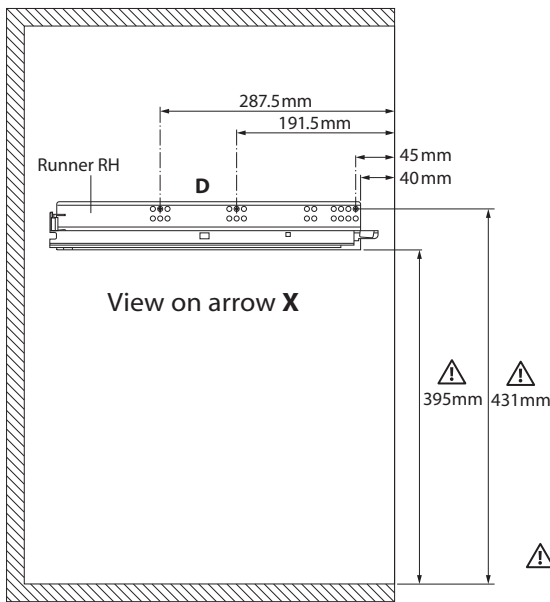


**IMPORTANT:**  
Dimensions are based upon a 18mm thick carcass.  
For other carcass thickness, adjust accordingly.

**2** Fit basket to both runners.

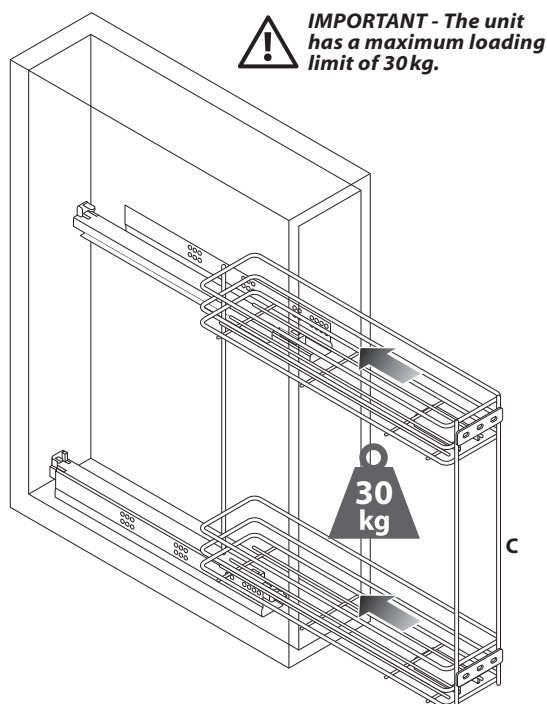

**3** Secure brackets to door.

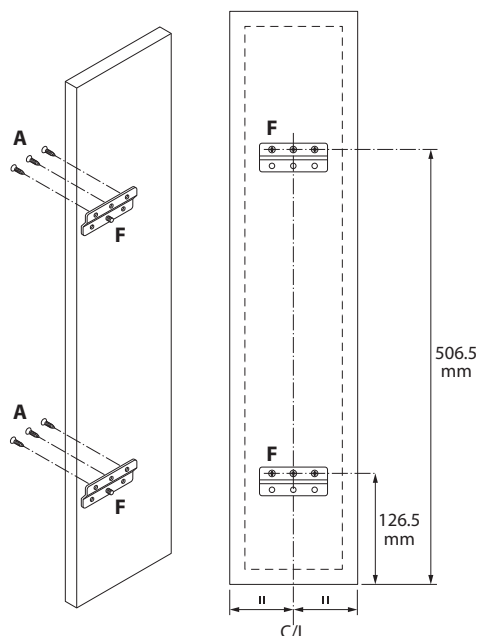

**4** Fit door to basket.

