

**\*Professional Installation Recommended\***

# Cat Security™

by Cap City Muffler



Toyota Prius Generation 3 2010 - 2015

Toyota Prius Generation v 2012 - 2017

Thank you for your purchase. With the installation of this Cat Security™ shield, we hope that you will help prevent any further catalytic converter theft. The included hardware kit will help further secure your customers' catalytic converter and deter thieves.

#### Package Contents:

- (1) - aluminum front shield
- (1) - aluminum rear shield
- (4) - 1/4 inch rivets front (larger)
- (4) - 3/16 inch rivets use for rear shield (standard length)
- (3) - 3/16 inch rivets use with spacers (longer length)
- (3) - Nylon Spacers
- (1) - Anti-Rattle Tape
- (3) - Window Stickers


**\*Professional Installation Recommended\***

## Toyota Prius Cat Security™ Install Instructions (Gen 3 or V)


**NOTE:** These instructions are designed to fit either Gen 3 OR V.

**STEP 1:** Start by removing the 4 front factory plastic clips that hold the aluminum dust cover in place. Once removed you can then remove the factory dust cover (the dust cover and plastic clips will not be reused on this install.)

**STEP 2:** Before installing the front shield we highly recommend using the anti-rattle tape provided in this kit. **Tape comes in the hardware kit for the V.**

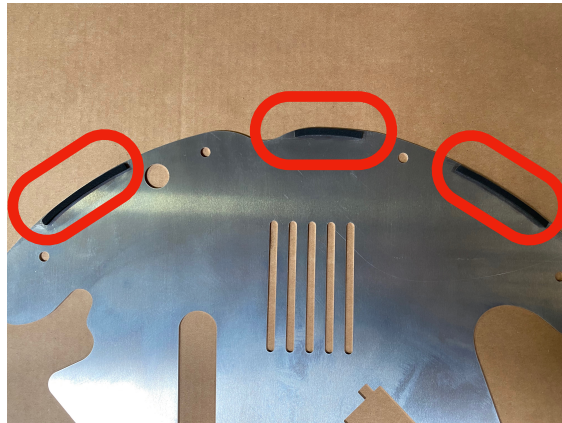


With the radius of the front shield facing towards the front of the vehicle slip the shield into place aligning the front four holes with the factory clip holes that we removed the plastic clips from in step one.

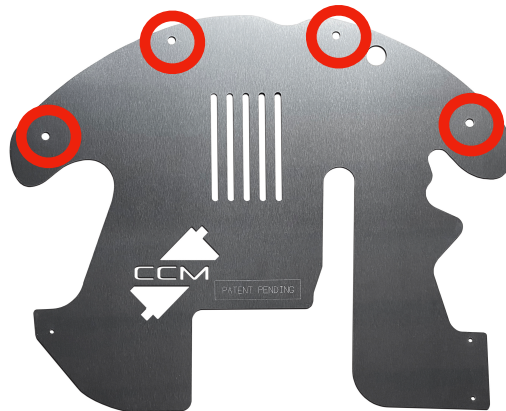

**\*Professional Installation Recommended\***

**STEP 3:** Locate the ¼” rivets (the larger of the two included in hardware kit) make sure the front four holes line up properly then using a heavy-duty ½” rivet gun insert and install the front 4 rivets into the existing holes.

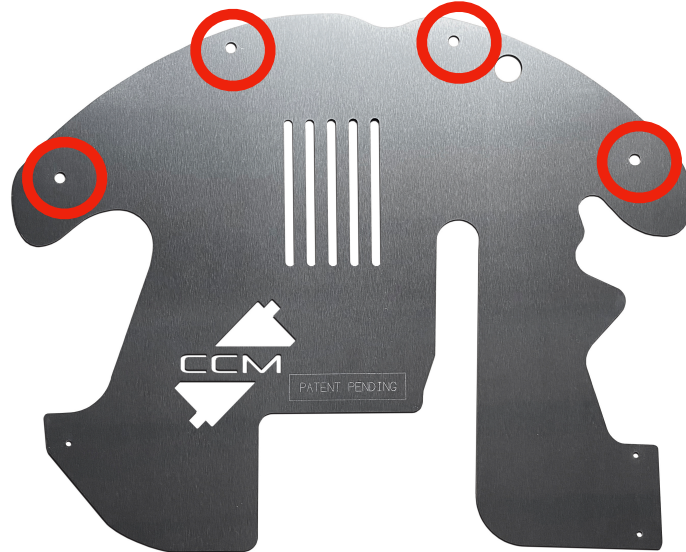


**STEP 4:** (NOTE: The Installation of the rear rivets come with spacers to allow for proper clearance. To ensure the best fit with no rattle, use the spacers when securing the rear part of the front shield.)



Once the front four rivets are installed you can then use the predrilled holes in the plate as a guide to drill your holes on the vehicle.

**\*Professional Installation Recommended\***

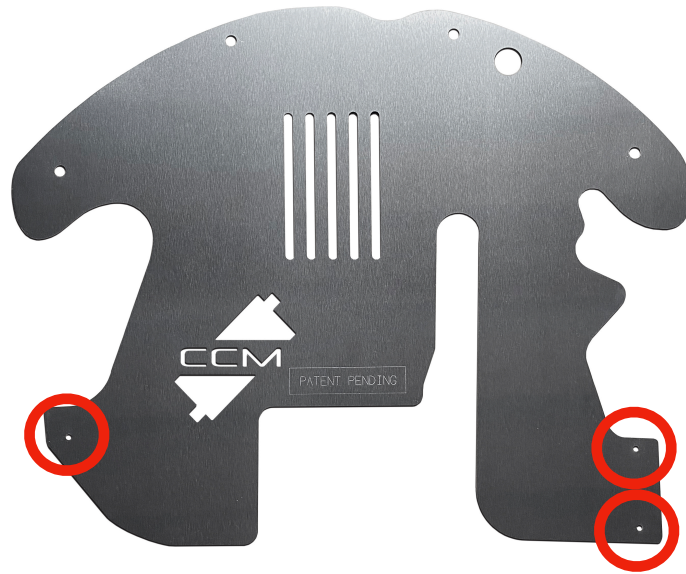

Drill the remaining 3/16" holes. Using the spacers and longer rivets, install and check for clearance around the exhaust. **NOTE: These instructions are designed to fit either Gen 3 OR V the hardware kits are different.**

## Rear Shield Installation

STEP 5: (NOTE: The Installation of the rear shield rivets are standard length.)



Drill out the 4 holes in the rear shield using the holes as guides. Install the remaining rivets and check for clearance.

**LAST STEP:** install the Cat Security™ stickers on the two rear windows and back window of your Prius to let people know your car is protected.