


DESIGN NOTES

- DESIGNED IN ACCORDANCE WITH AASHTO HS20-44 TRAFFIC BRIDGE LOADING USING 5,500 PSI COMPRESSIVE STRENGTH CONCRETE AND 60,000 PSI YIELD STRENGTH ASTM A-706 STEEL REINFORCEMENT PER CALCS #31646.
- MINIMUM EXCAVATION SIZE: 5'-8" X 4'-2" X DEPTH REQ'D.
- FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.
- COVER DESIGN FOR 300 PSF PEDESTRIAN LOADING.
- VAULT TO BE PLACED ON A MIN. 6" BASE OF CRUSHER RUN FOR EASE OF INSTALLATION AND EVEN LOAD DISTRIBUTION.
- ALL PARTS TO BE STENCILED: MFG DATE / JOB NUMBER / PRODUCT ID / WEIGHT.

BILL OF MATERIALS

ITEM	UNIT QTY	QTY	PART NUMBER	DESCRIPTION	MASS (lb)
1	1	1	100012155	Vault 3048x30 Rect. Bottom Section Knockout Sump	2462
2	1	1	100012151	Top Riser 3048x6 Cast-In Frame LADWP	277
3	1	1	100006639	DAS1-SD-3048-D2-DP-G-FONT-(SC3048-PGV)	143
4	1	6	100004349	BOLT HEX 1/2-13 UNC 2.5 304SS	
5	1	1	100006739	FONTANA NAME PLATE SS BLANK	
6	1	1	100007650	NAME PLATE HARDWARE KIT	
7	1.000 ul	1.000 ul	100005749	SEALANT JOINT BUTYL RUBBER ASTM C-990 AND M198 CS-102 1IN EQUIV X14.5FT PER BOX 118FT	

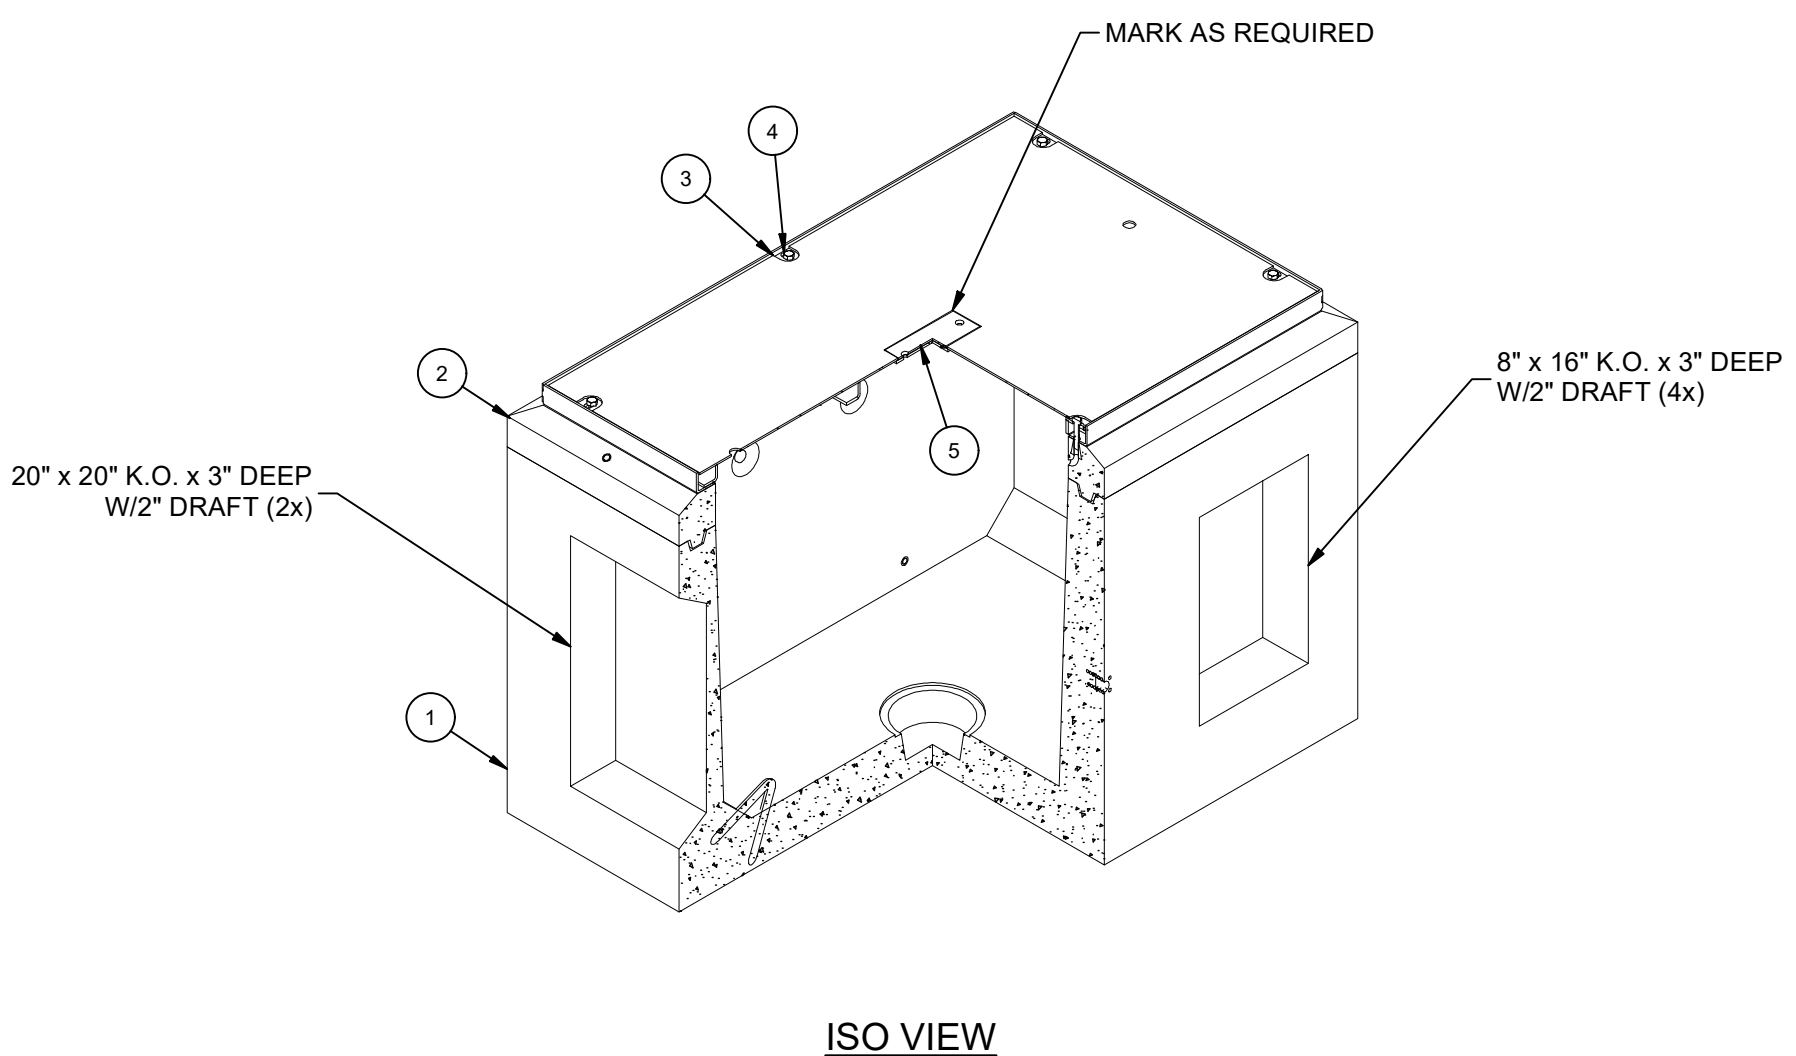

LIFTING NOTES

- FIELD INSTALLATION: PLANT DEMOLDING: MINIMUM HANDLING CONCRETE STRENGTH F'c = 5500 PSI RIGGING EQUALIZER REQUIRED TO EQUALIZE LOAD TO 4 LIFTING POINTS WITH A SLING ANGLE BETWEEN 60° AND 90°
- |                 |                       |
|-----------------|-----------------------|
| BURY DEPTH:     | 0.0' - 0.0' to Top    |
| WATER LEVEL:    | 3.0'                  |
| DESIGN SPEC:    | ACI 318, ASTM C857    |
| AGENCY:         |                       |
| APPROX. WEIGHT: | 2883.6 Lbs            |
| LOADING SPEC:   | A-16 (AASHTO HS20-44) |
| AGENCY SPEC:    |                       |

**JENSEN PRECAST** EST. 1968

WWW.JENSENPRECAST.COM

©2023 Jensen Precast- All rights reserved. All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws. Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

REVISION HISTORY






REV	DESCRIPTION	DATE	APPROVED
B-2	RELEASE IN INVENTOR	2/20/2023	

DESCRIPTION:	Vault 3048 Layout Assembly Bolt Down, Parkway, Galv.	REV:	B-2
PART NUMBER:	100010330	DRAWN BY:	S. Rodarte
CREATED:	2/1/2023	MODIFIED:	2/20/2023

LAYOUT REVIEW

SHEET: 1 OF 2

100010330.rdw

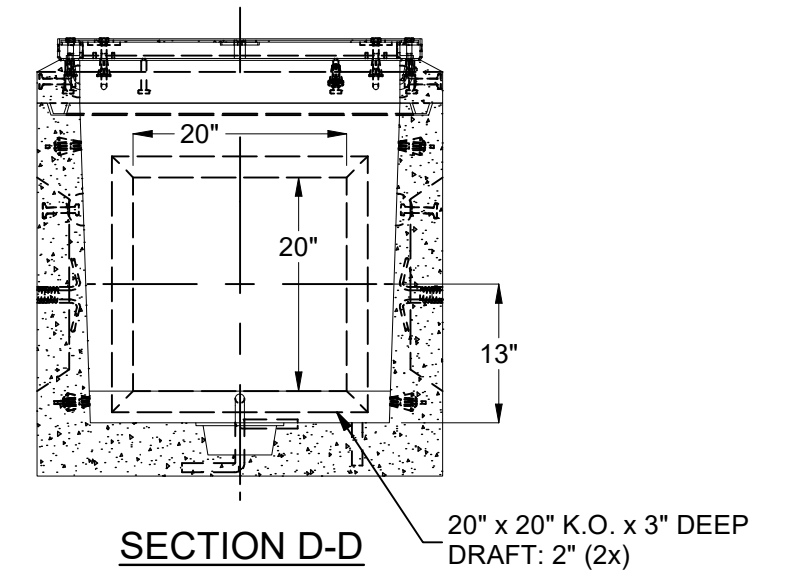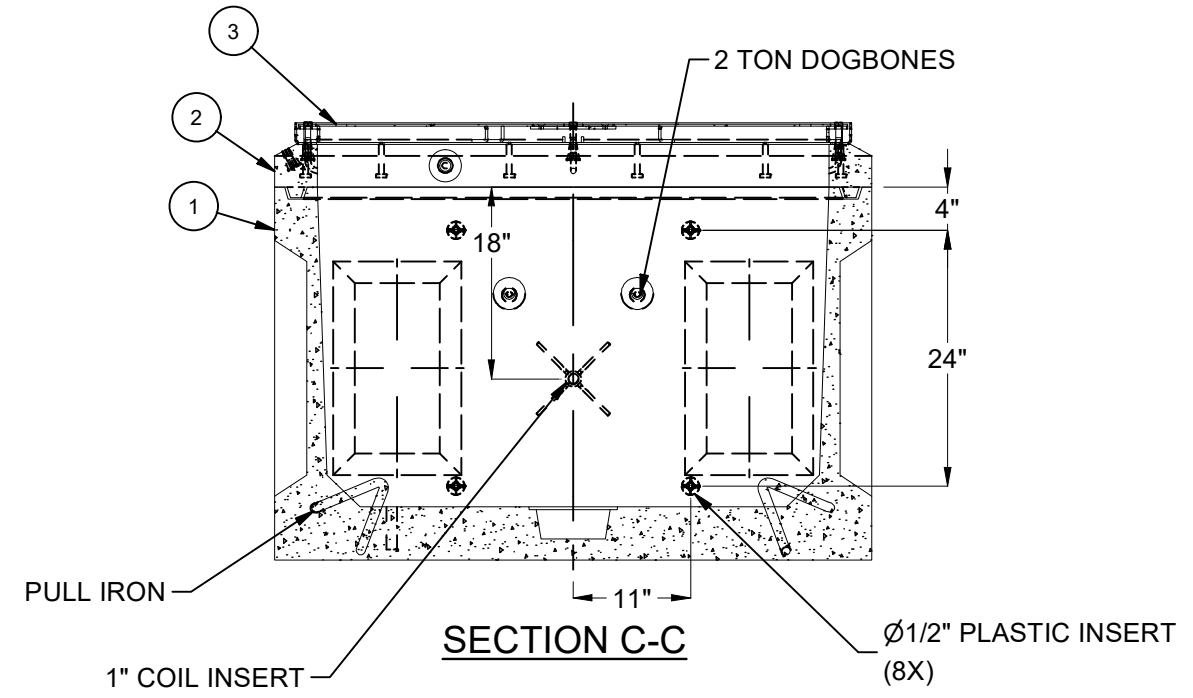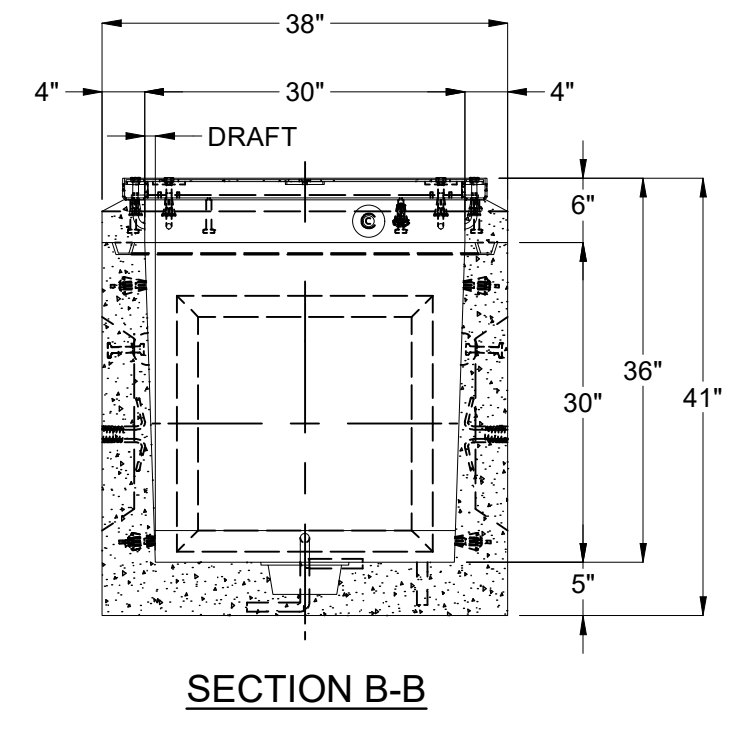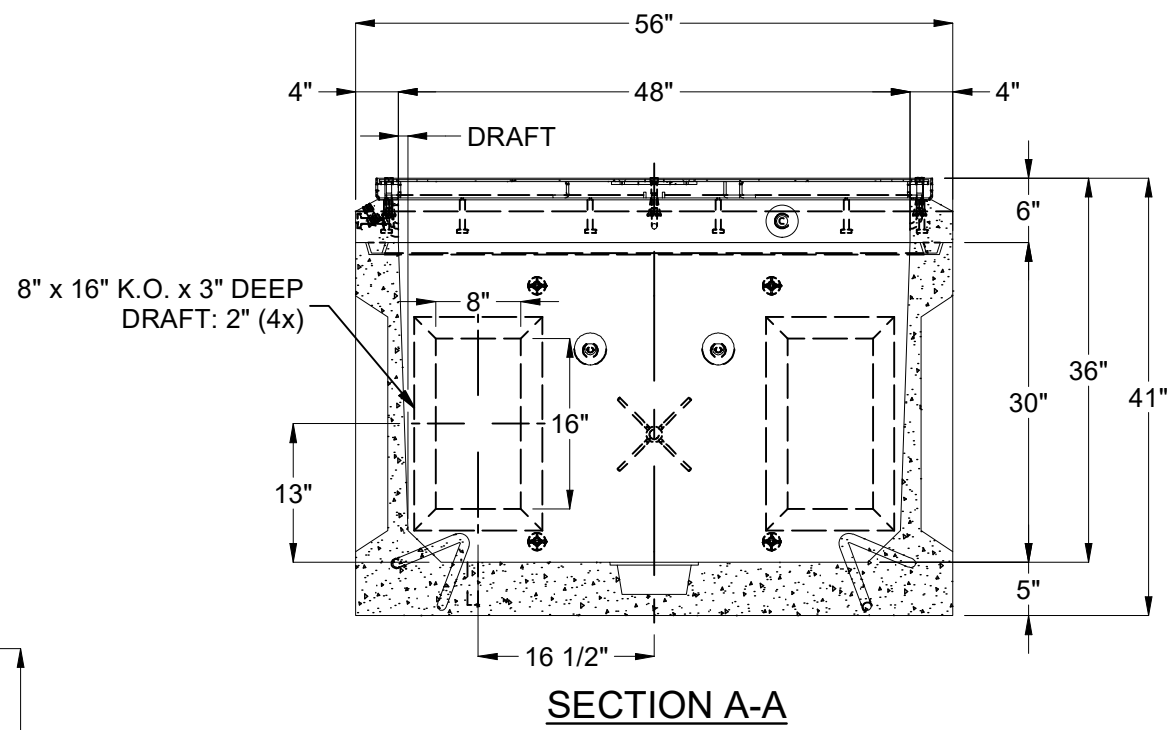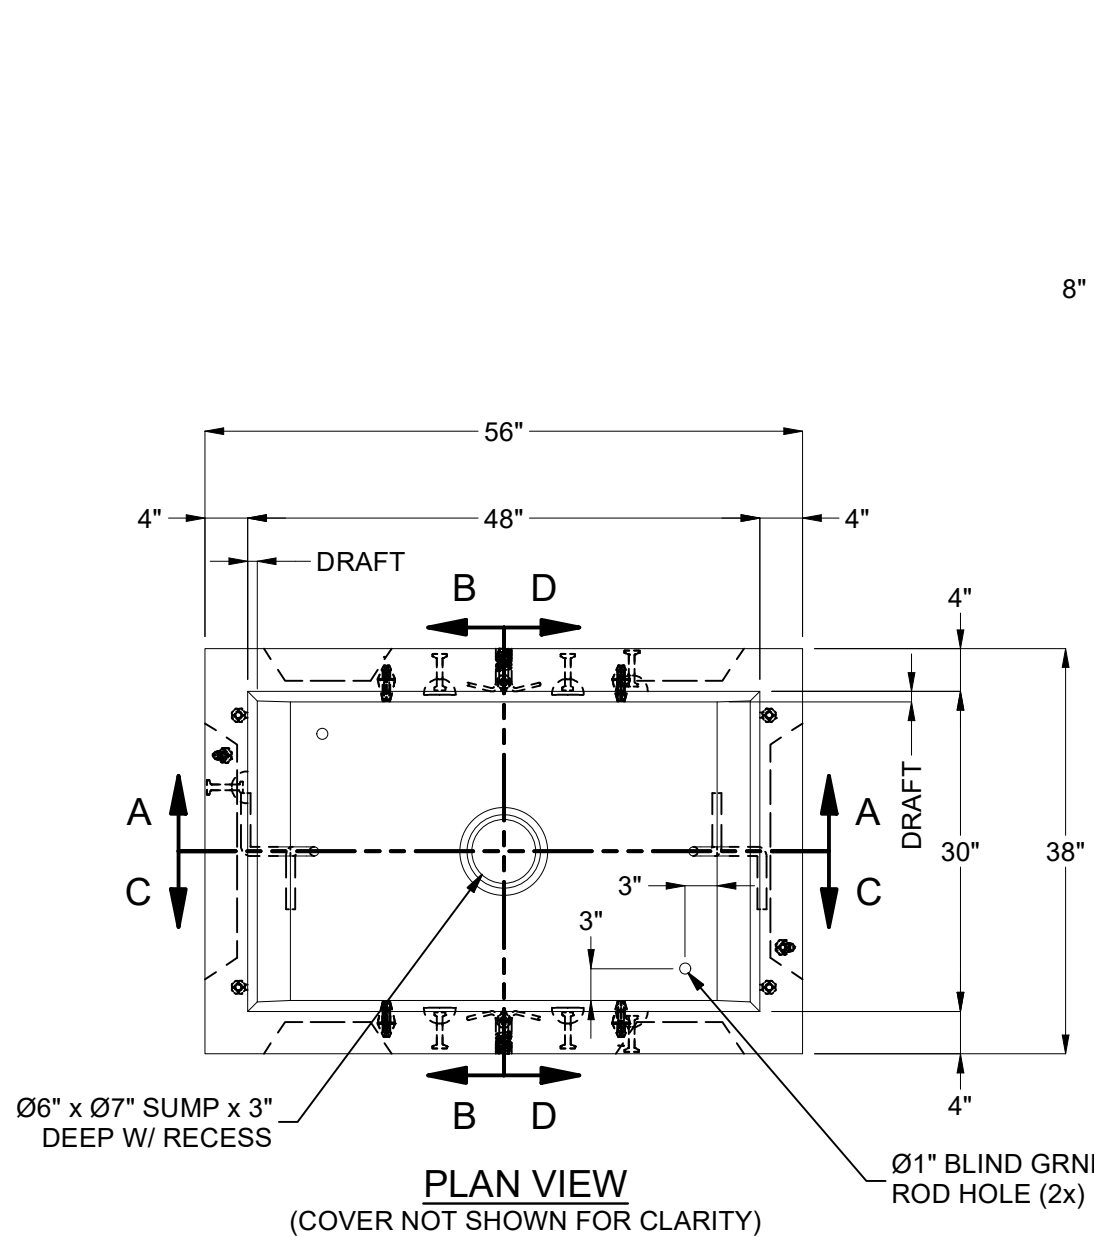

BURY DEPTH:	0.0' - 0.0' to Top
WATER LEVEL:	3.0'
DESIGN SPEC:	ACI 318, ASTM C857
AGENCY:	
APPROX. WEIGHT:	2883.6 Lbs
LOADING SPEC:	A-16 (AASHTO HS20-44)
AGENCY SPEC:	

**JENSEN PRECAST** EST. 1968

WWW.JENSENPRECAST.COM

©2023 Jensen Precast- All rights reserved. All materials appearing as Jensen Precast documents and the like are proprietary work product and are protected under U.S. copyright and other laws. Unless in conjunction with business conducted with Jensen Precast, any use of Jensen Precast work product without express, written consent is prohibited, and recipient is prohibited from distributing any and all work product to non-approved third parties under penalty of civil action.

DESCRIPTION:	Vault 3048 Layout Assembly Bolt Down, Parkway, Galv.	
	LAYOUT DRAWING	
PART NUMBER:	100010330	DRAWN BY: S. Rodarte
CREATED:	2/1/2023	MODIFIED: 2/20/2023

REV: B-2

SHEET: 2 OF 2

100010330.rdw