

Considerations prior to placing an order




SOLID *MEASURE THE WIDTH*
Cross Design 1 or 2 or Tag Design 2

SPOKED *MEASURE THE WIDTH*
Use: Cross Design 1 or Cross Design 2 or Tag Design 1 or Tag Design 2


- Width of handbrake wheel 23cm to 46cm / 9" to 18" 36cm to 56cm / 14" to 22" other
- Type of handbrake wheel SOLID WHEEL SPOKED WHEEL HANDBRAKE LEVER
- Colour High Visibility Orange High Visibility Saturn Yellow other
- Wording on label BRAKE DEFECTIVE DEFECTIVE DOOR DEFECTIVE HANDBRAKE
 DERAILER DO NOT LOAD DO NOT USE OVER 10T. MINIMUM
 RED CARD SCOTCH alternative wording
- Style of STOPPER Cross Design 1 Cross Design 2 Tag Design 1 Tag Design 2
- Locations to be used individual rail yards nationally locomotive driving cabs
- Quantity required individual rail yards nationally locomotive driving cabs

Cross Design 1

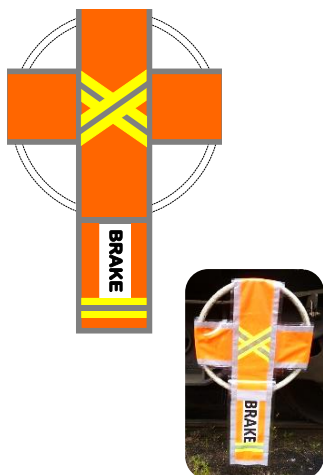


Fully adjustable, using an elasticated cord and toggle and will fit over any **spoked** or **solid handbrake wheel** with a diameter from **23cm to 46cm / 9" to 18"**

Cross Design 2

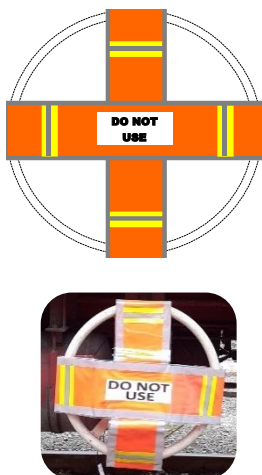


Fully adjustable, using an elasticated cord and toggle and will fit over any **spoked** or **solid handbrake wheel** with a diameter from **36cm to 56cm / 14" to 22"**

Tag Design 1

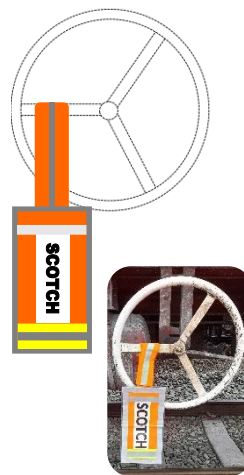

Fully adjustable, using a hook and loop fastening. Can be wrapped around handbrake wheel spokes to shorten the length of the securing strap. Attaches to **spoked handbrake wheels**, lever handbrakes, door operating levers, intermodal spigots, drawbar hooks, locomotive cab equipment. Can be attached behind **solid handbrake wheels**.

Tag Design 2

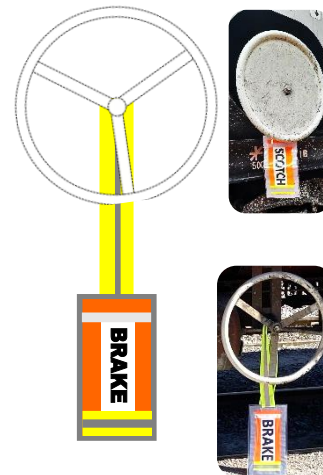

For further information please visit: <https://www.railsafetyreminders.com>

☎ 07501 248 199 email: info@railsafetyreminders.com