NEW HOBO MX2200 Series Water Temp Loggers

Water Temperature Data Straight to your Mobile Device

The new HOBO MX2200 Series water temperature loggers bring convenient wireless setup and download to Onset's field-proven TidbiT and Pendant water temp loggers! These new models feature the power of Bluetooth Low Energy (BLE) to deliver high-accuracy temperature measurements straight to your iOS or Android mobile device. No need to take a laptop or shuttle into the field!

With its rugged case design, expanded memory, and both temperature and temperature/light models, these loggers are ideal for measuring temperature in streams, lakes, oceans, and soil environments.

Supported Measurements:

Temperature, Light



Key Advantages:

- · Convenient wireless setup and download via BLE
- · Large memory stores 96,000 measurements
- · Mounting tabs to make deployment fast and easy
- Water detection feature conserves battery life
- User-replaceable battery (MX2201, MX2202, MX2203)
- Works with Onset's HOBOmobile® app

Minimum System Requirements:






Effortless, Accurate Data

Onset's HOBOmobile app, a free download from iTunes and Google Play, makes it easy to configure MX2200 Series loggers in the field and manage your data.

The loggers provide high accuracy over a wide temperature range. And, the HOBO MX2202 model features a built-in light sensor to give you repeatable light-level data in shallow-water monitoring applications.

Feature-packed

The reliable HOBO MX2200 Series loggers integrate a rich set of features in a compact, rugged package designed to streamline your deployment.

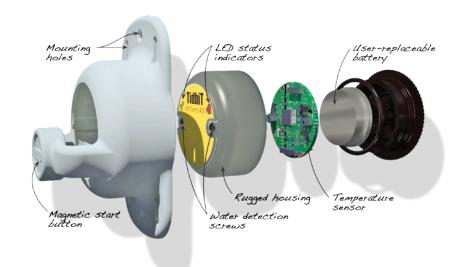

hobodataloggers.com.au



MX2201

Temperature

Depth rating 100 ft



MX2202

Temperature / Light

Depth rating 100 ft



MX2203 Temperature Depth rating 400 ft



MX2204 Temperature Depth rating 5000 ft

For complete information and accessories, please visit: www.hobodataloggers.com.au

Femperature Sensor (I	Range	-20° to 70°C (-4° to 158°F) in air -20° to 50°C (-4° to 122°F) in water
	Accuracy	±0.5°C from -20° to 70°C (-4° to 158°F)
	Resolution	0.04°C (0.072°F)
	Drift	<0.1°C (0.18°F) per year
	Response Time	17 minutes typical to 90% in air moving 1 m/s, unmounted 7 minutes typical to 90% in stirred water, unmounted
Light Sensor (MX2202)	Range	0 to 167,731 lux (15,582 lum/ft2)
	Accuracy	±10% typical for direct sunlight
Logger	Logger Operating Range	-20° to 70°C (-4° to 158°F) in air
	Waterproof	To 30.5 m (100 ft)
	Wireless Data Standard	Bluetooth Low Energy (Bluetooth Smart)
	Logging Rate	1 second to 18 hours
	Time Accuracy	±1 minute per month at 25°C (77°F)
	Battery	CR2032 3V lithium, user-replaceable
	Battery Life	1 year typical at 25°C (77°F) with logging interval of 1 minute and Bluetooth Always On, 2 years typical with Bluetooth Always Off
	Memory	96,000 measurements
	Dimensions	3.35 x 5.64 x 1.6 cm (1.32 x 2.22 x 0.63 inches)
Temperature Sensor (MX2203 and MX2204)	
Temperature Sensor (MX2203 and MX2204) Range	MX2203: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum cursticated temporature in water 30°C (8°F)
Temperature Sensor (
Temperature Sensor (Range	MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F)
Temperature Sensor (Range	MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F) ±0.2°C from 0° to 70°C (±0.36°F from 32° to 158°F) 0.01°C (0.018°F) <0.1°C (0.18°F) per year
Temperature Sensor (Range Accuracy Resolution	 MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F) ±0.2°C from 0° to 70°C (±0.36°F from 32° to 158°F) 0.01°C (0.018°F) <0.1°C (0.18°F) per year MX2203: 17 minutes typical to 90% in air moving 1 m/s, unmounted; 7 minutes typical to 90% in stirred water, unmounted
Temperature Sensor (Range Accuracy Resolution Drift	 MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F) ±0.2°C from 0° to 70°C (±0.36°F from 32° to 158°F) 0.01°C (0.018°F) <0.1°C (0.18°F) per year MX2203: 17 minutes typical to 90% in air moving 1 m/s, unmounted; 7 minutes typical to 90% in stirred water, unmounted MX2204: 15 minutes typical to 90% in air moving 1 m/s, unmounted; 4 minutes typical to 90%
	Range Accuracy Resolution Drift Response Time	 MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F) ±0.2°C from 0° to 70°C (±0.36°F from 32° to 158°F) 0.01°C (0.018°F) <0.1°C (0.18°F) per year MX2203: 17 minutes typical to 90% in air moving 1 m/s, unmounted; 7 minutes typical to 90% in stirred water, unmounted MX2204: 15 minutes typical to 90% in air moving 1 m/s, unmounted; 4 minutes typical to 90% in stirred water, unmounted
	Range Accuracy Resolution Drift Response Time Logger Operating Range	 MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F) ±0.2°C from 0° to 70°C (±0.36°F from 32° to 158°F) 0.01°C (0.018°F) <0.1°C (0.18°F) per year MX2203: 17 minutes typical to 90% in air moving 1 m/s, unmounted; 7 minutes typical to 90% in stirred water, unmounted MX2204: 15 minutes typical to 90% in air moving 1 m/s, unmounted; 4 minutes typical to 90% in stirred water, unmounted -20° to 70°C (-4° to 158°F)
	Range Accuracy Resolution Drift Response Time Logger Operating Range Waterproof	MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F) ±0.2°C from 0° to 70°C (±0.36°F from 32° to 158°F) 0.01°C (0.018°F) <0.1°C (0.18°F) per year MX2203: 17 minutes typical to 90% in air moving 1 m/s, unmounted; 7 minutes typical to 90% in stirred water, unmounted MX2204: 15 minutes typical to 90% in air moving 1 m/s, unmounted; 4 minutes typical to 90% in stirred water, unmounted -20° to 70°C (-4° to 158°F) MX2203: To 122 m (400 ft) MX2204: To 1,524 m (5,000 ft)
	Range Accuracy Resolution Drift Response Time Logger Operating Range Waterproof Transmission Range	 MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F) ±0.2°C from 0° to 70°C (±0.36°F from 32° to 158°F) 0.01°C (0.018°F) <0.1°C (0.18°F) per year MX2203: 17 minutes typical to 90% in air moving 1 m/s, unmounted; 7 minutes typical to 90% in stirred water, unmounted MX2204: 15 minutes typical to 90% in air moving 1 m/s, unmounted; 4 minutes typical to 90% in stirred water, unmounted -20° to 70°C (-4° to 158°F) MX2203: To 122 m (400 ft) MX2204: To 1,524 m (5,000 ft) Approximately 30.5 m (100 ft) line-of-sight
	RangeAccuracyResolutionDriftResponse TimeLogger Operating RangeWaterproofTransmission RangeWireless Data Standard	 MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F) ±0.2°C from 0° to 70°C (±0.36°F from 32° to 158°F) 0.01°C (0.018°F) <0.1°C (0.18°F) per year MX2203: 17 minutes typical to 90% in air moving 1 m/s, unmounted; 7 minutes typical to 90% in stirred water, unmounted MX2204: 15 minutes typical to 90% in air moving 1 m/s, unmounted; 4 minutes typical to 90% in stirred water, unmounted -20° to 70°C (-4° to 158°F) MX2203: To 122 m (400 ft) MX2204: To 1,524 m (5,000 ft) Approximately 30.5 m (100 ft) line-of-sight Bluetooth Low Energy (Bluetooth Smart)
	RangeAccuracyResolutionDriftResponse TimeLogger Operating RangeWaterproofTransmission RangeWireless Data StandardLogging Rate	 MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F) ±0.2°C from 0° to 70°C (±0.36°F from 32° to 158°F) 0.01°C (0.018°F) <0.1°C (0.18°F) per year MX2203: 17 minutes typical to 90% in air moving 1 m/s, unmounted; 7 minutes typical to 90% in stirred water, unmounted MX2204: 15 minutes typical to 90% in air moving 1 m/s, unmounted; 4 minutes typical to 90% in stirred water, unmounted -20° to 70°C (-4° to 158°F) MX2203: To 122 m (400 ft) MX2204: To 1,524 m (5,000 ft) Approximately 30.5 m (100 ft) line-of-sight Bluetooth Low Energy (Bluetooth Smart) 1 second to 18 hours
	RangeAccuracyResolutionDriftResponse TimeLogger Operating RangeWaterproofTransmission RangeWireless Data StandardLogging RateTime Accuracy	 MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F) ±0.2°C from 0° to 70°C (±0.36°F from 32° to 158°F) 0.01°C (0.018°F) <0.1°C (0.18°F) per year MX2203: 17 minutes typical to 90% in air moving 1 m/s, unmounted; 7 minutes typical to 90% in stirred water, unmounted MX2204: 15 minutes typical to 90% in air moving 1 m/s, unmounted; 4 minutes typical to 90% in stirred water, unmounted -20° to 70°C (-4° to 158°F) MX2203: To 122 m (400 ft) MX2204: To 1,524 m (5,000 ft) Approximately 30.5 m (100 ft) line-of-sight Bluetooth Low Energy (Bluetooth Smart) 1 second to 18 hours ±1 minute per month at 25°C (77°F)
	Range Accuracy Resolution Drift Response Time Logger Operating Range Waterproof Transmission Range Wireless Data Standard Logging Rate Time Accuracy Battery	 MX2204: -20° to 70°C (-4° to 158°F) in air; -20° to 50°C (-4° to 122°F) in water, maximum sustained temperature in water 30°C (86°F) ±0.25°C from -20° to 0°C (±.45°F from -4° to 32°F) ±0.2°C from 0° to 70°C (±0.36°F from 32° to 158°F) 0.01°C (0.018°F) <0.1°C (0.18°F) per year MX2203: 17 minutes typical to 90% in air moving 1 m/s, unmounted; 7 minutes typical to 90% in stirred water, unmounted MX2204: 15 minutes typical to 90% in air moving 1 m/s, unmounted; 4 minutes typical to 90% in stirred water, unmounted -20° to 70°C (-4° to 158°F) MX2203: To 122 m (400 ft) MX2204: To 1,524 m (5,000 ft) Approximately 30.5 m (100 ft) line-of-sight Bluetooth Low Energy (Bluetooth Smart) 1 second to 18 hours ±1 minute per month at 25°C (77°F) CR2477 3V lithium, user-replaceable in MX2303, non-replaceable in MX2304 3 years, typical at 25°C (77°F) with logging interval of 1 minute and Bluetooth Always



HOBO Data Loggers Australia Ph: 1300 186 107 E: sales@hobodataloggers.com.au www.hobodataloggers.com.au