


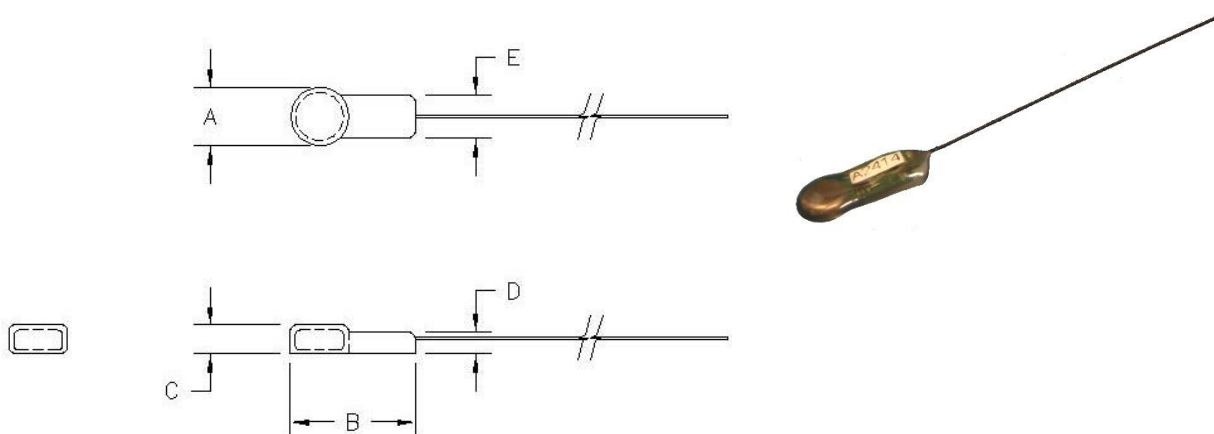

Technical Specifications

Transmitter type:	Crystal controlled 2-stage
Calibration tolerance:	$\pm 2.5\text{kHz}$
Frequency stability:	$\pm 2.5\text{kHz}$, -20°C to $+40^{\circ}\text{C}$
Pulse rate and width:	Typical on time 15ms, off time 1.5-4.0sec (controlled by astable circuit)
Pulse rate variation:	5%/volt, $\pm 20\%$ for temperatures 0°C to 40°C
Battery:	Silver Oxide
Activation:	By removing magnet
Encapsulation:	Electrical resin, water-proof, specific gravity: 1.12

MODEL SPECIFICATIONS

Model	Battery	Battery Capacity (days)				Dimensions (mm)					Weight (grams)	Price Group
		15 ppm	24 ppm	30 ppm	40 ppm	A	B	C	D	E		
A2414	337	45	30	24	18	7	14	3	4	4	0.40	C
A2415	337	45	30	24	18	7	15	3	4	5	0.50	A
A2426	317	68	45	36	28	8	16	3	4	5	0.65	A
A2435	319	90	60	48	37	8	16	4	4	5	0.75	A
A2445	377	135	89	72	55	9	17	4	4	5	0.90	A
A2455	392	216	143	116	88	10	18	5	4	5	1.20	A

Above models available only in 48.000-50.660MHz, 144.060-151.980MHz and 164.000-167.990MHz frequency ranges.

Warranty life is 50% of battery capacity.