


ATS G5 SERIES Iridium/GPS Location Collars

World's Most Reliable Transmitters and Tracking Systems



Model G5-D
~500 g, 4 yr life

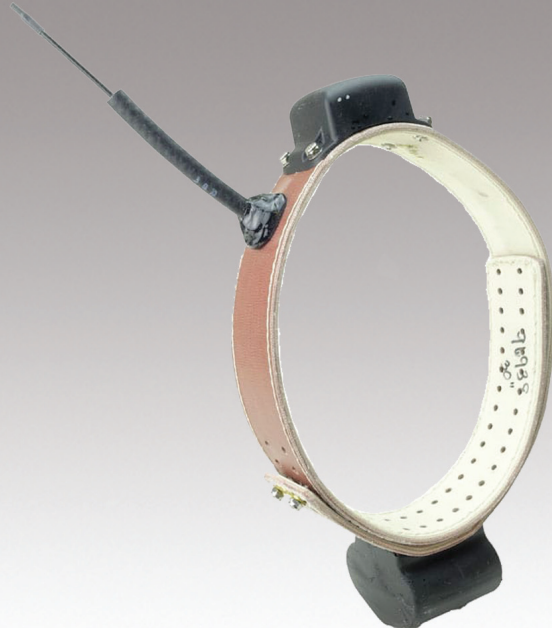

Model G5-2D
~700 g, >4 yrs life

The G5 Series of Iridium/GPS collars offer you a range of options depending on your requirements, and your first year's data is free:

The G5 series collars are easily programmed via wireless communication, using the *Wildlink* Comm Module and your PC. You control when fixes are collected and stored, when data is uplinked to the Iridium satellite (up to six per day), and when the VHF beacon will transmit. A geo-fencing feature is easily programmed, and on the model G5-2D, *Neolink* neonate monitoring is available.

Your collar's GPS location data is downlinked and stored on ATS' managed website, atsidaq.net, where it's available to you anywhere you access the internet. SMS Text message alerts can be sent on mortality, geo-fencing and *Neolink* (G5-2D only) events. Using the website you can also remotely command on-the-fly program changes to the collar's fix rate and mortality schedule, fix duration time, and Iridium transmit interval.

The collar features an integrated VHF beacon transmitter. A collar release mechanism can be added to your collars at nominal cost. G5 series collars cannot be refurbished. Your first year's data is included in the collar price. Data fees are billed yearly thereafter.

- Receive SMS text alerts on programmed events such as mortality, animal outside fence, and fawn birth (G5-2D only)
- 100% wireless operation for excellent reliability
- Remotely modify location and data transmission schedule via managed website
- Receive up to 24 locations per day, up to 6 Iridium data downloads per day
- Life calcs based on VHF on 8 hrs/day, 6 locations/day, uplinked every 2 days

TRANSMITTERS
RECEIVERS
GPS SYSTEMS


ADVANCED TELEMETRY SYSTEMS

ANTENNA SYSTEMS
CODED ID SYSTEMS
CONSULTING

World's Most Reliable Transmitters and Tracking Systems



TRANSMITTERS

RECEIVERS

GPS SYSTEMS

ANTENNA SYSTEMS

CODED ID SYSTEMS

CONSULTING


ADVANCED TELEMETRY SYSTEMS

470 FIRST AVE NW · ISANTI, MN 55040
sales@atstrack.com · www.atstrack.com
763-444-9267

ATS G5 Series Iridium/GPS Collars

Large Data Transmission Capacity - Receive animal location data via website, up to 24 location fixes per day, up to 6 downloads per day. Data files include: latest location, aggregate location since deployment (both .txt), and Google map compatible (.kml).

Programmable GPS Sampling Rates - User programs the number of fixes to collect per 24 hour period in one hour increments, and the calendar days of the year on which to collect fixes. Program may be remotely modified via website.

Standard VHF Beacon Included - VHF transmitter is user programmable on a daily on/off hourly schedule. The minimum on time is one hour per day. Turning off the VHF transmitter during periods when it will not be monitored saves power, enabling longer battery life.

Windows® Based Collar Communication Software Included - Software is used to program the collar location fix rate, VHF beacon and duty cycle. Compatible with most MS Windows® OS's. Changes to program may also be remotely commanded on-the-fly via the ATS Iridium website.

Activity Sensor Included - Records movement percentage since the last GPS coordinate was recorded.

Mortality Sensor Included - Allows the researcher to know when the animal has not moved within a 4, 6, 8, 10 or 12 hour time period. The mortality schedule may be changed via website command. Mortality notifications are sent via e-mail or text.

Ambient Air Temperature Sensor Included - Records external temperature each time a GPS location is acquired, accurate to ±2 degrees Celsius with resolution to one degree.

GPS Engine - GlobalTop Ivory Series MT3339 Engine.

G5 Series Iridium/GPS Collar Specifications

LIFE

Typical life is variable; factors affecting life include number of GPS fixes per day, number of Iridium data transmissions per day, visibility of GPS and Iridium satellites, and VHF on-time per day.

MEMORY

- On board data storage
- Datum = WGS84
- 256K nonvolatile data storage memory (64,000 GPS locations)

PHYSICAL

- **G5-2A**
 - Weight:** 250 grams, @ 26 cm mean circumference (.55 lbs.)
 - Size:** Electronics, lower 58 x 50 x 24 mm; upper 83 x 47 x 30 mm
 - Case Material:** Molded plastic, waterproof
 - Battery:** 2 each "AA" size
 - Collar Material:** Sized to your specification using 4 cm wide (1 1/2") Neoprene belting, within a 26 cm to 52 cm range of circumference
- **G5-D**
 - Weight:** ~500 grams (1.1 lbs)
 - Size:** Electronics, lower 70 x 50 x 47 mm; upper 83 x 47 x 30 mm
 - Case Material:** Molded plastic, waterproof
 - Battery:** 1 each "D" size
 - Collar Material:** Sized to your specification using 6 cm wide (2") Neoprene belting, within a 31 cm to 102 cm range of circumference
- **G5-2D**
 - Weight:** ~700 grams (1.5 lbs.)
 - Size:** Electronics, lower 73 x 69 x 55 mm; upper 83 x 47 x 30 mm
 - Case Material:** Molded plastic, waterproof
 - Battery:** 2 each "D" size
 - Collar Material:** Sized to your specification using 6 cm wide (2") Neoprene belting, within a 31 cm to 102 cm range of circumference

Ordering Information

Specify collar circumference and VHF frequency range. The *Wildlink* Comm Module, PN 17621, is required, available at nominal charge.

WARRANTY

G5 Series GPS collars are covered by a limited warranty for one year from time of shipment, or up to the calculated minimum battery life, whichever occurs first. Collars may not be refurbished.

2017 ATS, all rights reserved. Features and specifications subject to change without notice.