


MARINE MAMMAL HEADMOUNT

Series MM300

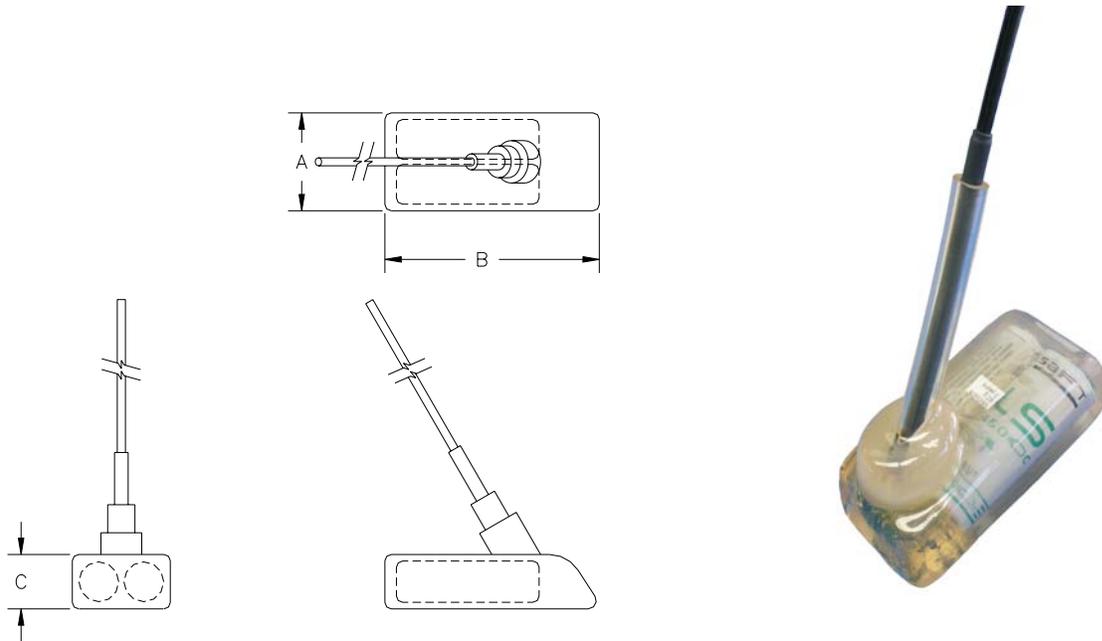

Technical Specifications

| | |
|------------------------|--|
| Transmitter type: | Crystal controlled 3-Stage |
| Calibration tolerance: | ±2.5 kHz |
| Frequency stability: | ±2.5 kHz, -20C to +40°C |
| Pulse rate and width: | Typical on time 20 ms, off time 1100 ms (controlled by uC) |
| Pulse rate variation: | 0.01 %/volt, ± 0.01% for temperatures -20°C to +40°C |
| Battery: | Lithium |
| Activation: | By removing magnet |
| Encapsulation: | Electrical resin, water-proof, specific gravity: 1.12 |

| MODEL | BATTERY | BATTERY CAPACITY (days) | | DIMENSIONS (mm) | | | WEIGHT (grams) | PRICE GROUP |
|--------|---------|----------------------------|--------|--------------------|----|----|-------------------|----------------|
| | | 40 ppm | 55 ppm | A | B | C | | |
| MM340B | AA | 1080 | 801 | 35 | 71 | 21 | 92 | D |

Warranty life is 50% of battery capacity.