


REPTILE GLUE ON

Series R1800

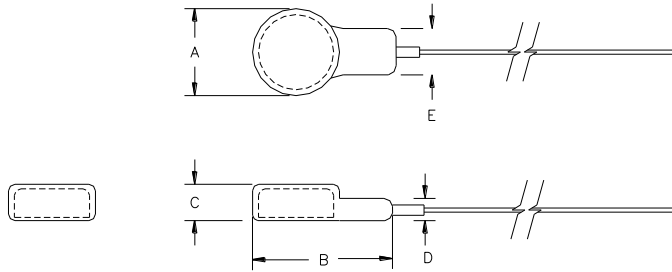

Technical Specifications

Transmitter type:	Crystal controlled 2-stage
Calibration tolerance:	±2.5kHz
Frequency stability:	±2.5kHz, -20°C to 40°C
Pulse rate and width:	Typical on time 20ms, off time 1100 ms (controlled by uC)
Pulse rate variation:	0.01%/volt, ± 0.01% for temperatures -20°C to +40°C
Battery:	Lithium
Activation:	By removing magnet
Encapsulation:	Electrical resin, water-proof, specific gravity: 1.12

MODEL	BATTERY	BATTERY CAPACITY (days)			DIMENSIONS (mm)					WEIGHT (grams)	PRICE GROUP
		35 ppm*	40 ppm	55 ppm	A	B	C	D	E		
	3.0V				A	B	C	D	E		
R1830	2032	175	129	99	23	40	6	6	14	6.7	B
R1850	2354	445	328	253	26	38	8	8	11	12.0	B
R1860	2477	796	586	452	27	40	10	8	11	15.3	B

* 15 ms pulse width

Warranty life is 50% of battery capacity.

470 First Ave. No. • Isanti, MN 55040
763.444.9267 • fax:763.444.9384 • sales@atstrack.com • www.atstrack.com