


DOORS AND WINDOWS

Better Interior




PRODUCT
CATALOGUE
2022

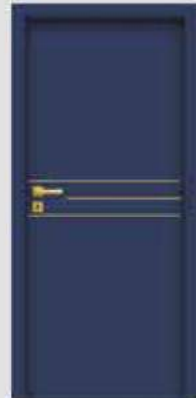


SYMBOLS AND THEIR MEANINGS


STRUCTURE

- 


LEAF STRUCTURE

wooden rail and stile
unit, honeycomb-like in-fill
- 


LEAF STRUCTURE

wooden rail and stile
unit, perforated chipboard in-fill
- 


LEAF STRUCTURE

wooden rail and stile
unit, solid chipboard in-fill
- 

LEAF STRUCTURE

glued laminated wood
- 

LEAF STRUCTURE


high quality MDF board
- 

LEAF STRUCTURE


special POL-SKONE structure

DIMENSIONS

For the standard dimensions of interior leaves, go to page 6 (some models are additionally available in non-standard dimensions). For information on dimension ranges and door frames for relevant door models, go to the pages containing their respective descriptions.

- 

SINGLE LEAF DOORS

(range of dimensions)
- 


DOUBLE LEAF DOORS

(range of dimensions)

IN-FILL

- 

"honeycomb"
- 

perforated chipboard
- 

solid chipboard

ATTRIBUTES

- 

NEW

new products in the POL-SKONE line
- 

FAST DELIVERY

door production takes 10 working days + delivery to customer
- 

BESTSELLER


most popular door models
- 

CHOICE OF DEVELOPERS


products recommended by experts

SYSTEMS


The configuration in which the door frame is connected to the leaf includes the rebated system and the non-rebated system. The former has a rabbet (groove) which overlaps the door frame; in the latter one, the leaf edge and the door frame form a uniform plane.

- 


REBATED SYSTEM

the leaf has a rabbet (groove) which overlaps the door frame
- 

NON-REBATED SYSTEM


the straight leaf edge and the door frame form a uniform plane
- 

REVES SYSTEM

the leaf has a reverse groove (notch) which is coplanar with the frame
- 

HARMONY


HARMONY SYSTEM


a system with a door frame concealed in the wall
- 


SLIDING SYSTEM


available for the sliding system


SPECIFICATIONS


- 


soundproof doors
- 


flame retardant door
- 

anti-burglar doors
- 

mechanical class I, II, III or IV
- 

thermal transmittance
- 

smoke control doors
- 

resistance to climatic conditions
- 

RTG

HARMONY SYSTEM POL-SKONE

CONCEALED door leaf



***single leaf door with hidden frame HARMONY with solid chipboard in-fill, equipped with a dropping seal, has the following parameters sound insulation power $R_w=27$ dB**

S_d – door frame external width
 S_o – installation hole width

H_d – door frame external height
 H_o – installation hole height

SPECIFICATIONS

Mechanical resistance requirements class 2, i.e. average service conditions

LEAF STRUCTURE

Non-rebated system leaf (opened outwards) or with a notch (opened inwards). The door leaf structure consists of a **rail and stile set** made of **coniferous wood**, topped with HDF boards on both sides. The leaf in-fill consists of a "honeycomb" type cellular cardboard, perforated or solid chipboard. The rated thickness of the door leaf is 40 mm.

The door leaf is designed in such a way that it can be installed flush with the door frame surface.

DOOR LEAF FINISH

HARMONY IDEA smooth surface, prime-coated for DIY painting, laminated, painted or veneered.

ACCESSORIES

Standard equipment:

concealed hinge (adjustable in 3 planes)

key-operated, cylinder or bathroom type magnetic lock

Auxiliary equipment (available at an extra charge):

perforated chipboard in-fill

solid chipboard in-fill

drop seal

additional hinge in the door leaf

ventilation trim (p. 141)

HOBES 2784 roller lock

preparation for an additional hinge (extra charge to the door leaf)

for other door dimensions – contact the Sales Department

recuperation trim

Adapting the leaf for mounting a mirror or tile 4 mm thick on one side (full plate and additional hinge required. Number of hinges „60-80“ - 3 pcs, „90-100“ - 4 pcs. It is recommended to install the handle on the split shaft). Maximum height of door - leaf adapted to mirror is 2240/2250 mm.

Double leaf door with an asymmetric division line is available on request

WIDTH


single leaf door				double leaf door				
type	S _d *	S _d **	S _o	type	S _d *	S _o *	S _d **	S _o **
"60"	696	693	710	"60"+"60"	1315	1330	1309	1325
"70"	796	793	810	"70"+"70"	1515	1530	1509	1525
"80"	896	893	910	"80"+"80"	1715	1730	1709	1725
"90"	996	993	1010	"90"+"90"	1915	1930	1909	1925
"100"	1096	1093	1110	"100"+"100"	2115	2130	2109	2125

HEIGHT


H_d	H_o
2092*	2100*
2082**	2090**

* door openable inwards ** door openable outwards

SINGLE LEAF DOOR

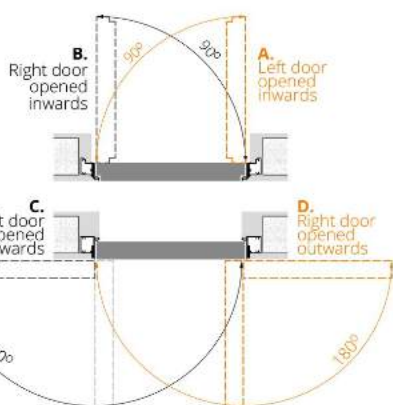

DOUBLE LEAF DOOR

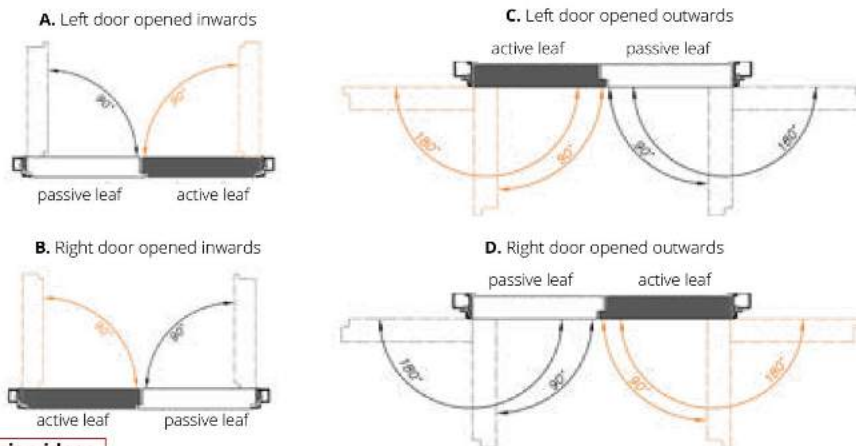

DOOR LEAF FOR THE HARMONY DOOR FRAME

leaf dimensions

HARMONY IDEA – open to your design ideas

NEW
HARMONY
IDEA

raw door leaf
prepared for
do-it-yourself
painting

LAMISTONE
SILKSTONE
UNI MAT PLUS

PAINTED
white, beige, grey
white hinges

BLACK
RAL 9005
black hinges


VENEERED

GROUP A

GROUP B

GROUP C

„60“ - „90“ x 2040/2050 mm
„100“ x 2040/2050 mm
„60“ - „90“ x 2140/2150 mm
„100“ x 2140/2150 mm
„60“ - „90“ x 2240/2250 mm
„100“ x 2240/2250 mm
„60“ - „90“ x 2340/2350 mm
„100“ x 2340/2350 mm
„60“ - „90“ x 2440/2450 mm



HARMONY INVEST door, HARMONY INVEST aluminium door frame

HARMONY INVEST



- **solid construction – wooden rail and stile** set reinforced with steel bars
- **abundant colours** with the ECO TOP, LAMINATED CPL, LAMISTONE CPL, SILKSTONE, UNI MAT PLUS, VENEERED and PAINTED surface finish
- door leaf equipped with a **drop down seal**
- **Rw = 37dB acoustic insulation**
- **aluminium reinforced door frame**
- rated **leaf thickness: 50 mm**

Entrance internal doors intended for rooms in public buildings including offices, hotels, etc.

door width "60"- "90" - 4 mechanical class according to PN-EN 1192:2001
door width "90 plus"- "110" - 3 mechanical class according to PN-EN 1192:2001
acoustic insulation: **Rw= 37 dB, D₁-35, D₂-30**



HARMONY INVEST door, HARMONY INVEST aluminium door frame



FIORD door, 00 version, SYSTEM DIN DUO adjustable door frame

FIORD



- **solid construction – wooden rail and stile set**
- **3 - layer painting system** - colour fastness for many years
- large **RAL and NCS colours palette**
- **K and C type adjustable and DUO type concealed hinges**
- door available in **10 working days** under the “fast delivery” promotion



glazing, spacer frame



DUO concealed hinge, white – option for non-rebated system



door leaf profile




FIORD door, 00 version, adjustable door frame



VERSION **00 / V03** **01 / V3S1** **03 / V3S3** **04 / V3SD**

COLOURS




Applicable to Fiord 00 leaves and DIN, DIN DUO, Vertigo frames.

OPTIONAL COLOURS



RAL and NCS colours (except the metallic ones)

DOOR FRAMES




POL-SKONE system fixed frame




DIN system adjustable frame



fixed metal frame



metal adjustable frame



DUO fixed frame




DIN DUO adjustable frame



VERTIGO adjustable frame



fixed metal frame



metal adjustable frame

EQUIPMENT

STANDARD

white matt or transparent 4 mm thick glass
version 04: white matt tempered 4 mm thick glass
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"-80" – 2 pcs, "90" – 3 pcs)
in case of door leaf with door closer and DIN system or metal frame to be used T type hinges ("60"-80" – 3 pcs, "90" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge
BLACK collection: standard magnetic lock face plate and DUO hinges are in the colour of black
ADDITIONAL (available at an extra charge)
recuperation trim
solid chipboard in-fill (third hinge recommended)

third hinge in the door leaf:

type M, type C, type K for a width of "60"-80"
concealed DUO type for a width of "60"-80"

the DUO hinge replaced with white or black colour

rebated system BLACK collection
the lock colour replaced with black colour

the DUO lock colour replaced with black or golden gloss colour

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis)

reinforcement for door closer




bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)

door lower by 50 mm or 100 mm (rebated system)

door lower by 55 mm or 100 mm (non-rebated system)

ventilation trim (p. 141)

tempered transparent 4 mm thick glass



CAMBIO door, 00 version, SYSTEM DIN adjustable door frame

CAMBIO



- **solid construction – wooden rail and stile set**
- **3 - layer painting system** - colour fastness for many years
- large **RAL and NCS colours palette**
- **K and C type adjustable and DUO type concealed hinges**



DUO concealed hinge, black – standard for the non-rebated system, collection BLACK



DUO concealed hinge, white – option for non-rebated system



leaf laminated edge in the colour of black, graphite or grey – option (not applicable to the BLACK surface)




CAMBIO door, 00 version, DIN DUO SYSTEM door frame



VERSION **00 / V00** **02 / V2S** **03SD / V3SD** **04 / V4SD** **05 / V5SD**

COLOURS




Applicable to Cambio leaves and DIN, DIN DUO and Vertigo frames.

OPTIONAL COLOURS



DOOR FRAMES

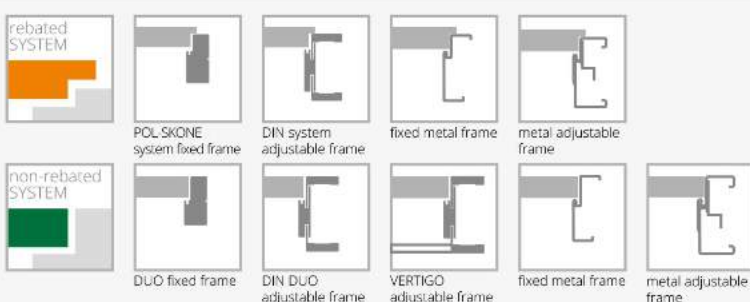

EQUIPMENT



STANDARD

white matt or transparent 4 mm thick glass
version 03SD: white matt tempered glass
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"-80" – 2 pcs, "90" – 3 pcs)
in case of door leaf with door closer and DIN system or metal frame to be used T type hinges ("60"-80" – 3 pcs, "90"-110" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge
BLACK collection: standard magnetic lock face plate and DUO hinges are in the colour of black

ADDITIONAL (available at an extra charge)

size "100" (glazing decoration as in "90")
size "110" (glazing decoration as in "90")
REVES system (version 00)
recuperation trim
perforated chipboard in-fill
solid chipboard in-fill (third hinge recommended)
third hinge in the door leaf or adjustable pivot hinge:
type M, type C, type K for a width of "60"-80"
concealed DUO type for a width of "60"-80"

the DUO hinge replaced with white or black colour
the DUO lock colour replaced with black or golden gloss colour
rebated system BLACK collection
the lock colour replaced with black colour
rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis)
rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis)
reinforcement for door closer
bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)
door lower by 50 mm or 100 mm (rebated system)
door lower by 55 mm or 100 mm (non-rebated system)
door higher by 50 mm or 100 mm (third hinge in the door leaf is required)
door higher by 150 mm or 200 mm (third hinge in the door leaf is required)
ventilation trim (p. 141)
tempered glass: versions 02, 04, 05
leaf edge in the colour of black, grey or graphite
tempered transparent 4 mm thick glass



SIMPLE door, 00 version, SYSTEM DIN adjustable door frame

SIMPLE



- **solid construction – wooden rail and stile set**
- **3 - layer painting system** - colour fastness for many years
- **large RAL and NCS colours palette**
- **K and C type adjustable and DUO type concealed hinges**



milled version view



DUO concealed hinge, white – option for non-rebated system



spacer frame profile



leaf laminated edge in the colour of black, graphite or grey – option (not applicable to the BLACK surface)




SIMPLE door, 02 version (door on the left side), 00 version (door on the right side), SYSTEM DIN adjustable door frame



VERSION **00 / VFO** **01 / VF1SD** **02 / VF2SD** **03 / VF4SD** **04 / VF45M**

COLOURS



Applicable to Simple leaves and DIN, DIN DUO and Vertigo frames.

HIGHER DOOR

00 / V00




higher by
min. 100 mm

OPTIONAL COLOURS



RAL and NCS
colours
(except
the metallic
ones)

DOOR FRAMES



POL-SKONE
system fixed frame



DIN system
adjustable frame



fixed metal frame



metal adjustable
frame



DUO fixed frame



DIN DUO
adjustable frame



VERTIGO
adjustable frame



fixed metal frame



metal adjustable
frame

EQUIPMENT

STANDARD

white matt or transparent 4 mm thick glass
for the 01 and 02 model: white matt tempered glass, thickness: 4 mm
single-point mortise lock (non-rebated system), key-operated (spacing: 90 mm),
for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type K – for the DIN system door frame, type C – for the
wooden door frame, type M – for the metal door frame or the
concealed DUO satin nickel ("60"-80" – 2 pcs, "90" – 3 pcs)
in case of door leaf with door closer and DIN system or metal frame
to be used T type hinges ("60"-80" – 3 pcs, "90"-110" – 4 pcs) -
replacement of standard hinges with hinge type T for an extra charge
BLACK collection: standard magnetic lock face plate and DUO hinges
are in the colour of black

ADDITIONAL (available at an extra charge)

size "100" (glazing decoration as in "90")
size "110" (glazing decoration as in "90")
REVES system (version 00)
recuperation trim
perforated chipboard in-fill
solid chipboard in-fill (third hinge recommended)
third hinge in the door leaf or adjustable pivot hinge:

type M, type C, type K a width of "60"-80"
concealed DUO type for a width of "60"-80"
the DUO hinge replaced with white or black colour

rebated system BLACK collection
the lock colour replaced with black colour
rail and stile set (allowing the user to shorten the door leaf
by max. 50 mm on a do-it-yourself basis)
rail and stile set (allowing the user to shorten the door leaf
by max. 90 mm on a do-it-yourself basis)

reinforcement for door closer
bottom rail and stile set protection against excessive moisture impact
(not applicable to leaves with ventilation trim)
door lower by 50 mm or 100 mm (rebated system)
door lower by 55 mm or 100 mm (non-rebated system)
door higher by 50 mm or 100 mm
(third hinge in the door leaf is required)
door higher by 150 mm or 200 mm
(third hinge in the door leaf is required)
ventilation trim (p. 141)
leaf edge in the colour of black, grey or graphite
tempered glass (version 03, 04)
tempered transparent 4 mm thick glass (version 01, 02)



SUBITO door, 07 version, SYSTEM DIN adjustable door frame

SUBITO



- **solid construction - wooden rail and stile set**
- **3-layer painting system** - colour fastness for many years
- large **RAL and NCS** colours palette
- K and C type **adjustable** and DUO type concealed **hinges**



leaf laminated edge in the colour of black, graphite or grey - option (not applicable to the BLACK surface)



SUBITO door, 07 version, SYSTEM DIN adjustable door frame

VERSION	01 / VF1	02 / VF2	03 / VF3	04 / VF14	05 / VF15	06 / VF9	07 / VF16

COLOURS

PAINTED		001 white (RAL 9003)	NEW		0M6 beige matt (NCS s2005 Y50R)		0M5 grey matt (RAL 7047)
----------------	--	-----------------------------------	------------	--	---	--	--

BLACK		002 black (RAL 9005)
--------------	--	-----------------------------------










Applicable to Subito leaves and DIN, DIN DUO and Vertigo frames.

OPTIONAL COLOURS

PAINTED		RAL and NCS colours (except the metallic ones)
----------------	--	---

DOOR FRAMES



rebated SYSTEM					
	POL-SKONE system fixed frame	DIN system adjustable frame	fixed metal frame	metal adjustable frame	
non-rebated SYSTEM					
	DUO fixed frame	DIN DUO adjustable frame	VERTIGO adjustable frame	fixed metal frame	metal adjustable frame

EQUIPMENT

STANDARD

single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)

hinges: silver type K – for the DIN system door frame, silver type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "80" – 2 pcs, "80"- "90" – 3 pcs)

in case of door leaf with door closer and DIN system or metal frame T type hinges should be used ("60"- "80" – 3 pcs, "90"- "110" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge
BLACK collection: standard magnetic lock face plate and DUO hinges are in the colour of black

ADDITIONAL (available at an extra charge)

size "100"

size "110"

REVES system

recuperation trim

perforated chipboard in-fill

solid chipboard in-fill (third hinge recommended)

third hinge in the door leaf or adjustable pivot hinge:

type M, type C, type K a width of "60"- "80"

concealed DUO type for a width of "60"- "80"

the DUO hinge replaced with white or black colour

rebated system BLACK collection:

the lock colour replaced with black colour

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis)

rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis)

reinforcement for door closer

bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)

door lower by 50 mm or 100 mm (rebated system)


door lower by 55 mm or 100 mm (non-rebated system)

door higher by 50 mm or 100 mm
(third hinge in the door leaf is required)

door higher by 150 mm or 200 mm
(third hinge in the door leaf is required)

ventilation trim (p. 141)

leaf edge in the colour of black, grey or graphite



SUBLIME door, B12 version, SYSTEM DIN adjustable door frame

SUBLIME



- **solid construction – wooden rail and stile set**
- stable solid **chipboard in-fill**
- **3 - layer painting system** - colour fastness for many years
- large **RAL and NCS** colours palette
- **T type reinforced and DUO type adjustable hinges**



milling on the door leaf surface, 30 mm wide on versions B9



milling on the door leaf surface, 15 mm wide on versions B12



milling on the door leaf surface, 4 mm wide on versions A1-A3 and B2-B6



leaf laminated edge in the colour of black, graphite or grey – option (not applicable to the BLACK surface)



SUBLIME door, B12 version, SYSTEM DIN adjustable door frame

REBATED SYSTEM



VERSION A0 / V00 A1 / VF1 A2 / VF2 A3 / VF3 B2 / VF4 B4 / VF5 B6 / VF6 B9 / VF7 B12 / VF8

DOOR HIGHER

A3 / VF3

B6 / VF6



higher by
min. 100 mm



higher by
min. 200 mm

VENTILATION OPTIONS version B12 / VF8



ventilation
slot




ventilation
tubes

COLOURS



001
white
(RAL 9003)



002
black
(RAL 9005)

Applicable to Sublime leaves and DIN,
DIN DUO and Vertigo frames.

OPTIONAL COLOURS



RAL and NCS
colours
(except
the metallic
ones)

DOOR FRAMES



POL-SKONE
system fixed frame



DIN system
adjustable frame



fixed metal frame



metal adjustable
frame



DUO fixed frame



DIN DUO
adjustable frame



VERTIGO
adjustable frame



fixed metal frame



metal adjustable
frame

EQUIPMENT

STANDARD

single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type T - for the DIN system door frame and the metal door frame, type C - for the wooden door frame ("60"-80" - 2 pcs, "90" - 3 pcs) or the concealed DUO satin nickel ("60"-70" - 2 pcs, "80"-90" - 3 pcs)
door higher than standard - a non-standard milled versions
BLACK collection: standard magnetic lock face plate and DUO hinges are in the colour of black
versions B9 - wider cut, versions B12, A1-A3, B2-B6 - narrower cut

ADDITIONAL (available at an extra charge)

size "100"
REVES system
recuperation trim
third hinge in the door leaf:
type C for a width of "60"-80"
type T for a width of "60"-80"
concealed DUO type for a width of "60"-70"
the DUO hinge replaced with white or black colour

the DUO lock colour replaced with black or golden gloss colour

rebated system BLACK collection
the T hinge colour replaced with black colour
the lock colour replaced with black colour

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis)

rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis)

reinforcement for door closer

ventilation trim (p. 141)

bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)



door lower by 50 mm or 100 mm (rebated system)

door lower by 55 mm or 100 mm (non-rebated system)

door higher by 50 mm or 100 mm
(third hinge in the door leaf is required)

door higher by 150 mm or 200 mm
(third hinge in the door leaf is required)

leaf edge in the colour of black, grey or graphite



TIARA door, W02 version, RAL 5011, SYSTEM DIN adjustable door frame

TIARA

Get inspired by
INDIGO BLUE


- **solid construction – wooden rail and stile set**
- stable solid **chipboard in-fill**
- **3 - layer painting system** - colour fastness for many years
- large **RAL and NCS** colours palette
- **K and C type adjustable and DUO type concealed hinges**



aluminium decors on the leaf surface in the colour of matt chrome (standard)



DUO concealed hinge, white – option for non-rebated system

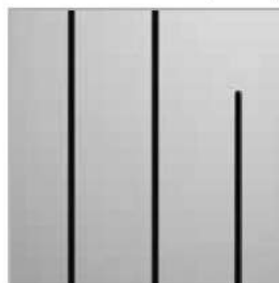

aluminium decors on the leaf surface in the colour of black, golden gloss, chrome gloss (option) – p. 145



DUO concealed hinge, black – standard for the non-rebated system, collection BLACK



TIARA door, W02 version, DIN DUO adjustable door frame



VERSION W01 / VD1 W02 / VD2 W07 / VD7



VERSION W03 / VD3 W04 / VD4 W06 / VD6 W08 / VD8



leaf laminated edge in the colour of black, graphite or grey – option (not applicable to the BLACK surface)

COLOURS



001
white
(RAL 9003)

NEW

0M6
beige matt
(NCS s2005 Y50R)

0M5
grey matt
(RAL 7047)



BLACK



002
black
(RAL 9005)

Applicable to Tiara leaves and DIN, DIN DUO and Vertigo frames.

OPTIONAL COLOURS



RAL and NCS colours (except the metallic ones)

DOOR FRAMES



POL SKONE
system fixed frame



DIN system
adjustable frame




fixed metal frame



metal adjustable
frame



DUO fixed frame




DIN DUO
adjustable frame



VERTIGO
adjustable frame



fixed metal frame



metal adjustable
frame

EQUIPMENT

STANDARD

single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)

hinges: silver type K – for the DIN system door frame, silver type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "70" – 2 pcs, "80"- "90" – 3 pcs)

BLACK collection: standard magnetic lock face plate and DUO hinges are in the colour of black

version W08: no possibility to use a ventilation slot or a ventilation grill

ADDITIONAL (available at an extra charge)

size "100"

REVES system

recuperation trim

third hinge in the door leaf:

type K, type C, type M for a width of "60"- "80"

concealed DUO type for a width of "60"- "70"

the DUO hinge replaced with white or black colour

rebated system BLACK collection

the lock colour replaced with black colour

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis) (not applicable to W08 version)

rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis) (not applicable to W08 version)

bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)

door lower by 50 mm or 100 mm (rebated system)

door lower by 55 mm or 100 mm (non-rebated system)

door higher by 50 mm or 100 mm (third hinge in the door leaf is required)




door higher by 150 mm or 200 mm (third hinge in the door leaf is required)

ventilation trim (p. 141)

aluminium decorative strips in black, golden gloss or chrome gloss

change of the DUO lock colour to black or golden gloss

leaf edge in the colour of black, grey or graphite



ESTATO door, A02 version, SYSTEM DIN adjustable door frame

ESTATO



- **solid construction – wooden rail and stile set**
- **stable solid chipboard in-fill**
- **3 - layer painting system** - colour fastness for many years
- **large RAL and NCS colours palette**
- **security glass pane**, white matt thickness: **6 mm** or **44.2 laminated glass in the colour of black or white**
- **T type reinforced and DUO type adjustable hinges**



milled version on the door leaf surface



laminated glass in the colour of white matt



leaf laminated edge in the colour of black, graphite or grey – option (not applicable to the BLACK surface)



pane in the colour of black - optional



ESTATO door, A01 version, SYSTEM DIN adjustable door frame



WHITE MATT TEMPERED GLASS

VERSION	A01 / V1SA	A02 / V2SA	A03 / V3SA	B1 / VF11	B2 / VF12	B3 / VF13
---------	------------	------------	------------	-----------	-----------	-----------




BLACK LAMINATED GLASS

WHITE MATT LAMINATED GLASS

VERSION	A01 / V1SA	A02 / V2SA	A03 / V3SA	A01 / V1SA	A02 / V2SA	A03 / V3SA
---------	------------	------------	------------	------------	------------	------------

COLOURS




OPTIONAL COLOURS



RAL and NCS colours (except the metallic ones)

DOOR FRAMES



POL SKONE system fixed frame



DIN system adjustable frame




fixed metal frame



metal adjustable frame




DUO fixed frame



DIN DUO adjustable frame



VERTIGO adjustable frame



fixed metal frame



metal adjustable frame

EQUIPMENT

STANDARD

white matt tempered glass, thickness: 6 mm (versions A01-58 mm, A02-208 mm, A03-280 mm)*
laminated glass 44.2 in the colour of black or white matt, 8.5 mm thick (versions A01-54 mm, A02-205 mm, A03-276 mm)
single-point mortise lock, 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type T - for the DIN system door frame and the metal door frame, type C - for the wooden door frame ("60"- "80" - 2 pcs, "90" - 3 pcs) or the concealed DUO satin nickel for the non-rebated system ("60"- "70" - 2 pcs, "80"- "90" - 3 pcs)

no possibility to use REVES system

ADDITIONAL (available at an extra charge)

size "100"

REVES system

third hinge in the door leaf:

type C for a width of "60"- "80"

type T for a width of "60"- "80"

concealed DUO type for a width of "60"- "70"

the DUO hinge replaced with white or black colour

rebated system BLACK collection

the T hinge colour replaced with black colour

the lock colour replaced with black colour

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis) (not applicable to versions A01, A02, A03)

rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis) (not applicable to versions A01, A02, A03)

*+/- 1-2 mm tolerance

reinforcement for door closer

(not applicable to versions A01, A02, A03)

bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)

(not applicable to versions A01, A02, A03)

door lower by 50 mm or 100 mm (rebated system) (not applicable to the version A01, A02, A03)

door lower by 55 mm or 100 mm (non-rebated system) (not applicable to versions A01, A02, A03)

door higher by 50 mm or 100 mm (third hinge in the door leaf is required) (not applicable to versions A01, A02, A03)

door higher by 150 mm or 200 mm (third hinge in the door leaf is required) (not applicable to versions A01, A02, A03)

version A01, A02, A03 door lower by 50 mm (rebated system)

version A01, A02, A03 door lower by 55 mm (non-rebated system)

version A01, A02, A03 door higher by 100 mm (third hinge in the door leaf is required)

version A01, A02, A03 door higher by 200 mm (third hinge in the door leaf is required)

ventilation trim (applicable to versions B1, B2, B3) (p. 141)

ventilation trim A01 with the "60" - "100" widths (p. 141)



ventilation trim A02, A03 with the "70" - "100" widths (p. 141)

tempered 6 mm glass in the colour of graphite, brown

sliding system (not applicable to the version A01)

leaf edge in the colour of black, grey or graphite

p. 104-109



VERTIGO door, W03 version, SYSTEM DIN adjustable door frame

VERTIGO



NEW
COLOURS

- **solid construction - wooden rail and stile set**
- **3 - layer painting system** - colour fastness for many years
- large **RAL and NCS** colours palette
- **security glass pane**, white matt thickness: 6 mm
- K and C type adjustable and DUO type concealed hinges



frame



DUO concealed hinge, white - option for non-rebated system



standard connection of architraves at an angle of 45° for the DIN DUO door frame



VERTIGO door, W02 version, VERTIGO adjustable door frame



VERSION W00 / V01 OSD / V1SD W02 / V02 W02S1 / V2SD



VERSION W03 / V03 W03S1 / V3S1 W03S2 / V3S2 W03S3 / V3S3

COLOURS



001
white
(RAL 9003)

NEW

0M6
beige matt
(NCS s2005 Y50R)

0M5
grey matt
(RAL 7047)



002
black
(RAL 9005)

Applicable to Vertigo W00, W02, W03 leaves and DIN, DIN DUO and Vertigo frames.

OPTIONAL COLOURS



RAL and NCS colours (except the metallic ones)

DOOR FRAMES



POL-SKONE system fixed frame



DIN system adjustable frame



fixed metal frame



metal adjustable frame



DUO fixed frame



DIN DUO adjustable frame



VERTIGO adjustable frame



fixed metal frame



metal adjustable frame

EQUIPMENT

STANDARD

white matt tempered glass, thickness: 6 mm
transparent pane cannot be used

single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)

hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"-80" – 2 pcs, "90" – 3 pcs)

door closer is not available

BLACK collection: standard magnetic lock face plate and DUO hinges are in the colour of black

ADDITIONAL (available at an extra charge)

size "100"

recuperation trim

REVES system (version W00, W02, W03) - the door opening angle is 87° above ZW5 range

third hinge in the door leaf:

type K, type C, type M for a width of "60"-80"
concealed DUO type for a width of "60"-80"

the DUO hinge replaced with white or black colour

rebated system BLACK collection

the lock colour replaced with black colour

bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)


door lower by 50 mm (rebated system)

door lower by 55 mm (non-rebated system)

door higher by 50 mm or 100 mm

(third hinge in the door leaf is required)

ventilation trim (p. 141)




VILANO door, W00 version, SYSTEM DIN adjustable door frame

VILANO



**NEW
COLOURS**

- **solid construction – wooden rail and stile set**
- **3 - layer painting system** - colour fastness for many years
- large **RAL and NCS** colours palette
- **security glass pane**, white matt thickness: 6 mm
- K and C type adjustable and DUO type concealed hinges



DUO concealed hinge, white – option for non-rebated system



frame profile



VILANO door, W00 version, SYSTEM DIN adjustable door frame



VERSION W00 / V01

OSD / V1SD

COLOURS



001
white
(RAL 9003)

NEW

0M6
beige **matt**
(NCS s2005 Y50R)

0M5
grey **matt**
(RAL 7047)



BLACK



002
black
(RAL 9005)

Applicable to Vilano W00 leaves and DIN, DIN DUO and Vertigo frames.

OPTIONAL COLOURS




RAL and NCS
colours
(except
the metallic
ones)

DOOR FRAMES



POL-SKONE
system fixed frame




DIN system
adjustable frame




fixed metal frame



metal adjustable
frame



DUO fixed frame



DIN DUO
adjustable frame



VERTIGO
adjustable frame



fixed metal frame



metal adjustable
frame



EQUIPMENT

STANDARD

white matt tempered glass, thickness: 6 mm
transparent pane cannot be used
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "80" – 2 pcs, "90" – 3 pcs)
door closer is not available

ADDITIONAL (available at an extra charge)

size "100"
recuperation trim
REVES system (version W00) (the door opening angle is 88° above ZW4 range)
third hinge in the door leaf:
type K, type C, type M for a width of "60"- "80"
concealed DUO type for a width of "60"- "80"
the DUO hinge replaced with white or black colour
rebated system BLACK collection
the lock colour replaced with black colour
bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)
door lower by 50 mm (rebated system)
door lower by 55 mm (non-rebated system)
door higher by 50 mm or 100 mm
(third hinge in the door leaf is required)
ventilation trim (p. 141)



for door leaves
with ventilation
option



MODERN door, 02 version, SYSTEM DIN adjustable door frame

MODERN



- **solid construction – wooden rail and stile set**
- **3 - layer painting system** - colour fastness for many years
- large **RAL and NCS** colours palette
- K and C type adjustable and DUO type concealed hinges



rail and stile set profile



DUO concealed hinge, white – option for non-rebated system



painted architrave and crown



MODERN door, 02 version with a crown, SYSTEM DIN adjustable door frame



VERSION **01 / V01** **01S6 / V1S6** **02 / V02** **02S6 / V2S6**




VERSION **05 / V05** **05S8 / V5S8** **08 / V08** **08S10 / V8S10**

COLOURS



001
white
(RAL 9003)

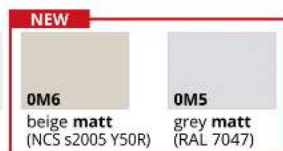

002
black
(RAL 9005)

Applicable to Modern 01, 02, 05, 08 leaves and DIN, DIN DUO and Vertigo frames.

OPTIONAL COLOURS



RAL and NCS colours (except the metallic ones)

DOOR FRAMES






EQUIPMENT

STANDARD

white matt or transparent 4 mm thick glass
wooden muntins
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "80" – 2 pcs, "90" – 3 pcs)
door closer is not available
BLACK collection: standard magnetic lock face plate and DUO hinges are in the colour of black

ADDITIONAL (available at an extra charge)

size "100"
recuperation trim
REVES system (version 01, 02, 05, 08)
third hinge in the door leaf:
type K, type M for a width of "60"- "80"
concealed DUO type for a width of "60"- "80"
the DUO hinge replaced with white or black colour
rebated system BLACK collection
the lock colour replaced with black colour
bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)
door lower by 50 mm (rebated system)
door lower by 55 mm (non-rebated system)
door higher by 50 mm or 100 mm
(third hinge in the door leaf is required)
ventilation trim (p. 141)



for door leaves with ventilation option



MODENA door, 02 version, SYSTEM DIN adjustable door frame

MODENA

NEW
COLOURS

- **solid construction - wooden rail and stile set**
- **3 - layer painting system** - colour fastness for many years
- large RAL and NCS colours palette
- K and C type adjustable and DUO type concealed hinges



rail and stile set profile



MODENA door, 08 version, SYSTEM DIN adjustable door frame



VERSION	02 / V02	05 / V05	08 / V08
----------------	-----------------	-----------------	-----------------

COLOURS



001
white
(RAL 9003)

NEW

0M6
beige **matt**
(NCS s2005 Y50R)

0M5
grey **matt**
(RAL 7047)



002
black
(RAL 9005)

Applicable DIN, DIN DUO
and Vertigo frames.

OPTIONAL COLOURS



RAL and NCS
colours
(except
the metallic
ones)


DOOR FRAMES




POL-SKONE
system fixed frame



DIN system
adjustable frame



DUO fixed frame



DIN DUO
adjustable frame



VERTIGO
adjustable frame

EQUIPMENT

STANDARD

single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)

hinges: K type – for the DIN system door frame,
C type – for the wooden door frame or the satin nickel DUO concealed ("60"- "80" – 2 pcs, "90" – 3 pcs)

door closer is not available

ADDITIONAL (available at an extra charge)

size "100"

recuperation trim

REVES system

third hinge in the door leaf:

type K, type C for a width of "60"- "80"

concealed DUO type for a width of "60"- "80"

the DUO hinge replaced with white or black colour


ventilation trim (p. 141)

bottom rail and stile set protection against excessive
moisture impact (not applicable to leaves with ventilation
trim)

door lower by 50 mm or 100 mm (rebated system)

door lower by 55 mm or 100 mm (non-rebated system)

door higher by 50 mm or 100 mm (third hinge in the door
leaf is required)

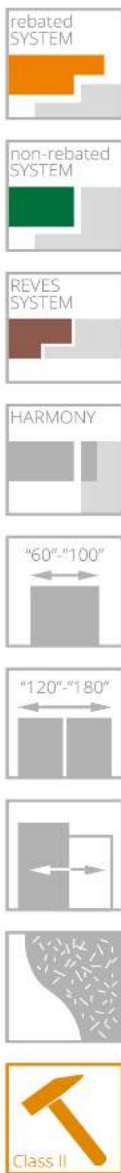

ANMI door, W00 version, SYSTEM DIN adjustable door frame

ANMI

NEW
COLOURS

- **solid construction - wooden rail and stile set**
- stable solid **chipboard in-fill**
- **3 - layer painting system** - colour fastness for many years
- large **RAL and NCS** colours palette
- **T type reinforced and DUO type adjustable hinges**



cut on the door leaf surface



ANMI door, W00 version, DIN adjustable door frame



VERSION	WBF / VZF white RAL 9003	W00 / VBF white RAL 9003	WBF / VZF grey RAL 7047	W00 / VBF grey RAL 7047
---------	-----------------------------	-----------------------------	----------------------------	----------------------------




VERSION	WBF / VZF beige NCS s2005 Y50R	W00 / VBF beige NCS s2005 Y50R	WBF / VZF black RAL 9005	W00 / VBF black RAL 9005
---------	-----------------------------------	-----------------------------------	-----------------------------	-----------------------------

COLOURS



DOOR FRAMES

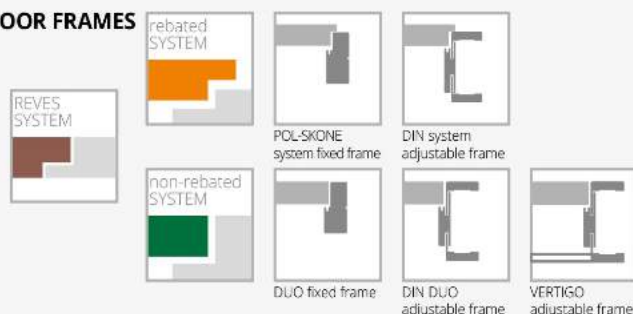

EQUIPMENT

STANDARD

single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)

silver hinges: type T – for the DIN system door frame or the concealed DUO satin nickel ("60"-70" – 2 pcs, "80"-90" – 3 pcs)

door higher than standard – a non-standard milled versions

BLACK collection rebated system: black-coloured lock, T type black-coloured hinges

BLACK collection non-rebated system: standard magnetic lock face plate and DUO hinges are black-coloured

ADDITIONAL (available at an extra charge)

size "100"

recuperation trim

REVES system

third hinge in the door leaf:

type T for a width of "60"-70"

concealed DUO type for a width of "60"-70"

the DUO hinge replaced with white or black colour

the DUO lock colour replaced with black or golden gloss colour

rebated system BLACK collection

the lock colour replaced with black colour

the T type hinge colour replaced with black colour

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis)

rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis)

reinforcement for door closer

ventilation trim (p. 141)

bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)


door lower by 50 mm or 100 mm (rebated system)

door lower by 55 mm or 100 mm (non-rebated system)

door higher by 50 mm or 100 mm (third hinge in the door leaf is required)

door higher by 150 mm or 200 mm (third hinge in the door leaf is required)

leaf edge in the colour of black, grey or graphite



LOFTY






- **solid construction – wooden rail and stile set**
- stable solid **chipboard in-fill**
- adjustable reinforced hinge type T and adjustable DUO type in black

LOFTY door, W00 version, SYSTEM DIN adjustable door frame in black 244



LOFTY door, W00 version, SYSTEM DIN adjustable door frame in black 244



for door leaves with ventilation option



ARCO door, W03P version, SYSTEM DIN adjustable door frame

ARCO



- **constructed with a high quality** MDF rail and stile set
- FSC® Mix certificate only available upon request
- door available in **10 working days** under the "fast delivery" promotion



rail and stile set - vertical wood grain, cross rails and panel - horizontal wood grain



panels, glazing




available at an extra charge: **VSG 22.1 laminated glass in the colour of black**



The mark of responsible forestry

ARCO certified
FSC® Mix available
only on customer's request

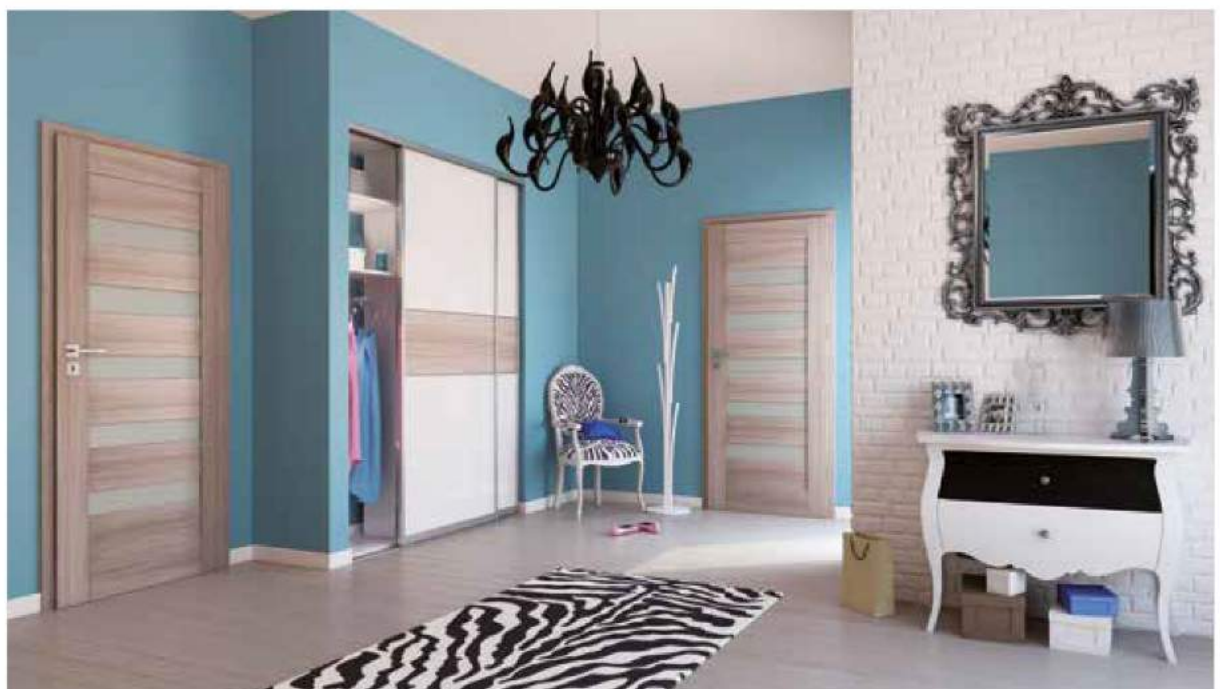

ARCO door, W02 version (door on the left side and the right side), DIN adjustable door frame



VERSION W02P / V02 W2S / V2S2 W02 / V2S5 W2D / V1SD W03P / V03 W3S / V3S2 W03 / V3S5 W5P / V4S2 W5S / V4S4 W05 / V4S3




VERSION W06 / V05 W6S1 / V5S1 W6S2 / V5S2 W6S3 / V5S3 W07 / V06 W07S1 / V6S1 W07S3 / V6S3 W08 / V07 W08S1 / V7S1 W08S4 / V7S4

COLOURS



DOOR FRAMES

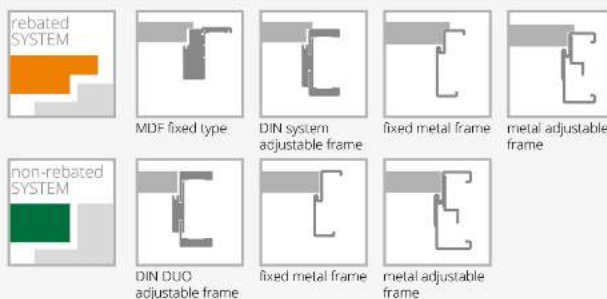


EQUIPMENT

STANDARD

white/brown matt or transparent 4 mm glass
models W2D, W5S, W05, W6S1, W6S2, W6S3 standard: tempered glass
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type B – for the DIN system door frame, type D – for the MDF, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "90" – 3 pcs)
door closer is not available
drop seal is not available

ADDITIONAL (available at an extra charge)

door lower by 50 mm (rebated system)
door lower by 55 mm (non-rebated system)
ventilation trim (p. 141)
VSG 22.1 laminated white/brown matt or transparent glass: version W02, W08, W03
tempered transparent 4 mm thick glass
VSG 22.1 laminated black glass:
version W02, W08, W03



INTER-AMBER door, F00 version, SYSTEM DIN adjustable door frame

INTER-AMBER

- **solid construction - wooden rail and stile set**
- **abundant colours** of ECO TOP and HIGH TOP surface finish
- **tempered glass pane** in AS4 and 03SD version in white or brown matt colour, thickness: 4 mm



muntin AS4



INTER-AMBER door, F06 version (door on the left side), A00 version (door on the right side), SYSTEM DIN adjustable door frame



VERSION	A00 / V00	A01 / V2S	AS4 / V2SD	03SD / V3SD	C00 / V03	C01 / V3S1	C02 / V3S2	C03 / V3S3
---------	-----------	-----------	------------	-------------	-----------	------------	------------	------------




VERSION	F00 / V06	F01 / V6S1	F02 / V6S2	F06 / V6S6	04SD / V4SD	05SD / V5SD
---------	-----------	------------	------------	------------	-------------	-------------

COLOURS



DOOR FRAMES

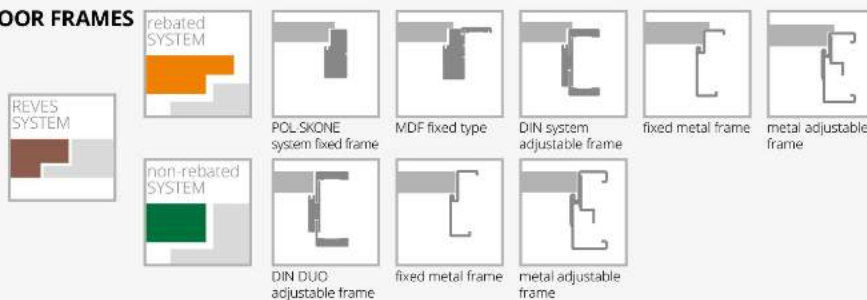

EQUIPMENT

STANDARD

white/brown matt or transparent 4 mm glass
 version AS4, 03SD standard - tempered glass pane
 white/brown matt 4 mm
 single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
 hinges: type B – for the DIN system door frame, type D – for the wooden or MDF door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"-80" – 2 pcs, "90" – 3 pcs)
 in case of door leaf with door closer and DIN system or metal frame to be used T type hinges („60“-„80" – 3 pcs, „90“-„110" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge

ADDITIONAL (available at an extra charge)

size "100" (glazing decoration as in "90")
 size "110" (glazing decoration as in "90")
 REVES system (version A00, C00, F00)
 recuperation trim
 perforated chipboard in-fill
 solid chipboard in-fill (third hinge recommended)

third hinge in the door leaf or adjustable pivot hinge:

type B, type D, type K, type C, type M for a width of "60"-80"
 concealed DUO type for a width of "60"-80"

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis)

rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis)

reinforcement for door closer

bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)

door lower by 50 mm or 100 mm (rebated system)

door lower by 55 mm or 100 mm (non-rebated system)

door higher by 50 mm or 100 mm (third hinge in the door leaf is required) (not applicable to the fixed MDF frame)


door higher by 150 mm or 200 mm (third hinge in the door leaf is required) (not applicable to the fixed MDF frame)

ventilation trim (p. 141)

tempered glass:

version C, F, 04SD, 05SD

tempered transparent 4 mm thick glass



for door leaves
with ventilation
option



SEDO

NEW
COLOUR

- **constructed with a high quality** MDF rail and stile set
- **rich UNI MAT PLUS surface**, characterised by a silky haptics and special coating resistant to fingerprints

SEDO door, W00 version, SYSTEM DIN adjustable door frame



SEDO door, W00 version, SYSTEM DIN adjustable door frame




VERSION	W00 / V00	W01 / V1SD	W02 / V02
---------	-----------	------------	-----------

COLOURS



DOOR FRAMES

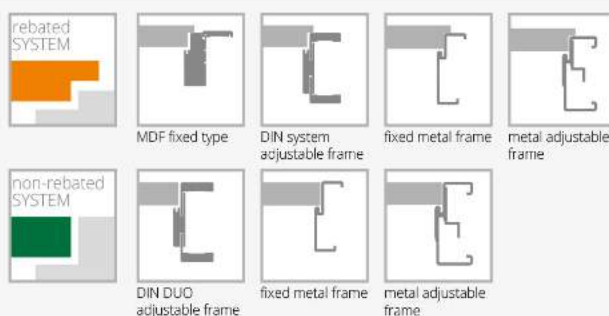


EQUIPMENT

STANDARD

version W00, W02, panel thickness: 12 mm
 version W01: white matt tempered glass pane, thickness: 4 mm
 no possibility to use VSG 22.1, VSG 33.1 laminated glass
 single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
 644 black, rebated system: lock in the colour of black, hinges in the colour of brushed nickel
 644 black, non-rebated system: lock and hinges in the colour of black
 hinges: type B – for the DIN system door frame, type D - for the MDF, type M - for the metal door frame or the hidden DUO satin nickel ("60"- "90" – 3 pcs)
 644 black: concealed DUO hinge in the colour of black
 door closer is not available
 drop seal is not available

ADDITIONAL (available at an extra charge)

door lower by 50 mm (rebated system)
 door lower by 55 mm (non-rebated system)
 ventilation trim (p. 141)
 tempered transparent 4 mm thick glass




CREATO door, A02 version, SYSTEM DIN adjustable door frame

CREATO

NEW
COLOUR

- **solid construction – wooden rail and stile set**
- stable solid **chipboard in-fill**
- **large UNI MAT PLUS surface**, characterised by a silky haptics and special coating resistant to fingerprints
- **VSG 44.2 laminated black or white glass**
- **T type reinforced and DUO type adjustable hinges**

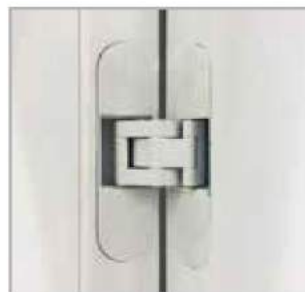

white hinge – option



CREATO door, A01 version, SYSTEM DIN adjustable door frame



BLACK LAMINATED GLASS

VERSION	A01 / V1SA	A02 / V2SA	A03 / V3SA
---------	------------	------------	------------



WHITE MATT / TRANSPARENT LAMINATED GLASS - NEW












VERSION	A01 / V1SA	A02 / V2SA	A03 / V3SA
---------	------------	------------	------------

COLOURS

UNI MAT PLUS	640 graphite	641 titano	642 white	643 beige	644 black	645 lava	646 stone	647 indigo	NEW 648 moss
--------------	--------------	------------	-----------	-----------	-----------	----------	-----------	------------	--------------

DOOR FRAMES



<div>rebated SYSTEM</div> 					
	POL-SKONE system fixed frame	DIN system adjustable frame	fixed metal frame	metal adjustable frame	
<div>non-rebated SYSTEM</div> 					
	DIN DUO adjustable frame	DUO fixed frame	VERTIGO adjustable frame	fixed metal frame	metal adjustable frame

EQUIPMENT

STANDARD

laminated glass 44.2 in the colour of black, transparent or white matt, 8.5 mm thick (glazing width in versions: A01 – 58 mm, A02 – 208 mm, A03 – 280 mm)*

versions with black laminated glass: lock and T and DUO type hinges in the colour of black

versions with white matt and transparent laminated glass: lock and hinges in the colour of silver

single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)

hinges: type T black – for the DIN system or metal door frame, type C silver – for the wooden door frame ("60"- "80" – 2 pcs, "90" – 3 pcs) or the concealed DUO, black for the non-rebated system ("60"- "70" – 2 pcs, "80"- "90" – 3 pcs)

door closer is not available

bottom rail and stile set protection against excessive moisture impact is not applicable to

ADDITIONAL (available at an extra charge)

size "100"

REVES system

third hinge in the door leaf:
type C for a width of "60"- "80"
type T for a width of "60"- "80"
concealed DUO type for a width of "60"- "70"

version A01, A02, A03 door lower by 50 mm (rebated system)

version A01, A02, A03 door lower by 55 mm (non-rebated system)

version A01, A02, A03 door higher by 100 mm (third hinge required at extra charge)

version A01, A02, A03 door higher by 200 mm (third hinge required at extra charge)




leaf edge in the colour of black

sliding system (not applicable to the version A01) p. 104-109

ventilation trim A01 with the "60" - "100" widths p. 141

ventilation trim A02, A03 with the "70" - "100" widths p. 141

white matt, graphite tempered glass, thickness: 6 mm:
version A01, A02, A03



HAPTIC door, 00 version, SYSTEM DIN adjustable door frame

HAPTIC




**NEW
COLOUR**

- **solid construction – wooden rail and stile set**
- **large UNI MAT PLUS surface**, characterised by a silky haptics and special coating resistant to fingerprints
- K and C type adjustable and DUO type concealed hinges



HAPTIC door, 00 version, SYSTEM DIN adjustable door frame

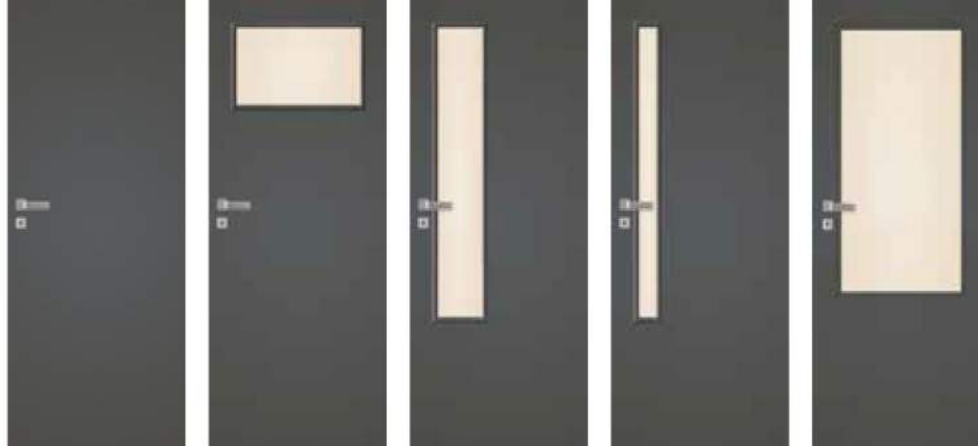


VERSION	00 / V00	02 / V2S	04 / V4SD	05 / V5SD	03SD / V3SD
---------	----------	----------	-----------	-----------	-------------

COLOURS



DOOR FRAMES

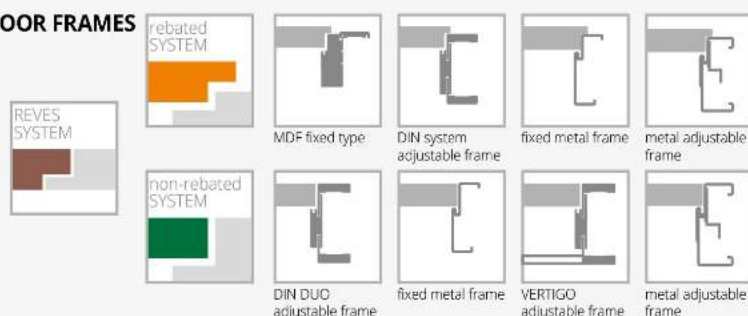

EQUIPMENT

STANDARD

white/brown matt or transparent 4 mm glass
 model 03SD standard: white/brown tempered glass, thickness: 4 mm
 single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
 hinges: type K – for the DIN system door frame, type D – for the MDF, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "80" – 2 pcs, "90" – 3 pcs)

in case of door leaf with door closer and DIN system or metal frame to be used T type hinges ("60"- "80" – 3 pcs, "90"- "110" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge

ADDITIONAL (available at an extra charge)

size "100" (glazing decoration as in "90")

size "110" (glazing decoration as in "90")

recuperation trim

REVES system (version 00)

perforated chipboard in-fill

solid chipboard in-fill (third hinge recommended)

third hinge in the door leaf or adjustable pivot hinge:

type K, type M for a width of "60"- "80"

concealed DUO type for a width of "60"- "80"

the DUO lock colour replaced with black or golden gloss colour

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis)

rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis)

reinforcement for door closer

bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)

door lower by 50 mm or 100 mm (rebated system)

door lower by 55 mm or 100 mm (non-rebated system)




door higher by 50 mm or 100 mm (not applicable to the fixed MDF frame) (third hinge in the door leaf is required)

door higher by 150 mm or 200 mm (not applicable to the fixed MDF frame) (third hinge in the door leaf is required)

ventilation trim (p. 141)

tempered glass: version 02, 04, 05

tempered transparent 4 mm thick glass



for door leaves with ventilation option



MODO door, W00 version, SYSTEM DIN adjustable door frame

MODO

NEW

NEW
COLOUR

- **solid construction** – a high quality MDF rail and stile set
- **vertical and horizontal** rail and stile set is the same 40 mm thickness
- MDF rail and stile set covered with **UNI MAT PLUS, LAMISTONE, SILKSTONE surface**
- 12 mm thick MDF panel covered with **UNI MAT PLUS, LAMISTONE, SILKSTONE surface**
- **spatial** design frame



door frame profile



MODO door, W00 version, DIN adjustable door frame



VERSION	W00 / V01	W01 / V1SD	W02 / V02
---------	-----------	------------	-----------

COLOURS




LAMISTONE CPL	250 terra oak	258 white	289 grey	531 anthracite
SILKSTONE	230 gran oak	276 Polish oak	295 merbau Royal	
UNI MAT PLUS	640 graphite	641 titano	642 white	643 beige
	644 black	645 lava	646 stone	647 indigo
				648 moss

DOOR FRAMES

rebated SYSTEM				
	MDF fixed type	DIN system adjustable frame	fixed metal frame	metal adjustable frame
non-rebated SYSTEM				
	DIN DUO adjustable frame	fixed metal frame	metal adjustable frame	

EQUIPMENT

STANDARD	ADDITIONAL (available at an extra charge)
version W01 - white matt tempered glass pane, thickness: 4 mm	door lower by 50 mm (rebated system)
single-point mortise lock in white zinc, 72 mm spacing (rebated system), in colour UNI MAT PLUS black 644, single-point mortise lock in colour black, 72 mm spacing (rebated system) or magnetic lock in colour satin nickel (non-rebated system) mortise key-operated (90 mm spacing) for a cylinder (85 mm spacing) or for a bathroom lock (90 mm spacing)	door lower by 55 mm (non-rebated system)
UNI MAT PLUS black 644 magnetic lock in black (non-rebated system) key-operated (spacing 90 mm) for an insert (spacing 85 mm) or for a bathroom lock (spacing 90 mm)	ventilation trim
hinges: type B – for the DIN system door frame, type D – for the MDF, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "90" – 3 pcs). In black UNI MAT PLUS 644 concealed hinges DUO in black.	tempered transparent 4 mm thick glass
door closer is not available	
drop seal is not available	
no possibility to use VSG 22.1, VSG 33.1 laminated glass	



for door leaves
with ventilation
option



VERI door, W02 version, SYSTEM DIN adjustable door frame

VERI

NEW

NEW
COLOUR

- **solid construction** – a high quality MDF rail and stile set
- **vertical and horizontal** rail and stile set is the same 40 mm thickness
- MDF rail and stile set covered with **UNI MAT PLUS, LAMISTONE, SILKSTONE surface**
- 12 mm thick MDF panel covered with **UNI MAT PLUS, LAMISTONE, SILKSTONE surface**
- **spatial** design frame



door frame profile



special bevel on the rail and stile joint



VERI door, W00 version, DIN DUO adjustable door frame



VERSION	W00 / V01	W01 / V1SD	W02 / V02
---------	-----------	------------	-----------

COLOURS




LAMISTONE CPL	250 terra oak	258 white	289 grey	531 anthracite
SILKSTONE	230 gran oak	276 Polish oak	295 merbau Royal	
UNI MAT PLUS	640 graphite	641 titano	642 white	643 beige
			644 black	645 lava
			646 stone	647 indigo
				648 moss
				NEW

DOOR FRAMES

rebated SYSTEM				
	MDF fixed type	DIN system adjustable frame	fixed metal frame	metal adjustable frame
non-rebated SYSTEM				
	DIN DUO adjustable frame	fixed metal frame	metal adjustable frame	

EQUIPMENT

STANDARD	ADDITIONAL (available at an extra charge)
version W01 - white matt tempered glass pane, thickness: 4 mm	door lower by 50 mm (rebated system)
mortise single point lock in white zinc, 72 mm spacing (rebated system), in colour UNI MAT PLUS black 644 mortise single point lock in black 72 mm spacing (rebated system) or magnetic lock in satin nickel (non-rebated system) key-operated (90 mm spacing) for a cylinder (85 mm spacing) or for a bathroom lock (90 mm spacing)	door lower by 55 mm (non-rebated system)
in colour UNI MAT PLUS black 644 magnetic lock in black (non-rebated system) key-operated (spacing 90 mm) for a cylinder (spacing 85 mm) or for a bathroom lock (spacing 90 mm)	ventilation trim
hinges: type B – for the DIN system door frame, type D – for the MDF, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "90" – 3 pcs)	tempered transparent 4 mm thick glass
In black UNI MAT PLUS 644 concealed hinges DUO in black.	
door closer is not available	
drop seal is not available	
no possibility to use VSG 22.1, VSG 33.1 laminated glass	



for door leaves with ventilation option



EGRO door, W00 version, SYSTEM DIN adjustable door frame

EGRO

NEW

NEW
COLOUR

- **solid construction** – a high quality MDF rail and stile set
- **vertical and horizontal** rail and stile set is the same 40 mm thickness
- MDF rail and stile set covered with **UNI MAT PLUS, LAMISTONE, SILKSTONE surface**
- 16 mm thick MDF panel covered with **UNI MAT PLUS, LAMISTONE, SILKSTONE surface**
- 16 mm thick **spatial** design frame



spatial design frame



EGRO door, W00 version, DIN adjustable door frame



VERSION	W00 / V01	W01 / V1SD	W02 / V02	W03 / V2SD
---------	-----------	------------	-----------	------------

COLOURS

LAMISTONE CPL	250 terra oak	258 white	289 grey	531 anthracite
SILKSTONE	230 gran oak	276 Polish oak	295 merbau Royal	
UNI MAT PLUS	640 graphite	641 titano	642 white	643 beige
			644 black	645 lava
			646 stone	647 indigo
				648 moss
				NEW

DOOR FRAMES

rebated SYSTEM				
	MDF fixed type	DIN system adjustable frame	fixed metal frame	metal adjustable frame
non-rebated SYSTEM				
	DIN DUO adjustable frame	fixed metal frame	metal adjustable frame	




EQUIPMENT

STANDARD

version W01, W03 - white matt tempered glass pane, thickness: 4 mm
 version W00, W02 - 16 mm thick spatial design frame
 mortise single point lock in white zinc, 72 mm spacing (rebated system), in colour UNI MAT PLUS black 644 single point mortise lock in black 72 mm spacing (rebated system) or magnetic lock in satin nickel (non-rebated system) key-operated (90 mm spacing) for a cylinder (85 mm spacing) or for a bathroom lock (90 mm spacing) in colour UNI MAT PLUS black 644 magnetic lock in black (non-rebated system) key-operated (spacing 90 mm) for a cylinder (spacing 85 mm) or for a bathroom lock (spacing 90 mm)
 hinges: type B – for the DIN system door frame, type D – for the MDF, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "90" – 3 pcs)
 In black UNI MAT PLUS 644 concealed hinges DUO in black.
 door closer is not available
 drop seal is not available
 no possibility to use VSG 22.1, VSG 33.1 laminated glass

ADDITIONAL (available at an extra charge)

door lower by 50 mm (rebated system)
 door lower by 55 mm (non-rebated system)
 ventilation trim
 tempered transparent 4 mm thick glass



for door leaves with ventilation option

FIORI



FIORI door, W02S2P version, SYSTEM DIN adjustable door frame

- constructed with a high quality MDF rail and stile set
- vertical and horizontal rail and stile set is the same 40 mm thickness



special bevel on the rail and stile joint



available at an extra charge: VSG 22.1 laminated glass in the colour of black



FIORI door, W02 version, DIN adjustable door frame







VERSION	W02 / V4S4	W02P / V04	W02S2P / V4S2
---------	------------	------------	---------------

COLOURS


LAMISTONE CPL	244 black	250 terra oak	258 white	289 grey	531 anthracite
SILKSTONE	230 gran oak	276 Polish oak	295 merbau Royal		

DOOR FRAMES

rebated SYSTEM		
	POL-SKONE system fixed frame	DIN system adjustable frame
non-rebated SYSTEM		
	DUO fixed frame	DIN DUO adjustable frame

EQUIPMENT

STANDARD	ADDITIONAL (available at an extra charge)
white/brown matt or transparent 4 mm glass	black-coloured lock rebated system
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)	the DUO hinge replaced with white or black colour
hinges: type B – for the DIN system door frame, type D – for the wooden door frame or the concealed DUO satin nickel ("60"-/90" – 3 pcs)	door lower by 50 mm (rebated system)
door closer is not available	door lower by 55 mm (non-rebated system)
drop seal is not available	ventilation trim (p. 141)
	laminated glass VSG 22.1, white-coloured or transparent (applicable to 1 glass pane)
	tempered transparent 4 mm thick glass
	the DUO lock colour replaced with black or golden gloss colour
	VSG 22.1 laminated glass in the colour of black (applicable to 1 glass pane):
	version W02, W02S2P



IMPULS door, W06 version, SYSTEM DIN adjustable door frame

IMPULS



- **solid construction – wooden rail and stile set**
- door available in **10 working days** under the "fast delivery" promotion
- **large LAMISTONE CPL and SILKSTONE** surface finish
- K and C type adjustable and DUO type concealed hinges



spacer frame profile



door frame



IMPULS door, W13 version (door on the left side), W01 version (door on the right side), SYSTEM DIN adjustable door frame



VERSION	W01 / V00	W02 / V2S	W03 / V3SD	W05 / V1SD	W06 / V4SD	W07 / V5SD	W12D1 / V6S1	W12 / V6S4	W13 / V1SA	W14 / V1SA
---------	-----------	-----------	------------	------------	------------	------------	--------------	------------	------------	------------

COLOURS

LAMISTONE CPL	231 half oak	240 whitewashed elm V	241 sand elm V	242 grey elm V	243 delano oak	244 black	247 industry 1	248 industry 2
	250 terra oak	258 white	260 white oak	263 premium walnut	265 wenge	289 grey	531 anthracite	NEW 232 segato walnut
	230 gran oak	276 Polish oak	293 Royal anthracite	294 Royal ash	295 Royal merbau	296 Polish ash	297 Royal nougat	
SILKSTONE								
SILKSTONE CPL 0,5 mm	976 Polish oak	993 Royal anthracite	994 Royal ash	995 Royal merbau	996 Polish ash	997 Royal nougat		

DOOR FRAMES

REVES SYSTEM	rebated SYSTEM	MDF fixed type	POL-SKONE system fixed frame	DIN system adjustable frame	POL-SKONE system adjustable frame	fixed metal frame	metal adjustable frame
	non-rebated SYSTEM	DUO fixed frame	DIN DUO adjustable frame	DUO adjustable frame	VERTIGO adjustable frame	fixed metal frame	metal adjustable frame

EQUIPMENT

STANDARD

white/brown matt or transparent 4 mm glass
white/brown matt tempered glass version W03, W05
version W13: white/brown matt tempered glass, thickness: 6 mm
version W14: laminated glass 44.2 in the colour of black, 8.5 mm thick
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type D – for the MDF door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "80" – 2 pcs, "90" – 3 pcs)
in case of door leaf with door closer and DIN system or metal frame to be used T type hinges ("60"- "80" – 3 pcs, "90"- "110" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge
ADDITIONAL (available at an extra charge)
size "100" (glazing decoration as in "90")
size "110" (glazing decoration as in "90")
REVES system (version W01, W13, W14)
recuperation trim (not applicable to version W13, W14)
perforated chipboard in-fill
solid chipboard in-fill (third hinge recommended)
third hinge in the door leaf or adjustable pivot hinge:
type K, type C, type M for a width of "60"- "80"
concealed DUO type for a width of "60"- "80"
the DUO lock colour replaced with black or golden gloss colour
rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis) (not applicable to version W13, W14)

rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis) (not applicable to version W13, W14)
reinforcement for door closer (not applicable to version W13, W14)
bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)
(not applicable to version W13, W14)
door lower by 50 mm or 100 mm (rebated system) (not applicable to version W13, W14)
door lower by 55 mm or 100 mm (non-rebated system) (not applicable to version W13, W14)
door higher by 50 mm or 100 mm (not applicable to version W13, W14) (not applicable to the fixed MDF frame) (third hinge in the door leaf is required)
door higher by 150 mm or 200 mm (not applicable to version W13, W14) (not applicable to the fixed MDF frame) (third hinge in the door leaf is required)
version W13, W14 door lower 1970 mm (rebated system), 1985 mm (non-rebated system)
version W13, W14 door higher by 100 mm (not applicable to the fixed MDF frame) (third hinge in the door leaf is required)
version W13, W14 door higher by 200 mm (not applicable to the fixed MDF frame) (third hinge in the door leaf is required)
ventilation trim (p. 141)
tempered glass:
version W02, W06, W07, W12D1, W12
sliding system (not applicable to version W13, W14)
tempered transparent 4 mm thick glass

p. 104-109



ETIUDA door, B1 version, SYSTEM DIN adjustable door frame

ETIUDA

NEW
COLOUR

- **solid construction – wooden rail and stile set**
- **large LAMISTONE CPL and SILKSTONE surface finish**
- white matt and graphite **tempered glass**, thickness: 6 mm
- aluminium decorative strips in the colour of silver or black
- K and C type adjustable and DUO type concealed hinges




aluminium decorative strips



option: aluminium glazing strips in the colour of black




option: aluminium decorative strips in the colour of black

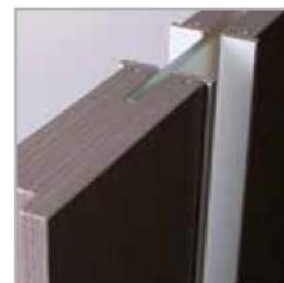

top door leaf edge without a rebate



ETIUDA door, B1 version (door on the left side), A01 version (door on the right side), POL-SKONE system fixed door frame

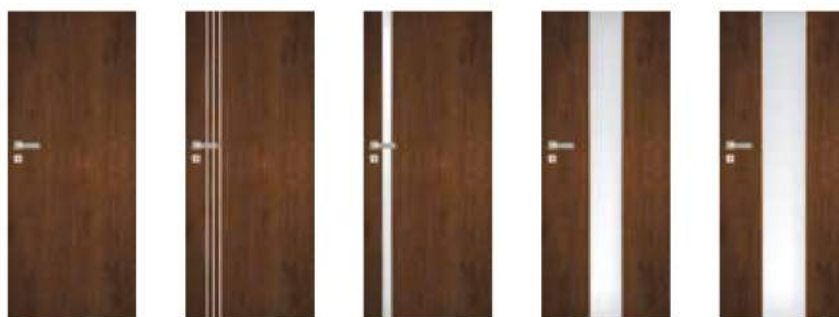


VERSION B0 / V00 B1 / VD11 A01 / V1SA A02 / V2SA A03 / V3SA

COLOURS




DOOR FRAMES

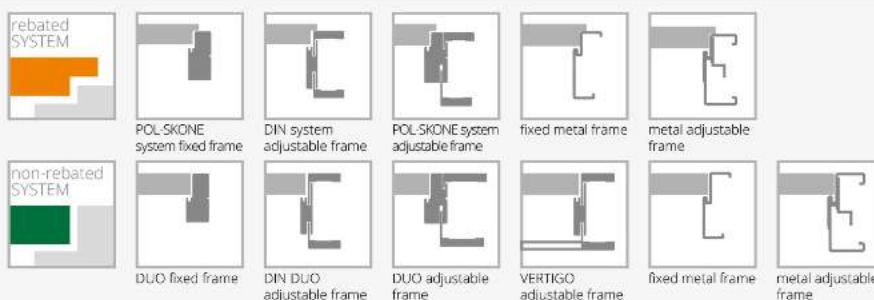

EQUIPMENT

STANDARD	
white/brown matt tempered glass, thickness: 6 mm	reinforcement for door closer (not applicable to the version A01, A02, A03)
black-coloured glass pane is not available	bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)
glazing width in the A01 version - 54 mm; A02 - 205 mm, A03 - 276 mm*	(not applicable to leaves with ventilation trim)
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)	door lower by 50 mm or 100 mm (rebated system) (not applicable to versions A01, A02, A03)
hinges: type K - for the DIN system door frame, type C - for the wooden door frame, type M - for the metal door frame or the concealed DUO satin nickel ("60"- "80" - 2 pcs, "90" - 3 pcs)	door lower by 55 mm or 100 mm (non-rebated system) (not applicable to versions A01, A02, A03)
in case of door leaf with door closer and DIN system or metal frame to be used T type hinges ("60"- "80" - 3 pcs, "90"- "110" - 4 pcs) - replacement of standard hinges with hinge type T for an extra charge	door higher by 50 mm or 100 mm (not applicable to versions A01, A02, A03) (third hinge in the door leaf is required)
ADDITIONAL (available at an extra charge)	door higher by 150 mm or 200 mm (not applicable to versions A01, A02, A03) (third hinge in the door leaf is required)
size "100"	version A01, A02, A03 door lower by 50 mm (rebated system)
size "110" (applicable to the version B0, B1)	version A01, A02, A03 door higher by 55 mm (non-rebated system)
perforated chipboard in-fill (versions B0, A01, A02, A03)	version A01, A02, A03 door higher by 100 mm (third hinge in the door leaf is required)
solid chipboard in-fill (versions B0, A01, A02, A03) (third hinge recommended)	version A01, A02, A03 door higher by 200 mm (third hinge in the door leaf is required)
third hinge in the door leaf or adjustable pivot hinge: type K, type C, type M for a width of "60"- "80"	ventilation trim (applicable to versions B0, B1) (p. 141)
concealed DUO type for a width of "60"- "80"	ventilation trim A01 with the "60" - "100" widths (p. 141)
the DUO lock colour replaced with black or golden gloss colour	ventilation trim A02, A03 with the "70" - "100" widths (p. 141)
rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis) (applicable to versions B0)	tempered 6 mm glass in the colour of graphite or transparent
rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis) (applicable to versions B0)	change of colour of decorative strips to black: version B1
	version A01-A03
	sliding system (not applicable to version A01)

*+/- 1-2 mm tolerance



SONATA door, W4 version, SYSTEM DIN adjustable door frame

SONATA



- **solid construction - wooden rail and stile set**
- stable solid **chipboard in-fill**
- **large LAMISTONE CPL and SILKSTONE** surface finish
- K and C type adjustable and DUO type concealed hinges



aluminium decors on the leaf surface in the colour of matt chrome (standard)



VERTIGO door frame, upper panel



aluminium decors on the leaf surface in the colour of black, golden gloss, chrome gloss (option) - p. 145



leaf laminated edge in the colour of black, graphite or grey - option (not applicable to the BLACK surface)



SONATA door, W2 version, VERTIGO adjustable door frame




VERSION **W1 / VD1** **W2 / VD2** **W4 / VD4** **W5 / VD5** **W6 / VD6** **W7 / VD7** **W8 / VD8**

COLOURS



DOOR FRAMES

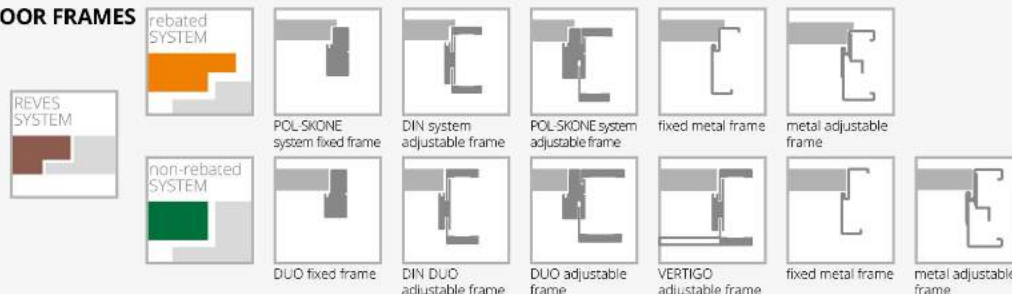

EQUIPMENT

STANDARD

single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)

hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame ("60"-80" – 2 pcs, "90" – 3 pcs) or the concealed DUO satin nickel ("60"-70" – 2 pcs, "80"-90" – 3 pcs)

in case of door leaf with door closer and DIN system or metal frame to be used T type hinges („60"-80" – 3 pcs, „90"-100" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge

version W8: no possibility to use a ventilation slot or a ventilation grill

ADDITIONAL (available at an extra charge)

size "100"

REVES system

recuperation trim

third hinge in the door leaf:

type K, type C, type M for a width of "60"-80"

concealed DUO type for a width of "60"-70"

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis) (not applicable to version W8)

rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis) (not applicable to version W8)

reinforcement for door closer

bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)

door lower by 50 mm or 100 mm (rebated system)

door lower by 55 mm or 100 mm (non-rebated system)

door higher by 50 mm or 100 mm (third hinge in the door leaf is required)



door higher by 150 mm or 200 mm (third hinge in the door leaf is required)

ventilation trim (p. 141)

aluminium edge (non-rebated system)

aluminium decors in black, chrome gloss, golden gloss

leaf edge in the colour of black, grey or graphite



for door leaves
with ventilation
option



FORTIMO door, W01S1 version, SYSTEM DIN adjustable door frame

FORTIMO

NEW
COLOUR

- solid construction – wooden rail and stile set
- large LAMISTONE CPL and SILKSTONE surface finish
- leaf stiles - vertical wood grain; panel – vertical wood grain
- white matt, brown matt, graphite or transparent **tempered glass**, thickness: 4 mm



glazing



FORTIMO door, W01S1 version, SYSTEM DIN adjustable door frame














VERSION	W01 / V01	W01S1 / V1S	W03 / V02	W03S1 / V2S
---------	-----------	-------------	-----------	-------------

COLOURS



LAMISTONE CPL	231 halif oak	240 whitewashed elm V	241 sand elm V	242 grey elm V	243 delano oak	244 black	250 terra oak	258 white	260 white oak
	263 premium walnut	265 wenge	289 grey	531 anthracite	NEW 232 segato walnut				
SILKSTONE	230 gran oak	276 Polish oak	293 Royal anthracite	294 Royal ash	295 Royal merbau	296 Polish ash	297 Royal nougat		

DOOR FRAMES

rebated SYSTEM						
	POL-SKONE system fixed frame	DIN system adjustable frame	POL-SKONE system adjustable frame	fixed metal frame	metal adjustable frame	
non-rebated SYSTEM						
	DUO fixed frame	DIN DUO adjustable frame	DUO adjustable frame	VERTIGO adjustable frame	fixed metal frame	metal adjustable frame

EQUIPMENT

STANDARD	ADDITIONAL (available at an extra charge)
white matt tempered glass, thickness: 4 mm	size "100"
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)	size "60" (applicable to W01, W01S1)
hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("70"- "80" – 2 pcs, "90" – 3 pcs)	third hinge in the door leaf: type K, type C, type M for a width of "70"- "80" concealed DUO type for a width of "70"- "80"
door closer is not available	door lower by 50 mm (rebated system)
	door lower by 55 mm (non-rebated system)
	ventilation trim (p. 141)
	VSG 22.1 laminated matt or transparent glass
	VSG 22.1 laminated black glass
	brown/graphite or transparent tempered 4 mm thick glass



INVERNO

NEW
COLOURS



INVERNO door, 01 version, SYSTEM DIN adjustable door frame

- solid construction – wooden rail and stile set
- stable solid **chipboard in-fill**
- large **LAMISTONE CPL** and **SILKSTONE** surface finish
- K and C type adjustable and DUO type concealed hinges



strip profile



INVERNO door, 00 version, SYSTEM DIN adjustable door frame




VERSION 00 / V01 OSD / V1SD 01 / V02 01SD / V2SD

COLOURS

LAMISTONE CPL	231 halif oak	243 delano oak	244 black	250 terra oak	258 white	289 grey	531 anthracite	NEW 232 segato walnut
SILKSTONE	230 gran oak	276 Polish oak	295 Royal merbau					
UNI MAT PLUS	640 graphite	641 titano	642 white	643 beige	644 black	645 lava	646 stone	NEW 647 indigo
								648 moss

DOOR FRAMES

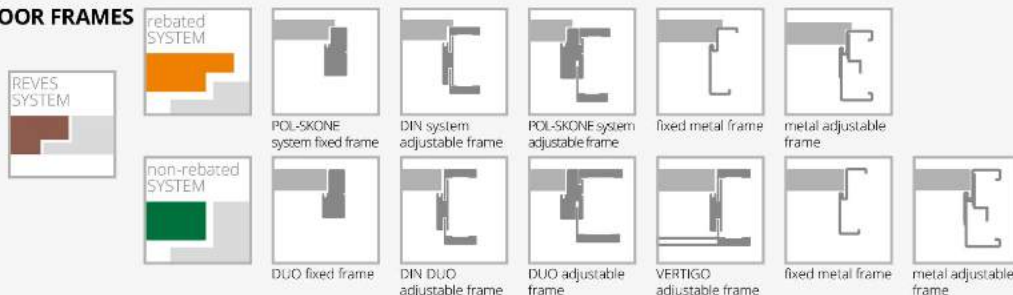


EQUIPMENT

STANDARD

versions OSD, 01SD: white matt tempered glass, thickness: 4 mm
 single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
 hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "80" – 2 pcs, "90" – 3 pcs)
 in case of door leaf with door closer and DIN system or metal frame to be used T type hinges ("60"- "80" – 3 pcs, "90"- "100" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge
 rebated system, 244, 644 black colour: hinges in the colour of silver, lock in the colour of black
 non-rebated system, 244, 644 black colour: hinges and lock in the colour of black
 transparent pane cannot be used

ADDITIONAL (available at an extra charge)

size "100" (glazing decoration as in "90")
 REVES system (version 00, 01)
 (the door opening angle is 88° above ZW4 range)
 recuperation trim
 third hinge in the door leaf:
 type K, type C, type M for a width of "60"- "80"
 concealed DUO type for a width of "60"- "80"
 change of standard DUO hinge to the colour of white
 reinforcement for door closer
 bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)
 door lower by 50 mm or 100 mm (rebated system)
 door lower by 55 mm or 100 mm (non-rebated system)
 door higher by 50 mm or 100 mm
 (third hinge in the door leaf is required)
 door higher by 150 mm or 200 mm
 (third hinge in the door leaf is required)
 ventilation trim (p. 141)



NOSTRE door, 03 version, SYSTEM DIN adjustable door frame

NOSTRE

NEW
COLOUR

- **solid construction – wooden rail and stile set**
- stable solid **chipboard in-fill**
- **large LAMISTONE CPL and SILKSTONE** surface finish
- K and C type adjustable and DUO type concealed hinges



NOSTRE door leaf decorative strip.



NOSTRE door, 03 version, SYSTEM DIN adjustable door frame



VERSION 00 / V01 0SD / V1SD 01 / V02 01SM / V2SM 01SD / V2SD




VERSION 02 / V03 02S1 / V3S1 02S3 / V3S3 03 / V04 03SD / V4SD

COLOURS



DOOR FRAMES

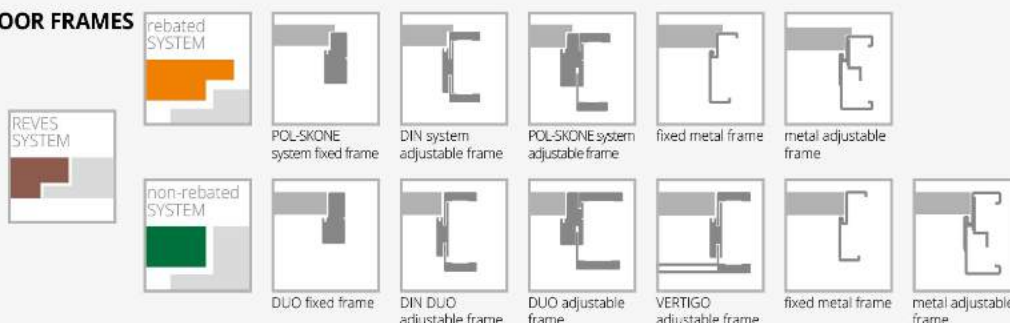

EQUIPMENT

STANDARD

white matt glass, thickness: 4 mm
 pattern 0SD, 01SD, 03SD tempered glass pane white matt, thickness: 4 mm
 single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
 hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame ("60"- "80" – 2 pcs, "90" – 3 pcs) or the concealed DUO satin nickel ("60"- "70" – 2 pcs, "80" – "90" – 3 pcs)
 in case of door leaf with door closer and DIN system or metal frame to be used T type hinges ("60"-, "80" – 3 pcs, "90"-, "100" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge

ADDITIONAL (available at an extra charge)

size "100" (glazing decoration as in "90")
 REVES system (version 00, 01, 02, 03)
 (the door opening angle is 88° above ZW4 range)

third hinge in the door leaf:
 type K, type C, type M for a width of "60"- "80"
 concealed DUO type for a width of "60"- "80"

recuperation trim

reinforcement for door closer




bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)

door lower by 50 mm or 100 mm (rebated system)

door higher by 50 mm or 100 mm
 (third hinge in the door leaf is required)

door higher by 150 mm or 200 mm
 (third hinge in the door leaf is required)

ventilation trim (p. 141)



for door leaves with ventilation option



MONA door, W02 version, SYSTEM DIN DUO adjustable door frame

MONA

- **solid construction – wooden rail and stile set**
- **large LAMISTONE CPL and SILKSTONE** surface finish
- cross rail with vertical woodgrain, black colour panel (W01, W02 version), black laminated glass (W01S1, W02S2 version)
- VSG 22.1 laminated non-transparent black glass



black matt panel



black pane



MONA door, W02 version, SYSTEM DIN DUO adjustable door frame




VERSION	W01 / V01 with black panel	W02 / V02 with black panel	W01S1 / V1S with black pane	W02S2 / V2S with black pane
----------------	-----------------------------------	-----------------------------------	------------------------------------	------------------------------------

COLOURS



DOOR FRAMES

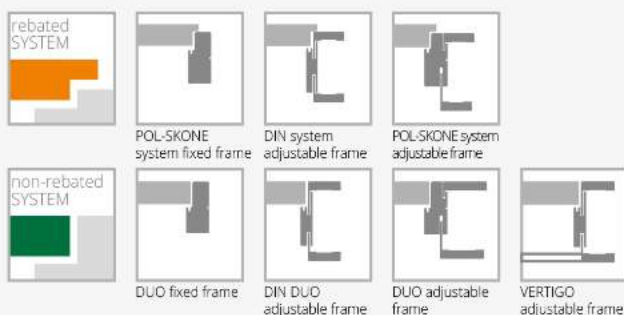

EQUIPMENT

STANDARD



VSG 22.1 laminated non-transparent black matt 4.2 mm thick glass
 single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
 hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"-80" – 2 pcs, "90" – 3 pcs)

ADDITIONAL (available at an extra charge)

size "100"
 size "60" and "60" + "60" (applicable to W01, W01S1)
 third hinge in the door leaf:
 type K, type C, type M for a width of "70"-80"
 silver or black concealed DUO type for a width of "70"-80"
 door lower by 50 mm (rebated system)
 door lower by 55 mm (non-rebated system)
 ventilation trim
 sliding system

p. 141

p. 104-109



for door leaves with ventilation option



SEMPRE door, W02 version, SYSTEM DIN adjustable door frame

SEMPRE



- **solid construction – wooden rail and stile set**
- **large LAMISTONE CPL and SILKSTONE** surface finish
- leaves available with a **one-sided magnetic board (Z/AZ)** and a **one-sided mirror (WL Z, WL A/Z)**
- K and C type adjustable and DUO type concealed hinges
- door available in **10 working days** under the "fast delivery" promotion



glazing



available at an extra charge: VSG 22.1 laminated glass in the colour of black



SEMPRE door, W02 version (door on the left side), SYSTEM DIN adjustable door frame, W02A version (door on the right side), POL-SKONE fixed door frame



VERSION **W00 / V01** **W01 / V1SD** **W04 / V4SM** **W05 / V4SD** board* mirror* **W02P / V02** **W02 / V2S5** **W02S1 / V2S1** **W02S2 / V2S2**



VERSION **W02S3 / V2S3** **W02S4 / V2S4** **W02A / V2SA** **W03P / V03** **W03 / V3S5** **W03S1 / V3S1** **W03S2 / V3S2** **W03S3 / V3S3** **W03S4 / V3S4** **W03A / V3SA**




VERSION **W06 / V05** **W07 / V06** **W05 VERSE / V6SD**

* Z, WLZ - board/mirror on the hinge side, A/Z, WLA/Z - board/mirror on the side opposite to the hinge side

COLOURS



DOOR FRAMES

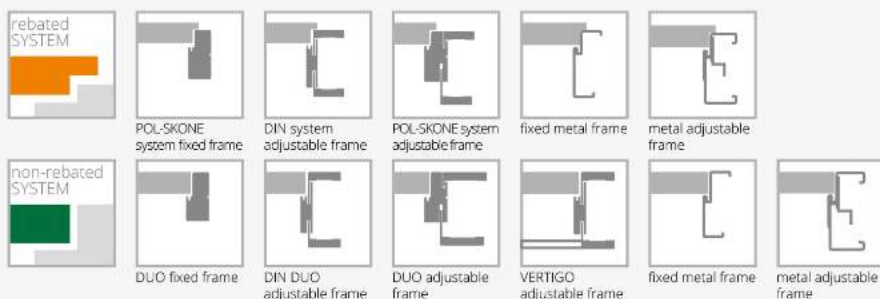



EQUIPMENT

STANDARD

white/brown/graphite or transparent 4 mm glass
version W01, W05 tempered glass 4 mm
version W00, W06, W07, panel thickness: 12 mm
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type K satin nickel – for the DIN system door frame, type C satin nickel – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "80" – 2 pcs, "90" – 3 pcs)
door closer is not available
drop seal is not available
version W05 VERSE - applicable to "70" - "100" width

ADDITIONAL (available at an extra charge)

size "100"
third hinge in the door leaf:
type K, type C, type M for a width of "60"- "80"
concealed DUO type for a width of "60"- "70"
door lower by 50 mm (rebated system) (not applicable to WLZ, WLA/Z)
door lower by 55 mm (non-rebated system)
(not applicable to WLZ, WLA/Z)
door higher by 50 mm or 100 mm (not applicable to WLZ, WLA/Z)
(third hinge in the door leaf is required)
ventilation trim (p. 141)
VSG 22.1 laminated black glass:
version W02, W03
tempered transparent 4 mm thick glass



for door leaves with ventilation option



SEMPRE ONDA door, W03 version, SYSTEM DIN adjustable door frame

SEMPRE ONDA


- solid construction – wooden rail and stile set
- large LAMISTONE CPL and SILKSTONE surface finish
- cross rails have horizontal wood grain and **grooved surface**
- K and C type adjustable and DUO type concealed hinges



panel – grooving



glazing

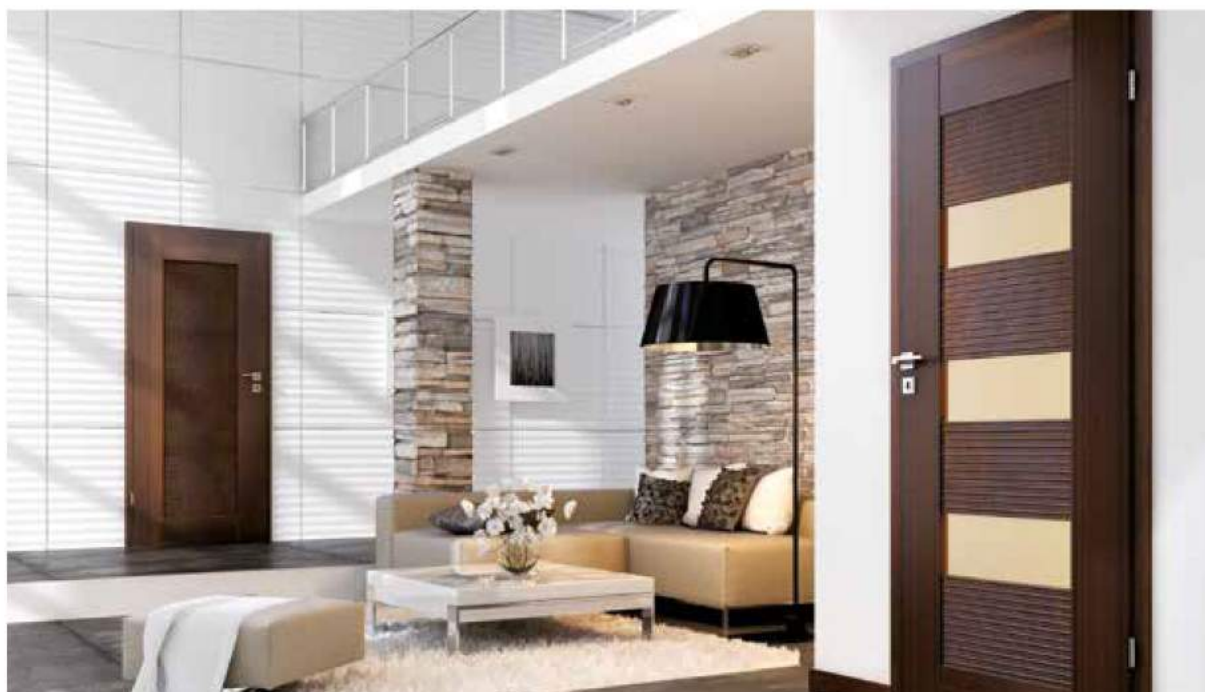

SEMPRE ONDA door, W00 version (door on the left side), W03 version (door on the right side), SYSTEM DIN adjustable door frame




VERSION	W00 / V01	W03 / V2S3	W04 / V3S4	W05 / V4S3	W07 / V3S2	W08 / V4S1
---------	-----------	------------	------------	------------	------------	------------

COLOURS






DOOR FRAMES

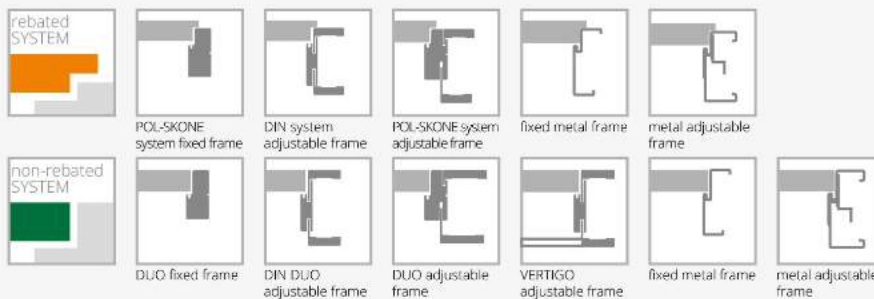

EQUIPMENT

STANDARD	ADDITIONAL (available at an extra charge)
white/brown/graphite satin or transparent 4 mm glass	size "100"
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)	third hinge in the door leaf: type K, type C, type M for a width of "60"- "80" concealed DUO type for a width of "60"- "70"
hinges: type K satin nickel – for the DIN system door frame, type C satin nickel – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "80" – 2 pcs, "90" – 3 pcs)	door lower by 50 mm (rebated system)
door closer is not available	door lower by 55 mm (non-rebated system)
drop seal is not available	door higher by 50 mm or 100 mm (third hinge in the door leaf is required)
	ventilation trim (p. 141)
	tempered transparent 4 mm thick glass



DECO door, 00 version, SYSTEM DIN adjustable door frame

DECO



NEW
COLOUR

- solid construction – wooden rail and stile set
- surface is covered with a 0.2 mm, 0.5 mm or 0.7 mm thick CPL laminate, which is resistant to abrasion and chemicals
- door available also in III mechanical class
- K and C type adjustable and DUO type concealed hinges



spacer frame



glazing



DECO door, 05 version, SYSTEM DIN adjustable door frame



VERSION	00 / V00	02 / V25	03SD / V3SD	04 / V4SD	05 / V5SD
---------	----------	----------	-------------	-----------	-----------

To obtain mechanical class III, you need to order the door leaf with a metal door frame, a wooden door frame or an adjustable DIN mechanical class III frame.

DIN system door frame in III mechanical class, contains reinforcement under the catch plate in the form of a pine bar. Angular catch plate at extra charge added to the adjustable DIN system door frame price.


COLOURS

COLOURS	<div>SILKSTONE CPL 0,5 mm</div> <div><div>976</div><div>Polish oak</div></div> <div><div>993</div><div>Royal anthracite</div></div> <div><div>994</div><div>Royal ash</div></div> <div><div>995</div><div>Royal merbau</div></div> <div><div>996</div><div>Polish ash</div></div> <div><div>997</div><div>Royal nougat</div></div>														
LAMINATED CPL 0,2 mm	<div>820</div> <div>white</div>	<div>222</div> <div>grey</div>	<div>223</div> <div>cherry</div>	<div>229</div> <div>oak</div>	<div>821</div> <div>anthracite</div>	<div>863</div> <div>premium walnut</div>	<div>847</div> <div>industry 1</div>	<div>848</div> <div>industry 2</div>	<div>849</div> <div>industry 3</div>	<div>225</div> <div>terra oak</div>	<div>227</div> <div>delano oak</div>	<div>844</div> <div>black</div>	<div>280</div> <div>halif oak</div>	<div>228</div> <div>segato walnut</div>	NEW
LAMINATED CPL 0,5 mm*	<div>945</div> <div>white structure</div>	<div>252</div> <div>oak</div>	<div>922</div> <div>grey structure</div>	<div>926</div> <div>anthracite structure</div>	<div>965</div> <div>wenge</div>	<div>923</div> <div>cherry</div>	<div>963</div> <div>premium walnut</div>	<div>947</div> <div>industry 1</div>	<div>948</div> <div>industry 2</div>	<div>825</div> <div>terra oak</div>	<div>946</div> <div>black structure</div>	<div>961</div> <div>halif oak</div>			
LAMINATED CPL 0,7 mm*	<div>745</div> <div>white structure</div>	<div>722</div> <div>grey structure</div>	<div>779</div> <div>oak</div>	<div>726</div> <div>anthracite structure</div>	<div>765</div> <div>wenge</div>	<div>723</div> <div>cherry</div>	<div>763</div> <div>premium walnut</div>	<div>747</div> <div>industry 1</div>	<div>748</div> <div>industry 2</div>	<div>725</div> <div>terra oak</div>	<div>746</div> <div>black structure</div>	<div>761</div> <div>halif oak</div>			
LAMINATED HPL*													*available upon consultation with the sales department For door leaves with structure laminate, frame surface with plain laminate.		

*available upon consultation with the sales department

For door leaves with structure laminate, frame surface with plain laminate.

DOOR FRAMES

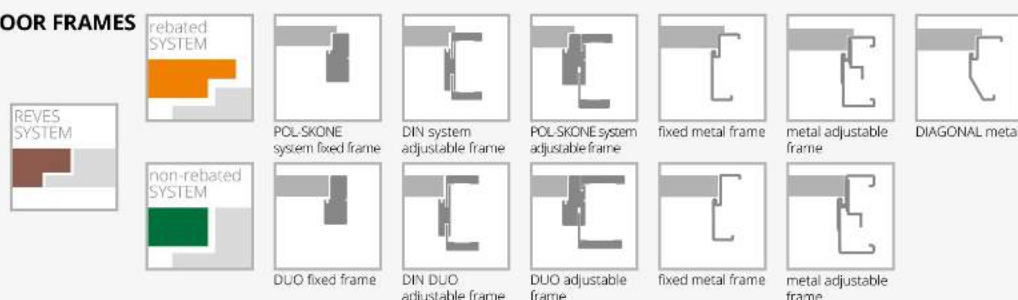



EQUIPMENT

STANDARD

white matt or transparent 4 mm thick glass
white matt tempered glass plate (version 03SD, leaves - mechanical class III)
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
lock with stainless steel face plate (leaves - mechanical class III)
hinges: type K - for the DIN system door frame, type C - for the wooden door frame, type M - for the metal door frame or the concealed DUO satin nickel ("60"-80" - 2 pcs, "90" - 3 pcs)
hinges: type K (leaves - mechanical class III) - 3 pcs
in case of door leaf with door closer and DIN system or metal frame to be used T type hinges ("60"-80" - 3 pcs, "90"-110" - 4 pcs) - replacement of standard hinges with hinge type T for an extra charge
ADDITIONAL (available at an extra charge)
size "100" (glazing decoration as in "90")
size "110" (glazing decoration as in "90")
REVES system (version 00)
recuperation trim
CPL laminate available at an extra charge 0.5 mm, 0.7 mm ("60" - "80")*
CPL laminate available at an extra charge 0.5 mm, 0.7 mm ("90" - "110")*
extra charge for SILKSTONE CPL colours
perforated chipboard in-fill

solid chipboard in-fill (third hinge recommended)
third hinge in the door leaf or adjustable pivot hinge: type K, type C, type M for a width of "60"-80" type T
concealed DUO type for a width of "60"-70"
rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis)
rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis)
reinforcement for door closer
bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)
door lower by 50 mm or 100 mm (rebated system)
door lower by 55 mm or 100 mm (non-rebated system)
non-standard height
door higher by 50 mm or 100 mm (third hinge in the door leaf is required)
door higher by 150 mm or 200 mm (third hinge in the door leaf is required)
ventilation trim (p. 141)
tempered glass (version 02, 04, 05)
tempered transparent 4 mm thick glass
edges in other colours - black, grey, graphite - are available

*an extra charge to the standard height



for door leaves with ventilation option



SEMPRE LUX door, W04 version, SYSTEM DIN adjustable door frame

SEMPRE LUX



- **solid construction – wooden rail and stile set**
- **natural veneers** surface finish
- **ecological UV varnish** ensures incredible permanence of colour and scratch resistance
- leaves available with a **one-sided magnetic board (Z/AZ)** and a **one-sided mirror (WL Z, WL A/Z)**
- K and C type adjustable and DUO type concealed hinges



rail and stile set wood grain



wood grain of panels - horizontal



SEMPRE LUX door, W03S4 version, POL-SKONE SYSTEM adjustable door frame



VERSION	W00 / V01	W01 / V1SD	W04 / V4SM	W05 / V4SD	board* Z A/Z	mirror* WLZ WLA/Z	W02P / V02	W02 / V2S5	W02S1 / V2S1	W02S2 / V2S2
---------	-----------	------------	------------	------------	-----------------	----------------------	------------	------------	--------------	--------------



VERSION	W02S3 / V2S3	W02S4 / V2S4	W02A / V2SA	W03P / V03	W03 / V3S5	W03S1 / V3S1	W03S2 / V3S2	W03S3 / V3S3	W03S4 / V3S4	W03A / V3SA
---------	--------------	--------------	-------------	------------	------------	--------------	--------------	--------------	--------------	-------------

* Z, WLZ - board/mirror on the hinge side, A/Z, WLA/Z - board/mirror on the side opposite to the hinge side














COLOURS

VENEERED GROUP A					
	311 bright oak	312 swiss pine	334 European oak		
VENEERED GROUP B					
	323 rustic oak	340 ebony	351 marrone	376 steel oak	
					
	404 dark walnut	405 bright walnut	421 cappuccino	422 mocca	424 teak
VENEERED GROUP C					
	370 white-stained oak				



VERSION	W06 / V05	W07 / V06	W05 VERSE / V6SD
---------	-----------	-----------	------------------

DOOR FRAMES

 rebated SYSTEM						
	POL-SKONE system fixed frame	DIN system adjustable frame	POL-SKONE system adjustable frame	fixed metal frame	metal adjustable frame	
 non-rebated SYSTEM						
	DUO fixed frame	DIN DUO adjustable frame	DUO adjustable frame	VERTIGO adjustable frame	fixed metal frame	metal adjustable frame


EQUIPMENT

STANDARD

white/brown/graphite or transparent 4 mm glass
 version W01, W05 – tempered glass pane 4 mm
 version W00, panel thickness: 12 mm
 single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
 hinges: type K satin nickel – for the DIN system door frame, type C satin nickel – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "80" – 2 pcs, "90" – 3 pcs)
 door closer is not available
 drop seal is not available
 version W05 VERSE - applicable to "70" - "100" width

ADDITIONAL (available at an extra charge)

size "100"
 third hinge in the door leaf:
 type K, type C, type M for a width of "60"- "80"
 concealed DUO type for a width of "60"- "80"
 door lower by 50 mm (rebated system) (not applicable to WLZ, WLA/Z)
 door lower by 55 mm (non-rebated system) (not applicable to WLZ, WLA/Z)
 door higher by 50 mm or 100 mm (not applicable to WLZ, WLA/Z) (third hinge in the door leaf is required)
 ventilation trim (p. 141)
VSG 22.1 laminated black glass:
 version W02, W03
 tempered transparent 4 mm thick glass



ESPINA door, W01 version, SYSTEM DIN adjustable door frame

ESPINA



- **solid construction - wooden rail and stile set**
- stable solid **chipboard in-fill**
- **perfect combination** of black and natural veneer
- ecological UV varnish ensures incredible permanence of colour and scratch resistance
- white matt **tempered glass**, thickness: 6 mm or laminated glass VSG 44.2 in the colour of black, 8.5 mm thick
- K and C type adjustable and DUO type concealed hinges



wood grain



ESPINA door, W01 version, SYSTEM DIN door frame




VERSION	W00 / V00	W01 / V1S	W01 / V1S	W02 / V01
---------	-----------	-----------	-----------	-----------

COLOURS



DOOR FRAMES

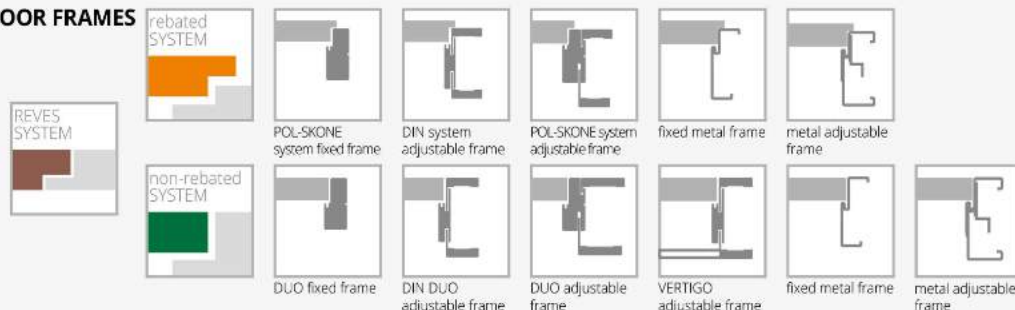

EQUIPMENT

STANDARD

white matt tempered glass, thickness: 6 mm
laminated glass 44.2 in the colour of black, 8.5 mm thick
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame ("60"-80" – 2 pcs, "90" – 3 pcs) or the concealed DUO satin nickel ("60"-70" – 2 pcs, "80"-90" – 3 pcs)
in case of door leaf with door closer and DIN system or metal frame to be used T type hinges ("60", "80" – 3 pcs, "90", "110" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge
no possibility to make W01 version in sliding system

ADDITIONAL (available at an extra charge)

size "100"
size "110" (applicable to version W00, W02)
REVES system (version W00, W02, W01 - **NEW**)
recuperation trim

third hinge in the door leaf:

type K, type C, type M for a width of "60"-80"
concealed DUO type for a width of "60"-80"

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis) not applicable to W01

reinforcement for door closer (not applicable to W01 version)

bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)



door lower by 50 mm or 100 mm (rebated system)

door lower by 55 mm or 100 mm (non-rebated system)

door higher by 50 mm or 100 mm (third hinge in the door leaf is required)

door higher by 150 mm or 200 mm (third hinge in the door leaf is required)

ventilation trim (version W00, W01, W02) (p. 141)



DECO LUX door, 00 version, SYSTEM DIN adjustable door frame

DECO LUX

with the Soft frame



- **solid construction – wooden rail and stile set**
- door covered with **natural veneers**
- **ecological UV varnish** ensures incredible permanence of colour and scratch resistance
- K and C type adjustable and DUO type concealed hinges



DECO LUX door, 00 version, SYSTEM DIN door frame




VERSION	00 / V00	02 / V2S	03SD / V3SD	04 / V4SD	05 / V5SD
---------	----------	----------	-------------	-----------	-----------

COLOURS



DOOR FRAMES

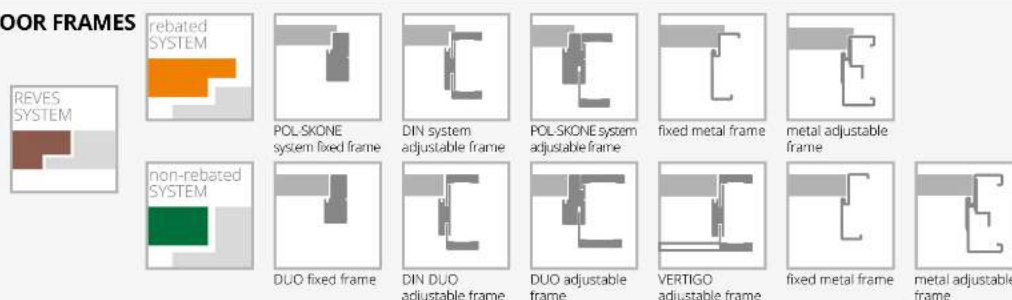

EQUIPMENT

STANDARD

white matt or transparent 4 mm thick glass

version 03SD: white matt tempered glass

single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)

hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "80" – 2 pcs, "90" – 3 pcs)

in case of door leaf with door closer and DIN system or metal frame to be used T type hinges ("60"- "80" – 3 pcs, "90"- "110" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge

ADDITIONAL (available at an extra charge)

size "100" (glazing decoration as in "90")

size "110" (glazing decoration as in "90")

REVES system (version 00)

recuperation trim

perforated chipboard in-fill

solid chipboard in-fill (third hinge recommended)

third hinge in the door leaf:

type K, type C, type M for a width of "60"- "80"

concealed DUO type for a width of "60"- "80"

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis)

rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis)

reinforcement for door closer

bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)

door lower by 50 mm or 100 mm (rebated system)

door lower by 55 mm or 100 mm (non-rebated system)

door higher by 50 mm or 100 mm (third hinge in the door leaf is required)

door higher by 150 mm or 200 mm (third hinge in the door leaf is required)


ventilation trim (p. 141)

tempered glass (version 02, 04, 05)

tempered transparent 4 mm thick glass

DECO LUX door in mechanical class III available on request

technical door catalogue




ETIUDA LUX door, A01 version, SYSTEM DIN adjustable door frame

ETIUDA LUX

- **solid construction – wooden rail and stile set**
- door covered with **natural veneers**
- **ecological UV varnish** ensures incredible permanence of colour and scratch resistance
- white matt or graphite **tempered glass**, thickness: 6 mm
- aluminium decorative strips in the colour of silver or black
- K and C type adjustable and DUO type concealed hinges



aluminium decorative strips
in the colour of silver or black



top door leaf edge without a rebate



option: aluminium decorative strips
in the colour of black



ETIUDA LUX door, A02 version, SYSTEM DIN adjustable door frame
















VERSION	B0 / V00	B1 / VD11	A01 / V1SA	A02 / V2SA	A03 / V3SA
---------	----------	-----------	------------	------------	------------

COLOURS

VENEERED GROUP A						
	311 bright oak	312 swiss pine	334 European oak			
VENEERED GROUP B						
	323 rustic oak	340 ebony	351 marrone	376 steel oak		
						
	390 natural walnut	404 dark walnut	405 bright walnut	421 cappuccino	422 mocca	424 teak

DOOR FRAMES

rebated SYSTEM							
		POL-SKONE system fixed frame	DIN system adjustable frame	POL-SKONE system adjustable frame	fixed metal frame	metal adjustable frame	
non-rebated SYSTEM							
		DUO fixed frame	DIN DUO adjustable frame	DUO adjustable frame	VERTIGO adjustable frame	fixed metal frame	metal adjustable frame

EQUIPMENT



STANDARD

white/brown matt tempered glass, thickness: 6 mm
black-coloured glass pane is not available
glazing width in the A01 version – 54 mm; A02 – 205 mm, A03 – 276 mm*
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "80" – 2 pcs, "90" – 3 pcs)

ADDITIONAL (available at an extra charge)

size "100"
size "110" (applicable to version B0, B1)
solid chipboard in-fill (version B0, A01, A02, A03) (third hinge recommended)
third hinge in the door leaf:
type K, type C, type M for a width of "60"- "80"
concealed DUO type for a width of "60"- "80"
rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis) (applicable to version B0)
rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis) (applicable to version B0)
change of colour of decorative strips to black:
version B1
version A01-A03
*+/- 1-2 mm tolerance

reinforcement for door closer (not applicable to version A01, A02, A03)
bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim) (not applicable to version A01, A02, A03)
door lower by 50 mm or 100 mm (rebated system) (not applicable to version A01, A02, A03)
door lower by 55 mm or 100 mm (non-rebated system) (not applicable to version A01, A02, A03)
door higher by 50 mm or 100 mm (not applicable to version A01, A02, A03) (third hinge in the door leaf is required)
door higher by 150 mm or 200 mm (not applicable to version A01, A02, A03) (third hinge in the door leaf is required)
version A01, A02, A03 door lower by 50 mm (rebated system)
version A01, A02, A03 door lower by 55 mm (non-rebated system)
version A01, A02, A03 door higher by 100 mm (third hinge in the door leaf is required)
version A01, A02, A03 door higher by 200 mm (third hinge in the door leaf is required)
ventilation trim (applicable to versions B0) (p. 141)
ventilation trim A01 with the "60" - "100" widths (p. 141)
ventilation trim A02, A03 with the "70" - "100" widths (p. 141)
tempered 6 mm glass in the colour of graphite or transparent
sliding system (not applicable to version A01)



for door leaves with ventilation option



FORTIMO LUX door, W03 version, SYSTEM DIN adjustable door frame

FORTIMO LUX

- **solid construction – wooden rail and stile set**
- door covered with **natural veneers**
- **ecological UV varnish** ensures incredible permanence of colour and scratch resistance
- cross rails come with a **vertical wood grain**
- white and brown matt, graphite or transparent **tempered glass**, thickness: 4 mm
- K and C type adjustable and DUO type concealed hinges



glazing, panel



interconnection of architraves at the 45° angle



FORTIMO LUX door, W03S1 version, SYSTEM VERTIGO adjustable door frame
















VERSION	W01 / V01	W01S1 / V1S	W03 / V02	W03S1 / V2S
---------	-----------	-------------	-----------	-------------

COLOURS


VENEERED GROUP A						
	311 bright oak	312 swiss pine	334 European oak			
VENEERED GROUP B						
	323 rustic oak	340 ebony	351 marrone	376 steel oak		
VENEERED GROUP C						
	390 natural walnut	404 dark walnut	405 bright walnut	421 cappuccino	422 mocca	424 teak
VENEERED GROUP C						
	370 white-stained oak					

DOOR FRAMES

rebated SYSTEM							
		POL SKONE system fixed frame	DIN system adjustable frame	POL SKONE system adjustable frame	fixed metal frame	metal adjustable frame	
non-rebated SYSTEM							
		DUO fixed frame	DIN DUO adjustable frame	DUO adjustable frame	VERTIGO adjustable frame	fixed metal frame	metal adjustable frame

EQUIPMENT

STANDARD	ADDITIONAL (available at an extra charge)
white matt tempered glass, thickness: 4 mm	size "100"
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)	size "60" (applicable to W01, W01S1)
hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("70"- "80" – 2 pcs, "90" – 3 pcs)	third hinge in the door leaf: type K, type C, type M for a width of "60"- "80" concealed DUO type for a width of "60"- "80"
	door lower by 50 mm (rebated system)
	door lower by 55 mm (non-rebated system)
	laminated glass VSG 22.1 matt, transparent or black
	ventilation trim (p. 141)
	brown/graphite or transparent tempered 4 mm thick glass




SONATA LUX door, W5 version, SYSTEM DIN adjustable door frame

SONATA LUX


- **solid construction - wooden rail and stile set**
- **stable solid chipboard** in-fill
- door covered with **natural veneers**
- **ecological UV varnish** ensures incredible permanence of colour and scratch resistance
- **aluminium decors** on the leaf surface in the colour of black, golden gloss, chrome gloss
- K and C type adjustable and DUO type concealed hinges



SONATA LUX door, W2 version, DIN adjustable door frame

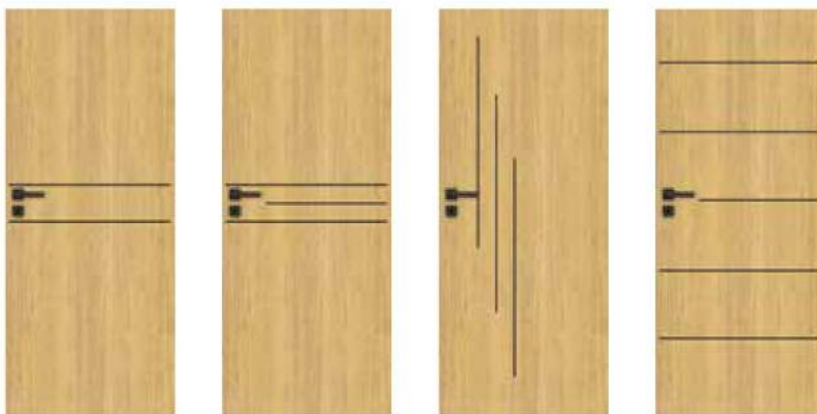

VERSION **W1 / VD1** **W2 / VD2** **W4 / VD4** **W5 / VD5**

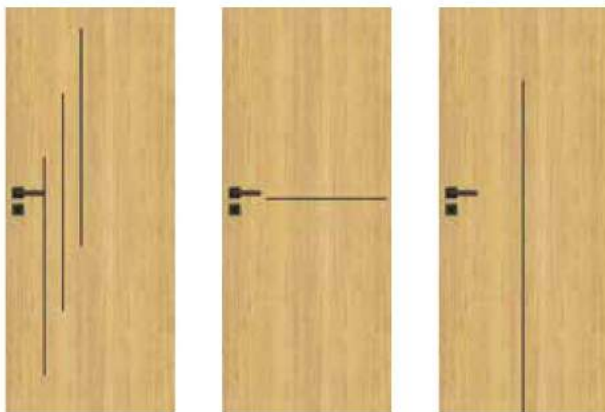


VERSION **W6 / VD6** **W7 / VD7** **W8 / VD8**

COLOURS



DOOR FRAMES

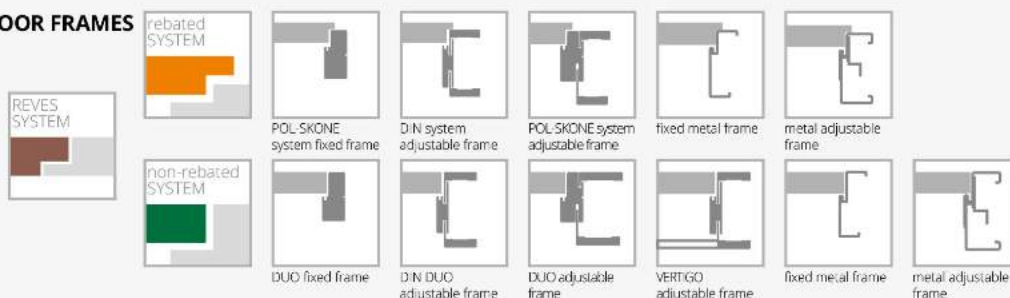

EQUIPMENT

STANDARD

single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – for the metal door frame or the concealed DUO satin nickel ("60"- "70" – 2 pcs, "80"- "90" – 3 pcs) in case of door leaf with door closer and DIN system or metal frame to be used T type hinges („60“- „80" – 3 pcs, „90“- „100" – 4 pcs) - replacement of standard hinges with hinge type T for an extra charge
version W8: no possibility to use a ventilation slot or a ventilation grill

ADDITIONAL (available at an extra charge)

size "100"
REVES system
recuperation trim
third hinge in the door leaf:
type K, type C, type M for a width of "60"- "80"
concealed DUO type for a width of "60"- "70"
the type T hinge in colour of black (rebated system)
the DUO hinge colour replaced with black colour (non-rebated system)

the HOBES lock colour replaced with black colour (rebated system)

the DUO lock colour replaced with black colour (non-rebated system)

rail and stile set (allowing the user to shorten the door leaf by max. 50 mm on a do-it-yourself basis) (not applicable to version W8)

rail and stile set (allowing the user to shorten the door leaf by max. 90 mm on a do-it-yourself basis) (not applicable to version W8)

reinforcement for door closer

bottom rail and stile set protection against excessive moisture impact

(not applicable to leaves with ventilation trim)

door lower by 50 mm (rebated system)

door lower by 55 mm (non-rebated system)




door higher by 50 mm or 100 mm (third hinge in the door leaf is required)

door higher by 150 mm or 200 mm (third hinge in the door leaf is required)

ventilation trim (p. 141)

aluminium decors in black, chrome gloss, golden gloss

leaf edge in the colour of black



for door leaves
with ventilation
option



INTERSOLID door, 02 version, SYSTEM DIN adjustable door frame

INTERSOLID



- **solid construction – wooden rail and stile set**
- door covered with **natural veneers**
- **ecological UV varnish** ensures incredible permanence of colour and scratch resistance
- K and C type adjustable hinges



INTERSOLID frame



INTERSOLID door, 05 version (door on the left side), 05 S8 version (door on the right side), SYSTEM DIN adjustable door frame









VERSION	02 / V02	02S6 / V2S6	05 / V05	05S8 / V5S8	08 / V08	08S10 / V8S10
---------	----------	-------------	----------	-------------	----------	---------------

COLOURS




VENEERED GROUP A							
	311 bright oak	312 swiss pine	334 European oak				
VENEERED GROUP B							
	323 rustic oak	340 ebony	404 dark walnut	405 bright walnut	421 cappuccino	422 mocca	424 teak

DOOR FRAMES

					
	POL-SKONE system fixed frame	DIN system adjustable frame	POL-SKONE system adjustable frame	fixed metal frame	metal adjustable frame

EQUIPMENT

STANDARD	ADDITIONAL (available at an extra charge)
white matt or transparent 4 mm thick glass	size "100"
single-point mortise lock, spacing: 72 mm key-operated or cylinder type, for a cylinder or a bathroom lock	third hinge in the door leaf: type K, type C, type M for a width of "60"- "80"
hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – door leaf for the metal door frame ("60"- "80" – 2 pcs, "90" – 3 pcs)	bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)
	door lower by 50 mm
	door higher by 50 mm or 100 mm (third hinge in the door leaf is required)
	ventilation trim (p. 141)
	white matt or transparent tempered 4 mm thick glass



for door leaves
with ventilation
option



INTERSOLID II door, 02 S6 version, SYSTEM DIN adjustable door frame

INTERSOLID II



- **solid construction – wooden rail and stile set**
- door covered with **natural veneers**
- **ecological UV varnish** ensures incredible permanence of colour and scratch resistance
- **milled panel**
- K and C type adjustable hinges



wooden muntin



door leaf profile



INTERSOLID II door, 02 version, adjustable door frame



VERSION **01 / V01** **01S6 / V1S6** **02 / V02** **02S6 / V2S6** **03 / V03** **03S6 / V3S6** **04 / V04** **04S8 / V4S8** **05 / V05**




VERSION **05S8 / V5S8** **06 / V06** **06S8 / V6S8** **07 / V07** **07S10 / V7S10** **08 / V08** **08S10 / V8S10** **09 / V09** **09S10 / V9S10**

COLOURS



DOOR FRAMES

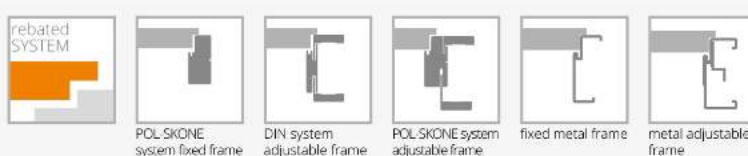

EQUIPMENT

STANDARD

white matt or transparent 4 mm thick glass

single-point mortise lock, spacing: 72 mm key-operated or cylinder type, for a cylinder or a bathroom lock

hinges: type K – for the DIN system door frame, type C – for the wooden door frame, type M – door leaf for the metal door frame ("60"- "80" – 2 pcs, "90" – 3 pcs)

ADDITIONAL (available at an extra charge)

size "100"

third hinge in the door leaf:

type K, type C, type M for a width of "60"- "80"



bottom rail and stile set protection against excessive moisture impact (not applicable to leaves with ventilation trim)

door lower by 50 mm

door higher by 50 mm or 100 mm (third hinge in the door leaf is required)

ventilation trim (p. 141)

white matt or transparent tempered 4 mm thick glass



for door leaves with ventilation option.



PASSO door, W05 version, SYSTEM DIN DUO adjustable door frame

PASSO

NEW
COLOUR

- **solid construction – wooden rail and stile set**
- large LAMISTONE CPL, SILKSTONE and **natural veneers surface finish**
- stile - vertical or horizontal wood grain (version H), horizontal cross rails
- 24 mm thick panels
- K and C type adjustable and DUO type concealed hinges



rail and stile set, cross rails and glass pane connection



top door leaf edge without a rebate



PASSO door, W03 version (door on the left side), W02 (door on the right side), DUO adjustable door frame










VERSION	W01 / V01	W02 / V1S1	W03 / V1S2	W04 / V1S3	W05 / V1S4	W06 / V2SD	W07 / V3SD
---------	-----------	------------	------------	------------	------------	------------	------------

COLOURS

LAMISTONE CPL	231 halif oak	243 delano oak	244 black	250 terra oak	258 white	260 white oak
	263 premium walnut	265 wenge	289 grey	531 anthracite	NEW 232 segato walnut	
SILKSTONE	230 gran oak	254 Royal anthracite H	255 Polish ash H	276 Polish oak	293 Royal anthracite	294 Royal ash
	295 Royal merbau	296 Polish ash	297 Royal nougat	299 Royal ash H		
VENEERED GROUP A	312 swiss pine	334 European oak				
VENEERED GROUP B	340 ebony	376 steel oak	404 dark walnut	405 bright walnut	421 cappuccino	422 mocca
					424 teak	

DOOR FRAMES

rebated SYSTEM				
	POL-SKONE system fixed frame	DIN system adjustable frame	POL-SKONE system adjustable frame	
non-rebated SYSTEM				
	DUO fixed frame	DIN DUO adjustable frame	DUO adjustable frame	VERTIGO adjustable frame


EQUIPMENT

STANDARD

painted white/brown matt or transparent 4 mm glass
 single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
 hinges: type K – for the DIN system door frame, type C – for the wooden door frame or the concealed DUO satin nickel ("60"-80" – 2 pcs, "90" – 3 pcs)
 door closer is not available
 drop seal is not available

ADDITIONAL (available at an extra charge)

third hinge in the door leaf:
 type K, type C for a width of "60"-80"
 concealed DUO type for a width of "60"-80"
 door lower by 55 mm (non-rebated system)
 door lower by 50 mm (rebated system)
 ventilation trim (p. 141)
 tempered transparent 4 mm thick glass



ESTATO LUX door, A01 version, SYSTEM DIN adjustable door frame

ESTATO LUX

- **solid construction – wooden rail and stile set**
- **stable solid chipboard in-fill**
- door covered with **natural veneers**
- **ecological UV varnish** ensures incredible permanence of colour and scratch resistance
- **vertical wood grain**
- **security, tempered** glass pane, white/brown matt, thickness: 6 mm or **VSG 44.2 laminated glass** in the colour of black, thickness: 8,5 mm



black pane



ESTATO LUX door, A01 version, SYSTEM DIN DUO adjustable door frame



WHITE/BROWN MAT TEMPERED GLASS

BLACK LAMINATED GLASS

VERSION	A01 / V1SA	A02 / V2SA	A03 / V3SA	A01 / V1SA black glass	A02 / V2SA black glass	A03 / V3SA black glass
---------	------------	------------	------------	------------------------	------------------------	------------------------



WHITE MATT LAMINATED GLASS














VERSION	A01 / V1SA	A02 / V2SA	A03 / V3SA
---------	------------	------------	------------

COLOURS

VENEERED GROUP A	311	312	334
	bright oak	swiss pine	European oak
	323	340	376
	rustic oak	ebony	steel oak
VENEERED GROUP B	390	404	405
	natural walnut	dark walnut	bright walnut
	421	422	424
	cappuccino	mocca	teak

DOOR FRAMES



<div>rebated SYSTEM</div> 	 <p>POL-SKONE system fixed frame</p>	 <p>DIN system adjustable frame</p>	 <p>POL-SKONE system adjustable frame</p>	 <p>fixed metal frame</p>	 <p>metal adjustable frame</p>	
<div>non-rebated SYSTEM</div> 	 <p>DUO fixed frame</p>	 <p>DIN DUO adjustable frame</p>	 <p>DUO adjustable frame</p>	 <p>VERTIGO adjustable frame</p>	 <p>fixed metal frame</p>	 <p>metal adjustable frame</p>

EQUIPMENT

STANDARD

white/brown matt tempered glass, thickness: 6 mm (versions A01-58 mm, A02-208 mm, A03-280 mm)*
laminated glass 44.2 in the colour of black or white matt, 8.5 mm thick
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)
hinges: type T – for the DIN system door frame or for the metal door frame, type C – for the wooden door frame ("60"- "80" – 2 pcs, "90" – 3 pcs) or the concealed DUO satin nickel for non-rebated system ("60"- "70" – 2 pcs, "80"- "90" – 3 pcs)

door closer is not available

ADDITIONAL (available at an extra charge)

size "100"

REVES system

third hinge in the door leaf:

type C for a width of "60"- "80"

type T for a width of "60"- "80"

concealed DUO type for a width of "60"- "70"

version A01, A02, A03 door lower by 50 mm (rebated system)

version A01, A02, A03 door lower by 55 mm (non-rebated system)

version A01, A02, A03 door higher by 100 mm (third hinge in the door leaf is required)

version A01, A02, A03 door higher by 200 mm (third hinge in the door leaf is required)

ventilation trim (not applicable to versions A02, A03) (p. 141)

ventilation trim A01 with the "60" - "100" widths (p. 141)

ventilation trim A02, A03 with the "70" - "100" widths (p. 141)

tempered 6 mm glass in the colour of graphite or transparent

sliding system (not applicable to the version A01)

p. 104-109

*+/- 1-2 mm tolerance

SLIDING system

ON-WALL MOVI



LEAF STRUCTURE

Non-rebated system door leaf. The door is made of a **wooden rail and stile set** topped with two plain HDF boards with the ECO TOP, LAMISTONE CPL and SILKSTONE surface, laminated, veneered and painted.
The standard in-fill is a honeycomb-like layer.
The rated door leaf thickness is 40 mm.

DOOR LEAF FINISH

Smooth painted, veneered, laminated surfaces or with ECO TOP, LAMISTONE CPL, SILKSTONE finishes.

ACCESSORIES

- Standard equipment:
- long brass pull handle chrome satin (U4)
- Auxiliary equipment:
- perforated chipboard in-fill
 - leaf lower by 50 mm
 - leaf higher by 50 mm
 - leaf higher by 100 mm
 - leaf higher by 150 mm
 - leaf higher by 200 mm



The tunnel system installation is not available for the MOVI sliding system.




Complete MOVI system price = MOVI leaf price
+ MOVI sliding system price

SLIDING ON-WALL MOVI SYSTEM

leaf width
"70" - "100"
"110"

LEAF FOR MOVI SLIDING SYSTEM


single leaf door	ECO TOP	UNI MAT PLUS	LAMISTONE CPL	laminated CPL 0,2 mm	PAINTED white, beige, grey	BLACK RAL 9005	VENEERED			ESPINA	
			SILKSTONE				GROUP A	GROUP B	GROUP C	GROUP A	GROUP B
"70" - "90"											
"100" - "110"											

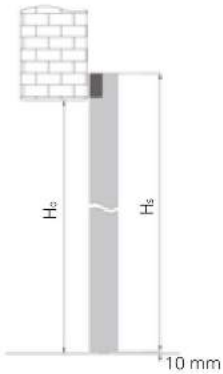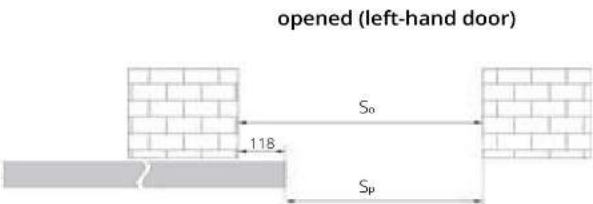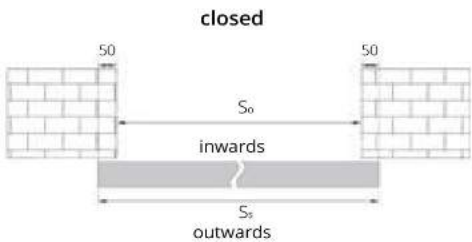

WIDTH			
size	S _s	S _o	S _p
"70"	744	644	526
"80"	844	744	626
"90"	944	844	726
"100"	1044	944	826
"110"	1144	1044	926

HEIGHT		
size	H _s	H _o
leaf lower by 50 mm	2040	1980
leaf standard	2090	2030
leaf higher by 50 mm	2140	2080
leaf higher by 100 mm	2190	2130
leaf higher by 150 mm	2240	2180
leaf higher by 200 mm	2290	2230

S_s - door leaf width
S_o - door frame installation hole width
S_p - clear opening width
H_o - installation hole height
H_s - door leaf height



for "100" door



for "60-90" door



LUMEN door, I version, LUMEN adjustable door frame

LUMEN

Fixed metal door frame (p. 120)
or adjustable metal door frame (p. 121)
for LUMEN glass panes

The door is constructed of a tempered glass pane suspended on the adjustable LUMEN door frame available with a full range of colours: ECO TOP, LAMISTONE CPL, SILKSTONE, laminated and veneered.




handle



hinge



LUMEN door, I version, LUMEN adjustable door frame



FOLDING



Door leaf constructed of a **wooden rail and stile set** topped with two plain laminated, veneered HDF boards. The standard in-fill is a honeycomb-like layer.



FOLDING door, 00 version, SYSTEM DIN DUO adjustable door frame

pull handle



FOLDING door, 00 version, DIN DUO adjustable door frame



SOUNDPROOF



SOUNDPROOF door, 00 version, SYSTEM DIN adjustable door frame

Single leaf **SOUNDPROOF** door in the rebated system. The leaf structure consists of a **rail and stile set made of coniferous wood**, topped with HDF boards on both sides. The in-fill is made of solid chipboard (type A) or the special structure (type B). Leaf with a drop down seal.

acoustic insulation:

with a wooden door frame:

class Rw=27 dB (type A); class Rw=32 dB (type B)

with a metal door frame:

class Rw=27 dB (type A); class Rw=37 dB (type B)

with the DIN adjustable door frame:

class Rw=27 dB (type A); class Rw=37 dB (type B)

ITB technical approval: ITB-KOT-2021/2041

Single or double leaf **SOUNDPROOF DUO** non-rebated door. The leaf structure consists of a **rail and stile set made of coniferous wood**, topped with HDF boards on both sides. The in-fill is made of solid chipboard (type A) or the special structure (type B).

The door is available in the single and double leaf version with a wooden frame (DUO fixed or DUO adjustable). Leaf with a drop down seal.

acoustic insulation:

single and double leaf door type A - **class Rw=27 dB**

single leaf type B - **class Rw=37 dB**

double leaf type B - **class Rw=32 dB**

mechanical class: mechanical resistance requirements class 2, i.e. average service conditions

ITB technical approval: ITB-KOT-2021/2041




handle, lock



standard interconnection of architraves at the 45° angle



SOUNDPROOF door, 00 version, SYSTEM DIN adjustable door frame



CERBER PLUS door, 00 version, fixed wooden door frame

CERBER PLUS

Door with a wooden or metal frame. Door **leaf constructed of a wooden rail and stile set** topped with two HDF boards. The in-fill is made of perforated board, optionally solid board or special structure (37dB version). Rated leaf thickness: 46 mm.

acoustic insulation:

CERBER PLUS:

class D1 – 25, D2 – 25, **class Rw=27 dB**

CERBER PLUS 37 dB:

class D1 – 35, D2 – 30, **class Rw=37 dB**

(door with a wooden threshold),

class D1 – 30, D2 – 30, **class Rw=37 dB**

(door with a drop down seal)

mechanical class 3 according to PN-EN 1192:2001

ITB technical approval: **ITB-KOT-2019/0742 edition 1**




handle + upper lock



upper rosette




oak threshold

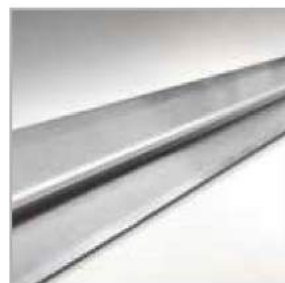

stainless steel threshold



CERBER PLUS door, 00 version, fixed wooden door frame

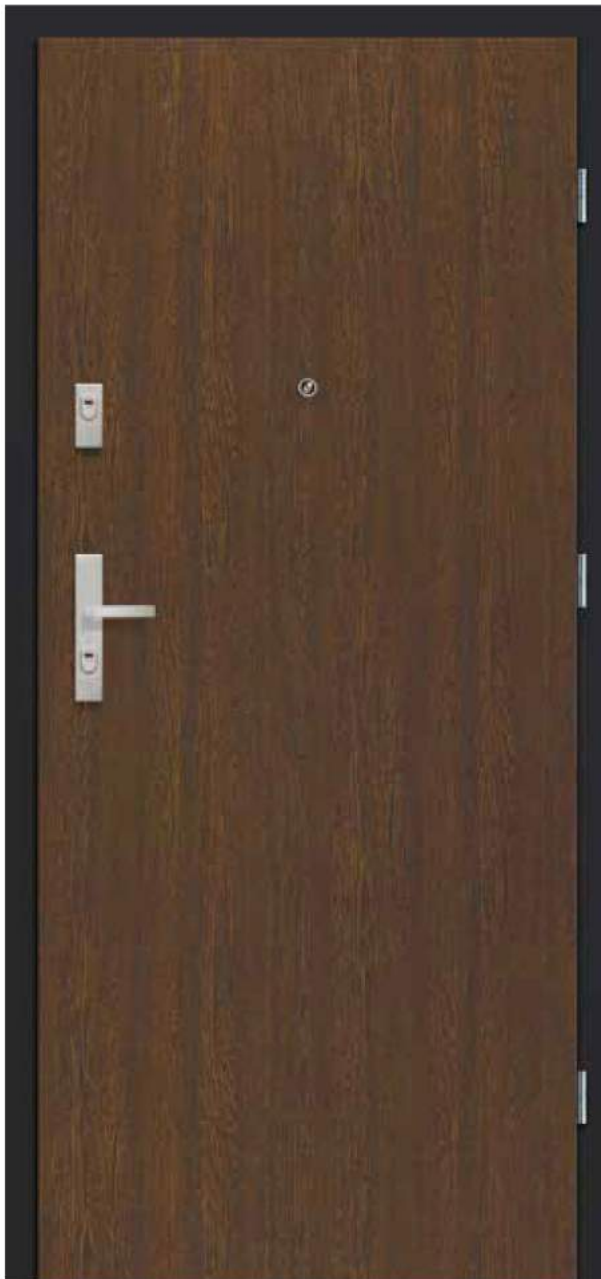

CERBER PLUS RC2 door, 00 version, RAL 9005 fixed metal door frame

CERBER PLUS RC2

Interior entrance door leading from corridors or staircases to e.g. flats in multi-family buildings or rooms in public utility buildings.

Door with a fixed and adjustable wooden door frame or metal door frame. Door leaf constructed of a **wooden rail and stile set** topped with two HDF boards. The in-fill is made of perforated board, optionally solid board or special structure (37dB version).
Rated leaf thickness: 46 mm.

acoustic insulation:

class D1 – 25, D2 – 25, **class Rw=27 dB** (perforated or solid chipboard in-fill, door with wooden threshold or with drip seal)

class D1 – 30, D2 – 30, **class Rw=37 dB** (POL-SKONE chipboard in-fill, door with drop seal)

class D1 – 35, D2 – 30, **class Rw=37 dB** (POL-SKONE chipboard in-fill, door with wooden threshold)

burglary resistance: **class RC2** PN-EN 1627:2012

mechanical **class 3** PN-EN 1192:2001

ITB technical approval: **ITB-KOT-2019/0742 edition 1**



strip type lock



strip type lock



CERBER PLUS RC2 door, 00 version, one-sidedly adjustable wooden door frame



B-30 door, W0 version, fixed wooden door frame

B-30/C-30

Interior entrance door leading from corridors or staircases to e.g. flats in multi-family buildings or rooms in public utility buildings. Door leaf constructed of a **wooden rail and stile set** topped with two HDF boards. The in-fill is a special structure. The leaf thickness is 56 mm.

burglary resistance
 POL-SKONE B-30 – **class RC3** according to PN-EN 1627:2012
 POL-SKONE C-30 – **class RC3** according to PN-EN 1627:2012
 – **class C** according to PN-B-92270:1990
 smoke control: **class Sa, S₂₀₀**
 fire resistance: **class EI₂30**
 acoustic insulation: **D1-35, D2-35, Rw=37 dB**
4 mechanical class according to PN-EN 1192:2001
 ITB technical approval: **ITB-KOT-2018/0713 edition 1**



handle



upper rosette




hinge



levering protection bolts



B-30 door, W0 version, fixed wooden door frame



RC3 door, W0 version, fixed wooden door frame

RC3

Interior entrance door leading from corridors or staircases to e.g. flats in multi-family buildings or rooms in public utility buildings. Door leaf constructed of a **wooden rail and stile set** topped with two HDF boards. The in-fill is a special structure. Leaf thickness: 50 mm.

burglary resistance: **class RC3** according to PN-EN 1627:2012
acoustic insulation: **D1-30, D2-30, Rw=32 dB**
4 mechanical class according to PN-EN 1192:2001
ITB technical approval: **ITB-KOT-2018/0713 edition 1**



handle



upper rosette



hinge



oak threshold



RC3 door, W0 version, fixed wooden door frame



RC3 INVEST

Interior entrance door leading from corridors or staircases to e.g. flats in multi-family buildings or rooms in public utility buildings. Door leaf constructed of a **wooden rail and stile set** topped with two HDF boards. The in-fill is a special structure. Leaf thickness: 50 mm.

burglary resistance: **class RC3** according to PN-EN 1627:2012
 acoustic insulation: **D1-30, D2-30, Rw=32 dB**
4 mechanical class according to PN-EN 1192:2001
 ITB technical approval: **ITB-KOT-2018/0713 edition 1**



handle



upper rosette



hinge




metal door frame



RC3 INVEST door, W0 version, fixed metal door frame



RC3 INVEST door, W0 version, fixed metal door frame



RC4 door, 00 version, fixed metal door frame

RC4

Interior entrance door are designed as closures for interior passages between a staircase or a corridor and rooms. Opened inwards and outwards.

Special structure based on a **solid wood rail and stile set** reinforced with plywood. The in-fill is a set of chipboards reinforced with steel bars. Door leaf thickness 50 mm. Fixed metal door frame made of 1.5 mm thick DC01 sheet metal, stainless steel 1.5 mm thick threshold.

burglary resistance: **class RC4** according to PN-EN 1627:2012, **class C** according to PN-B-92270:1990
acoustic insulation: **Rw= 37 dB, D₁-35, D₂-30**
mechanical strength: **classc 4** according to PN-EN 1192:2001
mechanical durability: **class 5** according to PN-EN 12400:2004



strip type lock



strip type lock



object hinge




levering protection bolts



RC4 door, 00 version, fixed metal door frame





RC4 EI30 door, 00 version, fixed metal door frame

RC4 EI30

Interior entrance door are designed as closures for interior passages between a staircase or a corridor and rooms. Opened inwards and outwards.

Special structure based on a solid **wood rail and stile set** reinforced with plywood. The in-fill is a set of chipboards reinforced with steel bars. Door leaf thickness 50 mm. Fixed metal door frame made of 1.5 mm thick DC01 sheet metal, stainless steel 1.5 mm thick threshold.

Burglary resistance: **class RC4** according to PN-EN 1627:2012
class C according to PN-B-92270:1990

Fire insulation: – **class EI₃₀**

Acoustic insulation: **Rw= 37 dB, D₁-35, D₂-30**

Mechanical strength: **class 4** according to PN-EN 1192:2001

Mechanical durability: **class 5** according to PN-EN 16034:2014



strip type lock



strip type lock




object hinge



levering protection bolts



RC4 EI30 door, 00 version, fixed metal door frame



PRESTIGE door, 00 version

PRESTIGE

NEW

burglary resistance class RC2

Single-leaf door with side screens

Doors in rebated system with fanlight in one frame.

Door leaf constructed of a pine wood rail and stile set reinforced with a steel profile, topped with two wood-like boards covered with natural oak veneer. Surface of boards painted with covering or transparent paints. In-fill made of thermal insulation layer. Leaf thickness: 80 mm. Oak door frame.

Single leaf door

Door in the rebated system. Door leaf constructed of a pine wood rail and stile set reinforced with a steel profile, topped with two wood-like boards covered with natural oak veneer. Surface of boards painted with covering or transparent paints. In-fill made of thermal insulation layer. Leaf thickness: 80 mm. Oak door frame.

- **multi-point automatic** lock with day/night function
- **modern** design
- PROTOR paint system - **15 year warranty**
- burglary resistance **class RC2**
- **integrated** fanlight in one frame
- **reinforced** rail and stile set

$U_d = 0,83^*$
W/m²K

HEAT
TRANSFER
COEFFICIENT

*detailed test results are available at www.pol-skone.eu



PRESTIGE door, 02 version



VERSION	00 / V00	02 / V1
---------	----------	---------

COLOURS

COVERING PAINTS	003 white (RAL 9016)	008 anthracite (RAL 7016)
	57961 natural oak	
TRANSPARENT PAINTS		

EQUIPMENT

STANDARD
oak door frame 100x70 mm, black colour
transparent 9005
black oak threshold with a protective aluminum profile
levering protection system
double weather strip system (around the door leaf and the door frame perimeter)
three-pane burglar-proof glass packet with Chromatech Ultra warm frame in the fanlight, in standard the choice of transparent or coloured glass in grey, brown or green. Coefficient Ug=0,5 W/m2K according to EN 674.
screw-in hinges adjustable in three planes in the colour of silver - 4 pcs, hinge caps in the colour of black
MACO multi-point strip lock (2 bolts, 2 hooks, master cylinder), automatic locking without a key. Lock with day/night function, day function which can be activated by moving the sliders on the lock strips and allows keyless opening of the door from the outside.
class 6 cylinder: 55G/50, black colour
pull handle on the outside, handle on the inside - set in black
doors opened outwards

WIDTH			
single leaf door			
type	S _o	S _d	S _w
"80"	1000	971	801
"90"	1100	1071	901
"100"	1200	1171	1001
HEIGHT			
	H _o	H _d	H _w
	2120	2105	2000


WIDTH			
single-leaf door with side screens			
type	S _o	S _d	S _w
"150"	1500	1470	901
"160"	1600	1570	901
"170"	1700	1670	901
HEIGHT			
	H _o	H _d	H _w
	2120	2105	2000

So, Ho - recommended installation dimension

Sd, Hd - door with sidelight width/height

Sw, Hw - clear opening width/height

ADDITIONAL (available at an extra charge)	
concealed door closer	
glass: Mirastar („Venetian mirror”), reflective glass	individual
STOPSOL (grey, brown, green colour), mat glass	cost
	calculation
SPECIFICATIONS	
heat transfer coefficient: Ud=0.88 W/m2K for door with sidelight, with a width of "150", according to PN-EN 14351-1+A2:2016-10	
heat transfer coefficient: Ud=0.83 W/m2K for door with a width of "90", according to PN-EN 14351-1+A2:2016-10	
burglary resistance class EN 1627 RC2	



ARGALI door, W01 version

ARGALI

burglary resistance class RC2

Door in the rebated system. Door leaf constructed of a **pine wood rail and stile set reinforced** with a steel profile, topped with two wood-like boards covered with natural oak veneer. Surface of boards painted with covering or transparent paints. In-fill made of thermal insulation layer. INOX stainless steel application on the external surface of the leaf. Leaf thickness: 81 mm.



handle, metal sheet cross rail



upper rosette

$U_d = 0.78^*$
W/m²K

HEAT
TRANSFER
COEFFICIENT




hinge

*detailed test results are available at www.pol-skone.eu



ARGALI door, W02 version

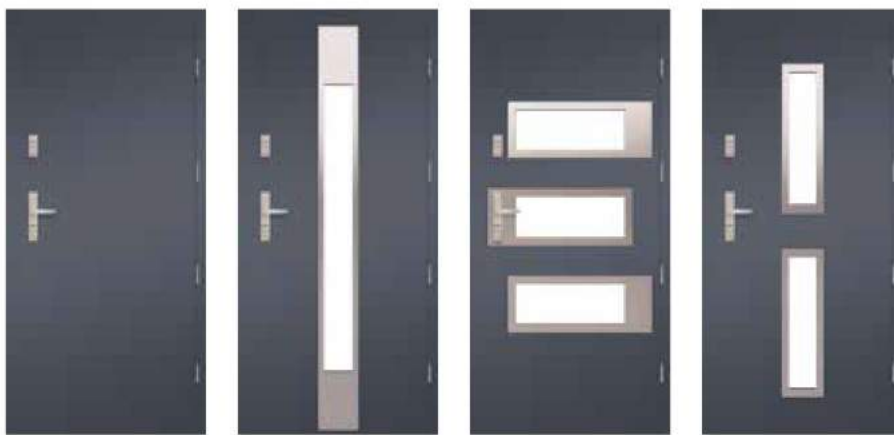

VERSION

W00

W01

W02

W03



WIDTH

single leaf door

type	S_o	S_d	S_w
"80"	1000	971	801
"90"	1100	1071	901
"100"	1200	1171	1001

HEIGHT

H_o	H_d	H_w
2120	2105	2000

S_o , H_o - recommended installation dimension

S_d , H_d - door width/height

S_w , H_w - clear opening width/height

INOX stainless steel application in black

version
W01
W02 width "80"
W02 width "90"
W02 width "100"
W03

COLOURS

COVERING PAINTS	003	004	007	008
	white (RAL 9016)	brown (NCS s8010-Y90R)	grey (RAL 7047)	anthracite (RAL 7016)

TRANSPARENT PAINTS	dyes on oak
--------------------	-------------

OPTIONAL COLOURS

COVERING PAINTS	 RAL and NCS colours (except the metallic ones)
-----------------	--

EQUIPMENT

STANDARD

door frame: 100x70 mm (pine door frame:
covering paints; oak door frame: transparent paints)
oak threshold with aluminium profile
levering protection system
double weather strip system (around the door leaf and the door frame
perimeter)
anti-burglar triple glazing unit with the Chromatech Ultra spacer frame
screw-in hinges adjustable in three planes - 4 pcs
FUHR four-point two-cylinder handle-activated strip lock (2 bolts and
2 hooks), locked by raising of the handle, upper cylinder independent,
spacing: 92 mm
doors opened outwards

ADDITIONAL (available at an extra charge)

hinge caps - 1 set (2 pcs per one hinge)
class 6 cylinder: 55G/50 (complete set - 2 pcs including with one knob)
GARDA handle, spacing 92 mm p. 162
INOX stainless steel application in black
glazing unit with glass: Mirastar (Venetian mirror), tinted, individual
reflective or ornamental glass cost
calculation

SPECIFICATIONS

heat transfer coefficient: $U_d=0.78$ W/m²K for W00 pine door with
a width of "90", according to PN-EN 14351-1+A1:2010
heat transfer coefficient in a class P4 anti-burglar glazing unit
with a transparent glass pane $U_g=0.5$ W/m²K according to EN 674
burglary resistance class EN 1627 RC2

To ensure that the door meets anti-burglar specifications, door handles should comply with min. class 2 anti-burglar resistance rating in
accordance with the PN-EN 1906:2012 standard whereas door lock cylinders should comply with min. class 4 key-related resistance rating
and min. class 1 attack resistance rating according to the PN-EN 1303:2007+AC:2008 standard.



NEW

MODO
VERI
EGRO



MODO




VERI



EGRO





SATURN door, 03S1 version

SATURN

burglary resistance class RC2

Rebated system door constructed of a **pine wood rail and stile set reinforced** with a steel profile (with an oak strip on the hinge side), topped with two wood-like boards covered with natural oak veneer. Surface of leaves painted with covering or transparent paints. In-fill made of thermal insulation layer. INOX stainless steel application on the external side of the leaf surface (versions: L1). Leaf thickness: 61 mm.



handle



upper rosette



sheet metal - panel

*detailed test results are available at www.pol-skone.eu



SATURN door, L1 version



VERSION 00 02 03 03S1



VERSION 04S1 04S2 04S3 04S5 L1

DOOR FRAME WIDENING COVERS FOR THE SATURN DOOR



10 mm x 100 mm	20 mm x 100 mm	30 mm x 100 mm
pine		
oak		

Single leaf doors with door frame widening covers

WIDTH					
Type	S _w	S _d	S _n	S _o	H _o
"80"	811	931	10	980	2110
			20	1000	2120
			30	1020	2130
"90"	911	1031	10	1080	2110
			20	1100	2120
			30	1120	2130
"100"	1011	1131	10	1180	2110
			20	1200	2120
			30	1220	2130
HEIGHT:				H _d	H _w
				2081	2000

S_w, H_w - clear opening width / height, S_d, H_d - door width/height
S_n - widening covers width, S_o, H_o - recommended installation dimension


COLOURS

COVERING PAINTS	003	004	007	008
	white (RAL 9016)	brown (NCS s8010-Y90R)	grey (RAL 7047)	anthracite (RAL 7016)

TRANSPARENT PAINTS	dyes on oak
--------------------	-------------

OPTIONAL COLOURS

COVERING PAINTS	 RAL and NCS colours (except the metallic ones)
-----------------	--

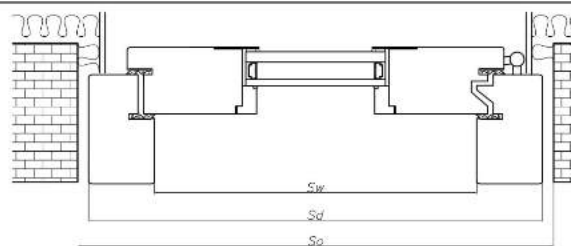

WIDTH			
single leaf door			
type	S _o	S _d	S _w
"80"	960	931	811
"90"	1060	1031	911
"100"	1160	1131	1011
HEIGHT		H _d	H _w
		2100	2000

EQUIPMENT


STANDARD
oak threshold with aluminium profile
door frame: 100x60 mm; oak door frame: transparent or covering paints
levering protection system
double weather strip system (around the door leaf and the door frame perimeter)
glazing unit: P4 anti-burglar glass pane with the Chromatech Ultra spacer frame
screw-in hinges adjustable in three planes - 4 pcs
FUHR four-point two-cylinder handle-activated strip lock (2 bolts and 2 hooks), locked by raising of the handle, independent upper cylinder, spacing: 92 mm
doors opened outwards

ADDITIONAL (available at an extra charge)
hinge caps - 1 set (2 pcs per one hinge)
class 6 cylinder: 35G/50 (complete set - 2 units including with one knob)
GARDA handle, spacing 92 mm
INOX stainless steel application in black (L1)

glazing unit with glass: Mirastar (Venetian mirror), tinted, reflective or ornamental glass	individual cost calculation
---	-----------------------------

SPECIFICATIONS
heat transfer coefficient: U _d =1.1 W/m ² K for the 00 version "90" width door according to PN-EN 14351-1+A1:2010
heat transfer coefficient in a class P4 anti-burglar glazing unit with a transparent glass pane U _g =1.0 W/m ² K according to EN 674
burglary resistance class EN 1627 RC2

To ensure that the door meets anti-burglar specifications, door handles should comply with min. class 2 anti-burglar resistance rating in accordance with the PN-EN 1906:2012 standard whereas door lock cylinders should comply with min. class 4 key-related resistance rating and min. class 1 attack resistance rating according to the PN-EN 1303:2007+AC:2008 standard.

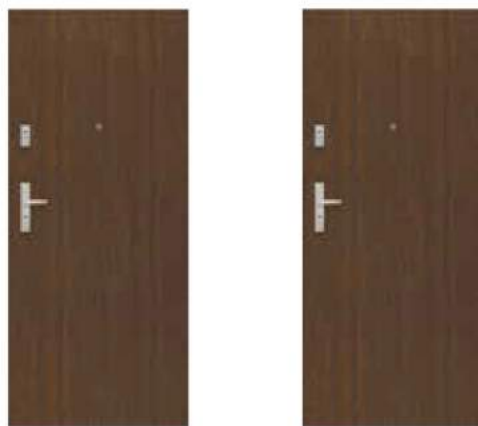


VERSION 00 version 37 dB 00

CERBER ALU available with the colours of LAMISTONE, SILKSTONE, veneered (available in other colours and with flush board in-fill for enquiries related to development projects). See exemplary versions below:



version W1 / VD1 version W2 / VD2 version W3 / VD3

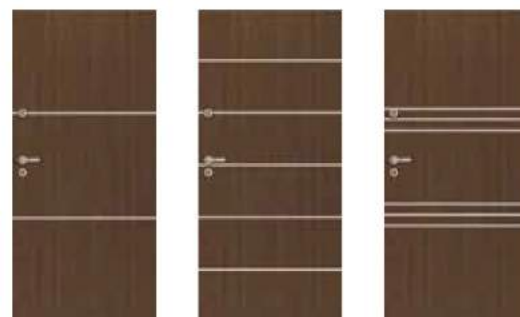

version W4 / VD4 version W5 / VD5 version W6 / VD6

COLOURS



*available at an extra charge upon consultation with the Sales Department

DOOR FRAMES



CERBER PLUS fixed metal frame

FIXED AND ADJUSTABLE WOODEN DOOR FRAME

WIDTH

type	S ₀	S _d	S _s	S _{op1}	S _{op2}
"855"	875	855	778	948	958
"80"	915	895	818	988	998
"90"	1015	995	918	1088	1098
"90 Plus"*	1025	1005	928	1178	1188
"100"	1115	1095	1018	1188	1198

HEIGHT	H _d	H _s	H _o	H _{op1}	H _{op2}
	2067	2020	2080	2114	2119

FIXED METAL DOOR FRAME

WIDTH

type	S ₀	S _d	S _s	S _c
"80"	881	871	818	917
"90"	981	971	918	1017
"90 Plus"*	991	981	928	1027
"100"	1081	1071	1018	1117

HEIGHT	H _d	H _s	H _o	H _c
	2055	2020	2060	2078

* width 90 plus allowing to get the clear opening of min. 900 mm when the door leaf is opened at an angle of 90°

EQUIPMENT

STANDARD

wooden door frame: white (RAL 9003) and graphite (RAL 7024) colour painted, veneered or covered with foil or the CPL 0.15 mm laminate matching the door leaf colour

fixed metal door frame made of sheet metal from a thickness of 1.5 mm, powder-painted in the colour of white (RAL 9016), white (RAL 9003), grey (RAL 7047), graphite (RAL 7024), brown (RAL 8014) or beige (RAL 1001)

adjustable screwed-in pivot hinges "80"- "100" - 3 pcs

independent levering protection bolts - 2 pcs

three-point mortise locks for a cylinder (cylinders not included) - 2 pcs, handle spacing 72 mm

oaken threshold with a height of 20 mm

silver peephole Ø15

DIMENSIONS

standard:

door with a wooden door frame: 895x2067 mm, 995x2067 mm, 855x2067 mm

door with a metal door frame: 917x2078 mm, 1017x2078 mm

"90 Plus" version (allowing to get the clear opening of min. 900 mm when the door leaf is opened at an angle of 90°):

door with a wooden door frame: 1005x2067 mm

door with a metal door frame: 1027x2078 mm

the design allows the door to be shortened by max. 50 mm (not applicable to the metal door frame)

ADDITIONAL (available at an extra charge)

SILKSTONE CPL surface

size "100"

adjustable wooden door frame with widening panels, angular architraves and masking strip

p. 163

painted metal door frame available in the colours of the RAL and NCS palettes

upon consultation with the Sales Department

drop seal (without a threshold)

hinges with the closing function - only the wooden door frame

solid chipboard in-fill

door with (H_d) a height of 1950, 2000 mm (applicable to the wooden door frame)

hinge caps:

white/brown
chrome/nickel matt
golden matt

panoramic peephole

change of oak threshold to stainless steel threshold (applicable to the metal door frame)

change the colour of standard oaken threshold to the colour of black, grey, brown colour

GARDA handle in the colour of black and INOX

GARDA upper rosette in the colour of black and INOX

WILKA cylinder in the colour of black

leaf edge in the colour of black, grey or graphite

COLOURS OF INTERIOR DOOR LEAVES

ECO TOP

A surface that provides the perfect combination of price and quality for long term household use.

HIGH TOP

ECO TOP surface finish with additional real wood grain effect.

UNI MAT PLUS

Reinforced surface with silky tactile experience and special fingerprint-proof coating.

LAMISTONE CPL

Surface finish with protective coating for resistance to wear and chemicals. Recommended for public utility buildings and applicable to intensive door use conditions, e.g. in hotels and offices.

SILKSTONE

LAMISTONE CPL surface finish with additional unique real wood grain effect.

SILKSTONE CPL 0,5 mm

Surface finish featuring the properties and resistance of the CPL 0.5 laminate with additional unique real wood grain effect. Recommended for public utility buildings and applicable to intensive door use conditions, e.g. in hotels and offices.

LAMINATED

Highly resistant surface finish recommended for public utility buildings and applicable to intensive door use conditions, e.g. in hotels and offices. Differences in colour shades of door leaves, door frames and spacer frames are acceptable.


VENEERED

The POL-SKONE veneered doors are coated with environment-friendly UV varnish. It is certainly more resistant to scratches and light than standard varnishes, including those laid in multiple layers. The actual colour shades and wood grain of veneers may vary since natural veneers are used.

PAINTED

Environment-friendly acrylic paints, RAL and NCS colours* (except the metallic ones) – available at an extra charge according to the colour specification table for particular models.

ECO TOP



120 white



121 oak



132 walnut



135 English oak



141 Salinas oak



158 honey oak



159 delano oak



160 sonoma oak



161 halif oak

HIGH TOP



148 coffee ash


UNI MAT PLUS



640 graphite



641 titano



642 white



643 beige



644 black



645 lava



646 stone



647 indigo



648 moss

* available upon consultation with the Sales Department

The actual colours may vary from the colours printed in the catalogue. Differences in colour shades of door leaves, door frames and spacer frames are acceptable.

LAMISTONE
CPL

231 halif oak

240 whitewashed elm V

241 sand elm V

242 grey elm V

243 delano oak

244 black

247 industry 1

248 industry 2

250 terra oak

258 white

260 white oak

263 premium walnut

265 wenge

268 sand elm H

269 grey elm H

289 grey

531 anthracite

NEW

232 segato walnut

SILKSTONE

230 gran oak

254 Royal anthracite H

255 Polish ash H

276 Polish oak

293 Royal anthracite

294 Royal ash

295 Royal merbau

296 Polish ash

297 Royal nougat

299 Royal ash H

SILKSTONE
CPL 0,5 mm*

976 Polish oak

993 Royal anthracite

994 Royal ash

995 Royal merbau

996 Polish ash

997 Royal nougat

* available upon consultation with the Sales Department
 The actual colours may vary from the colours printed in the catalogue. Differences in colour shades of door leaves, door frames and spacer frames are acceptable.

LAMINATED
CPL 0,2 mm

820 white

222 grey

223 cherry

225 terra oak

227 delano oak

229 oak

280 halif oak

821 anthracite

844 black

847 industry 1

848 industry 2

849 industry 3**

863 premium walnut

NEW
228 segato walnut

LAMINATED
CPL 0,5 mm*

945 white structure

252 oak

922 grey structure

926 anthracite structure

965 wenge

923 cherry

963 premium walnut

947 industry 1

948 industry 2

825 terra oak

946 black structure

961 halif oak

LAMINATED
CPL 0,7 mm*

745 white structure

722 grey structure

779 oak

726 anthracite structure

765 wenge

723 cherry

763 premium walnut

747 industry 1

748 industry 2

725 terra oak

746 black structure

761 halif oak

LAMINATED
HPL*

HPL colours apply to:
HARMONY INVEST,
DECO, FOLDING DOOR,
SOUNDPROOF DOOR, CERBER
PLUS, CERBER PLUS RC2, B-30,
C-30, RC3, RC3 INVEST, RC4,
RC4E|30.

VENEERED
GROUP A



311 bright oak



312 swiss pine



334 European oak

VENEERED
GROUP B



323 rustic oak



340 ebony



351 marrone



376 steel oak



390 natural walnut



404 dark walnut



405 bright walnut



421 cappuccino



422 mocca



424 teak

VENEERED
GROUP C



370 white-stained oak



450 white matt



451 black matt


VENEERED
GROUP D



460 makassar

trends for
2022

PAINTED



001 white (RAL 9003)



0M6 beige matt
(NCS s2005 Y50R)



0M5 grey matt
(RAL 7047)



RAL and NCS colours*

BLACK



002 black (RAL 9005)

*NCS colours – upon consultation with the Sales Department

Colour samples and colour charts available on the market should be treated as illustrative. They may differ slightly from the final colour and shall not constitute grounds for complaint, unless the colour/painting has been approved in advance in consultation with the manufacturer. In order to verify the actual colour, a test painting must be ordered.

RAL PALETTE – division of colours according to the colour intensity grade (not applicable to the metal door frame). RALcolour palette for metal door frames – p. 10

GROUP I extra charge acc. to the extra charge table

6020 7002 7042 8000 9002

GROUP II extra charge acc. to the extra charge table

1000 1001 1002 1012 1013 1014 1015 1020 3011 3016 4002 4006 5001 5002 5005 5007 5008 5009 5010 5012 5013 5015 5017 5019 5022 5024 6000 6001 6004 6005 6007 6009 6012 6013 6014 6015 6016 6021 6022 6024 6026 6028 6029 6032 6034 7000 7001 7003 7004 7005 7006 7008 7009 7010 7011 7012 7013 7015 7016 7021 7022 7023 7024 7026 7030 7031 7032 7033 7034 7035 7036 7037 7038 7039 7040 7043 7044 7045 7046 7047 8001 8003 8007 8008 8011 8014 8015 8016 8017 8019 8022 8023 8025 8027 8028 9001 9010 9016 9018

GROUP III extra charge acc. to the extra charge table

1011 1021 1027 1037 2011 3009 3012 3013 3014 3015 4010 5003 5004 5011 5014 5018 5021 6002 6006 6008 6010 6017 6018 6025 6027 6033 8002 8004 8012

GROUP IV extra charge acc. to the extra charge table

1007 1016 1018 1032 2000 2004 3000 3002 3017 3018 3027 4001 4004 4005 4007 4008 4009 5000 5023 6023 6011 6019 6031 8024

GROUP V extra charge acc. to the extra charge table

1003 1004 1005 1006 1017 1019 1023 1024 1028 1033 1034 2001 2002 2003 2008 2009 2010 2012 3001 3020 3028 3031 6037

The actual colours may vary from the colours printed in the catalogue. Differences in colour shades of door leaves, door frames and spacer frames are acceptable.

METAL DOOR FRAMES

COLOUR PALETTE

Standard colours available in 3 types of surface finish:
SEMI-MATT (standard), MATT, SEMI-GLOSS (after consultation with the Sales Department).

Automatic application of powder paint guarantees a uniform paint surface.

STANDARD COLOURS



RAL COLOUR SURCHARGE TABLE FOR DOOR METAL FRAMES

Colour group
GROUP I
GROUP II
GROUP III
GROUP IV
GROUP V



SURCHARGE TABLE - STRUCTURES
Extra charge to the basic price of the metal frame
rebated system
non-rebated system
HARMONY in colour RAL 9003, RAL 9005

RAL COLOUR PALETTE (applies to metal door frames)

GROUP I																																
1000	1002	1011	1013	1015	1019	1020	3009	4001	5000	5001	5004	5005	5007	5008	5009	5010	5011	5013	5014	5017	5019	5020	5021	5022	5023	5024	6000	6003	6004			
6005	6006	6007	6008	6011	6012	6013	6014	6015	6019	6020	6026	6027	6033	6034	7000	7001	7002	7003	7004	7005	7006	7008	7009	7010	7011	7012	7013	7015	7016			
7021	7022	7023	7026	7030	7031	7032	7033	7034	7035	7036	7037	7038	7039	7040	7042	7043	7044	7045	7046	8000	8001	8002	8003	8004	8007	8011	8012	8015	8017			
8019	8022	8023	8025	8028	9001	9002	9010	1024HR 6021HR 9004HR 9005HR																								
GROUP II																																
1014	3000	3001	3002	3004	3007	3011	3013	3016	4002	4008	5002	5003	5012	5015	5018	6017	6022	6025	6029	9018	3031HR	4005HR	4006HR	6002HR	8008HR							
GROUP III																																
3003	3005	3020	3022	6010	6018	6024	1024HR 4004HR 4010HR 6032HR																									
GROUP IV																																
3012	3014	6001	6028	3027HR 4003HR 4007HR 6037HR																												
GROUP V																																
1003	1004	1005	1006	1016	1017	1018	1021	1023	1027	1032	1033	1034	1037	2000	2001	2002	2004	2009	2010	2011	2012	3018	9006	1027HR	1028HR	2003HR	2008HR	3028HR				

COLOURS

OAKEN THRESHOLDS

applicable to models CERBER PLUS, CERBER PLUS RC2, B-30, C-30, RC3 and RC4



varnished oaken threshold,
silver-coloured ALU strip
(standard)



varnished grey-coloured oaken
threshold, **silver-coloured ALU**
strip (optional)



varnished brown-coloured oaken
threshold, **black-coloured ALU strip**
(optional)



varnished black-coloured oaken
threshold, **black-coloured ALU**
strip (optional)

VENTILATION OPTIONS

PANEL WITH VENTILATION SURFACE



extra charge "70"
extra charge "80"
extra charge "90", "90 PLUS"
extra charge "100"
extra charge "110"

VENTILATION TUBES*

made of plastic



white



brown



black



beige



grey



anthracite

made of stainless steel



H17 clip fastening
acid resistant, clip fastening

Stainless steel grills and panels are optionally available on request.
The area of air inflow holes is more than 0.022 m².

* According to the Ordinance of the Minister of Infrastructure of 12 April 2002 on the technical conditions which must be fulfilled by buildings and their location. (Journal of Laws, 75 of 2002, item 690 as amended, Journal of Laws no 33 of 2003, item 270, Journal of Laws no 109 of 2004, item 1156), Chapter 6, §. 79. "A bathroom, washroom and separate toilet door should be openable outwards and have, subject to § 75 section 2, at least 0.8 m and a height of 2 m within the clear opening of the door frame and - in the lower part - air inlet holes with a total cross-section area not smaller than 0.022 m²".

STAINLESS STEEL 0.6 MM THICK PROTECTORS of leaf and door frame edges

The vertical leaf edge protectors can be used for the 40 mm thick leaf in the LAMISTONE, SILKSTONE, CPL 0.2, CPL 0.5, CPL 0.7 and VENEERED coating. The protectors are suitable only for hinges type T.

TYPE OF PROTECTOR

(vertical protector of the lock side and a vertical protector of the hinge side)


Complete set of the 40 mm thick leaf protectors

In case of swing doors, the leaf edge protector is installed on the side opposite to the hinge side.



ACCESSORIES

HINGES FOR INTERIOR DOORS

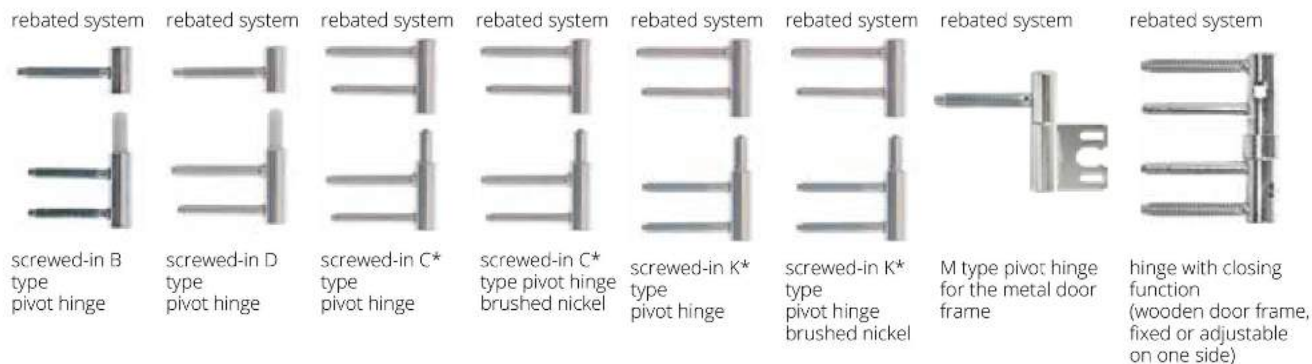

*hinges and door frame is a set. If you order to leaf door only, should order hinges.



LOCKS



HINGE CAPS, Type I (a set of 2 pcs per one hinge)



colours:
golden, golden-satin,
chrome, chrome-matt,
patina, black
Type I caps are used for
the C type and K type hinges.
A single set of hinge caps
consists of two identical caps.

HINGE CAPS, Type II (1 set per one hinge)

1 set - 2 pcs



colours:
white, brown, golden, golden-satin, chrome,
chrome-matt, patina, black

Type II caps are used for the B type and D type hinges.
A set of caps per one hinge consists of a short cap
(the upper part) and a long cap (the lower part).

ACCESSORIES

AUTOMATIC DOOR CLOSER GEZE TS 2000



closer
colours: silver, white, brown, black

Required reinforcement for automatic door closer and reinforcement under the door frame architrave. Other models of automatic door closers are available upon consultation with the Sales Department.



drop seal

Suitable only for a leaf with a min. thickness of 40 mm (lower rail and stile set).

HOOK LOCK for sliding doors



WK lock option
chrome, chrome-matt, golden, golden-matt, patina
black




WC lock option
chrome, chrome-matt, golden, golden-matt, patina
black

PULL HANDLES for sliding doors



U1 golden
U2 golden - matt
U3 chrome
U4 chrome - matt
U5 patina
U6 black

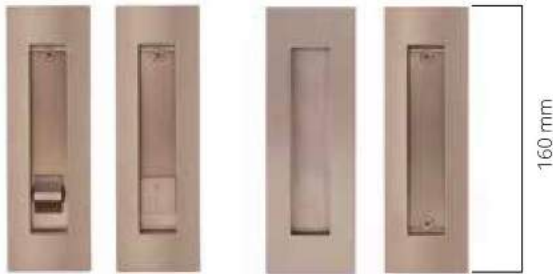

satin nickel
Pull handle ENTERO
Pull handle
Pull handle WC



satin nickel

Pull handle MAYA
(26.5 x 26.5 cylinder - extra charge)
Pull handle
Pull handle WK, WB
Pull handle WC

WK – key-operated, WB – cylinder type,
WC – bathroom privacy lock type

PULL HANDLES for folding doors (included in the door leaf price as a standard)

made of plastic



01 white
02 beige
03 brown
04 grey

ALUMINIUM DECORS (TIARA, SONATA)



chrome matt (standard)



golden gloss (option)



black (option)



chrome gloss (option)

HANDLES FOR INTERIOR DOORS

ARCO



split plate

colour	brushed nickel, antique brass
handle	
rosette WK, WB	
rosette WC	

ARCUS



split plate

colour	nickel satin, brushed nickel
handle	
rosette WK	
rosette WC	

LATINO



split plate

colour	stainless steel
handle + rosette WK	
handle + rosette WB	
handle + rosette WC	

MENSA



split plate

colour	chrome, satin chrome
handle	
rosette WK, WB	
rosette WC	

ENCKE



split plate

colour	nickel satin, brushed nickel
handle	
rosette WK, WB	
rosette WC	

PASSO



split plate

colour	nickel-matt, chrome matt
handle	
rosette WK, WB	
rosette WC	

VERSA



split plate

colour	satin chrome, brushed nickel, nickel satin
handle	
rosette WK, WB	
rosette WC	

UNICO



split plate

colour	structural graphite, black matt, white matt
handle	
rosette WK, WB	
rosette WC	

IMAGE-O INOX



split plate

colour	stainless steel
handle	
rosette WK, WB	
rosette WC	

LINEA



split plate

colour	brushed nickel, graphite chrome, glossy chrome
handle	
rosette WK, WB	
rosette WC	

CRUX



split plate

colour	nickel satin, satin chrome
handle	
rosette WK, WB	
rosette WC	

TOPAZ



split plate

colour	stainless steel
handle	
rosette WK, WB	
rosette WC	

BOLD



split plate

colour	stainless steel
handle	
rosette WK, WB	
rosette WC	

AGOSTO



split plate

colour	stainless steel
handle	
rosette WK	
rosette WB	
rosette WC	

AUTUNNO



split plate

colour	brushed nickel, brushed chrome, glossy chrome
handle	
rosette WK, WB	
rosette WC	

SEMPRE



split plate

colour	nickel
handle	
rosette WK, WB	
rosette WC	

VERANO



split plate

colour	glossy chrome, brushed nickel, brushed chrome, black
handle	
rosette WK, WB	
rosette WC	

ESTATE



split plate

colour	brushed chrome, brushed nickel	glossy chrome
handle		
rosette WK		
rosette WC		

ARABIS



split plate

colour	black
handle	
rosette WK, WB	
rosette WC	

IBIZA



split plate

colour	black
handle	
rosette WK, WB	
rosette WC	

TWIST



split plate

colour	stainless steel
handle	
rosette WK, WB	
rosette WC	

PRIMAVERA



split plate

colour	brushed chrome without insert, black without insert
handle	
rosette WK	
rosette WC	
The insert in the colour of the door is available. Insert-compatible handle	

INVERNO



split plate

colour	brushed nickel, brushed chrome, black	glossy chrome
handle		
rosette WK, WB		
rosette WC		

APRILE



split plate

colour	glossy chrome, brushed nickel, brushed chrome
handle	
rosette WK, WB	
rosette WC	

LATON



split plate

colour	stainless steel
handle	
rosette WK, WB	
rosette WC	

NIQUEL



split plate

colour	stainless steel
handle	
rosette WK, WB	
rosette WC	

HALLEY



split plate

colour	chrome/brushed nickel, antique brass
handle	
rosette WK, WB	
rosette WC	

HIGRO



split plate

colour	stainless steel
handle + rosette WK	
handle + rosette WB	
handle + rosette WC	

Handle + rosette HIGRO WC are designed for HIGRO doors only.

EXIMUS



split plate

colour	chrome/black, chrome/white, satin chrome/ black, satin chrome/white
handle	
rosette WK, WB	
rosette WC	

BERGENIA



split plate

colour	black matt, polished chrome, satin chrom, polished gold, gold matt
handle	
rosette WK, WB	
rosette WC	

LUPINA



split plate

colour	black matt, polished chrome, satin chrom
handle	
rosette WK, WB	
rosette WC	

ARNICA



split plate

colour	black matt, polished chrome, satin chrom
handle	
rosette WK, WB	
rosette WC	

PATINA



split plate

colour	stainless steel
handle	
rosette WK, WB	
rosette WC	

SATEN



split plate

colour	stainless steel
handle	
rosette WK, WB	
rosette WC	

ANMI



split plate

colour	golden-matt golden gloss
handle	
rosette WK, WB	
rosette WC	

TRITTON



long plate spacing: 72 mm

colour	nickel-matt, patina
handle + rosette WK	
handle + rosette WB	
handle + rosette WC	

dedicated for doors in the rebated system

GALE (left, right)



long plate spacing: 72 mm

colour	chrome, brushed nickel, antique brass
handle + rosette WK	
handle + rosette WB	
handle + rosette WC	

dedicated for doors in the rebated system

CYLINDERS

Lp.	Cylinder size	Manufacturer	Interior doors							
			rebated single leaf type, Type A, Type B	rebated double leaf type	non-rebated single leaf type, Type A, Type B	non-rebated with an electric strike	non-rebated double leaf type	non-rebated double leaf Type A, Type B, HARMONY INVEST	HARMONY, REVES	Lumen
1	30x35	LOB	x	x			x			
2	30x30	LOB			x					x
3	30x40	LOB						x		
4	35x30	LOB				x			x	