



SILENTTYPE (TG)



Germany brand



Notes:

- The tonnage is the weights summation of generator, waer tank with water, fuel tank with fuel, and trailer, The maximum tonnage can reach 6800 kg, Models 3500kg above are air braked. Models between 750kg(not including) and 3500kg are mechanically braked. Models below 750kg (including 750kg) have no brake system.
- The capability of fuel tanks vary when use various engines. The minimum capability meets at least 8 hours use.



30kVA below model 30-130kVA model 130-250kVA model 250-500kVA model 250-500kVA model



Generating Sets




railer









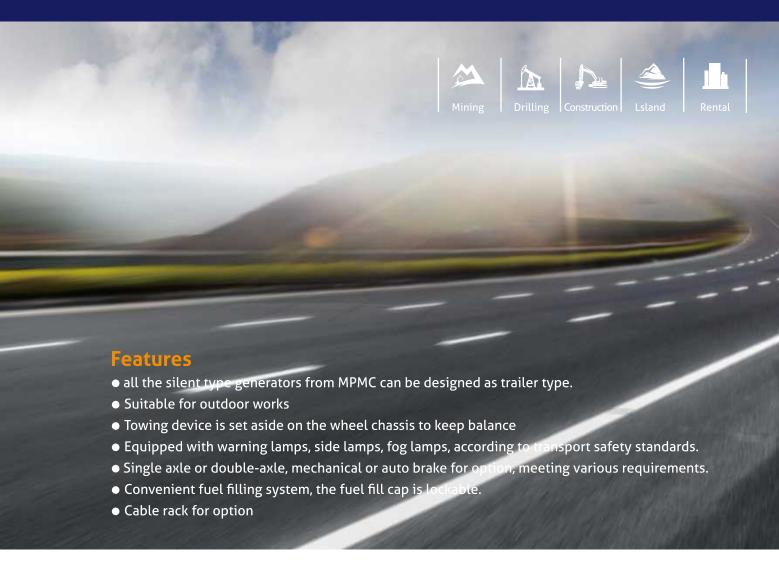

Trailer Structure introduction



Fitting eye end options





Ball Type

O Ring Type

- The main difference between the on-road trailer and off road trailer.
- The off road trailer has no inertia brake system, the on-road trailer has service brake and parking brake.
- The on-road reailer speed ≤60km/h and the off road trailer speed ≤25km/h.







