

SCORPIUS N4404

NORDIC LIGHTS® Scorpius N4404 work light offers strong illumination with an operational lumens output of 3200 lm. This LED work light features all characteristics expected of a high-end heavy-duty work light, offering long lifetime and high operational safety with minimum maintenance. The Scorpius N4404 is suitable for harsh conditions and a wide range of applications.



Not all products are available in all markets. During continuous improvement specifications and design are changing. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific. The lumens output varies depending on lens colour.

TECHNICAL DATA

Theoretical Lumens Output	5000 lm	Vibration	15.3Grms 24-2000Hz
Operational Lumens Output	3200 lm	Lens	PC
Colour Temperature	5700 K	Body / Housing	Aluminium
Nominal Voltage DC	12 - 24 V	Weight	1.1 kg
Input Voltage DC	9 - 32 V	IP Rating	IP68, IP6K9K, SAE J1455
Power Consumption	35 W	Salt Spray Test	ISO 9227 240H
Nominal Current at	24V=1.45A, 12V=2.9A	EMC	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2
Connector	Built-in Deutsch DT-2 (2-pin)	Operating Temperatures	-40°C... +85°C (Overheat protected)
Mount	Single Bolt M10	Part Numbers	High Beam: 984-308, Flood: 984-306, Wide Flood: 984-302, Low Beam: 984-307
Shock	60G		

CONNECTORS




Built-in Deutsch DT-2 (2-pin)

KEY FEATURES


- Vibration and shock resistant
- Operational lumens output: 3200lm
- For harsh conditions

LIGHT PATTERNS


**N4403 QD, N4404, 3200lm
Wide Flood**

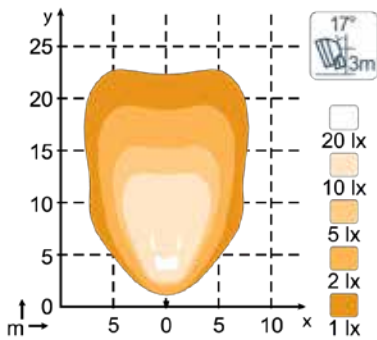


**N4403 QD, N4404, 3200lm
Flood**

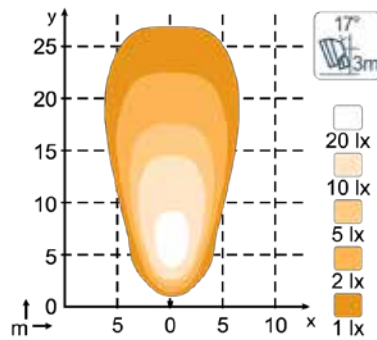


**N4403 QD, N4404, 3200lm
High Beam**

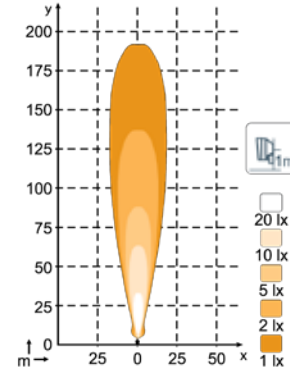

**N4403 QD, N4404, 3200lm
Low Beam**

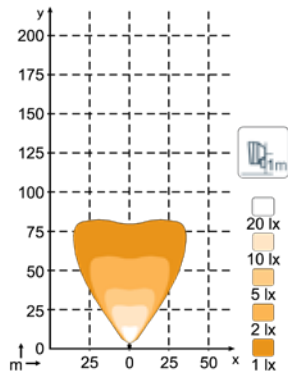

**N4403 QD, N4404, 2500lm
Diffused**

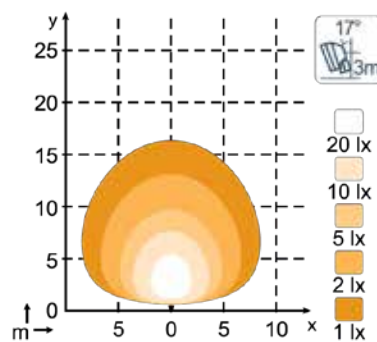

DRAWINGS

