

# 14K 4-POST 4P14

Challenger's 14,000 lb. closed-front drive-on 4-post lift features a low approach angle and wide runways for easy approach. It also has one of the highest rise in the industry and durable column construction.

## REQUIREMENTS

- 78" + VEHICLE**
- 14' RECOMMENDED**
- 25' - 28' REC.**
- 208-230V, 1PH, 20A**

**CONCRETE**  
4" thick, reinforced, free from cracks/seams, 3500+ psi & cured 28+ days



## SPECIFICATIONS

PART NUMBER	4P14EFX	4P14XFX
Overall Length (A)	20' 5 <sup>3</sup> / <sub>4</sub> "	22' 9 <sup>1</sup> / <sub>4</sub> "
Overall Width (B)	10' 10 <sup>3</sup> / <sub>4</sub> "	
Inside Columns (C)	9' 8"	
Between Columns (D)	16' 4"	18' 7 <sup>1</sup> / <sub>2</sub> "
Height of Columns (E)	7' 6 <sup>1</sup> / <sub>2</sub> "	
Height of Runways (F)	7 <sup>1</sup> / <sub>4</sub> "	
Width of Runways (G)	20"	
Width Between Runways (H)	40" / 43"	
Min/Max Wheelbase (I)	89 <sup>3</sup> / <sub>4</sub> "/182 <sup>1</sup> / <sub>2</sub> "	103 <sup>3</sup> / <sub>8</sub> "/210"
Rise Height (J)	6' 6"	
Rise Time	75s	
Min. Bay Size	14' x 25'	12' x 28'
ALI <sup>®</sup> Certified	<input checked="" type="checkbox"/>	

## SERVICE BAY LAYOUT

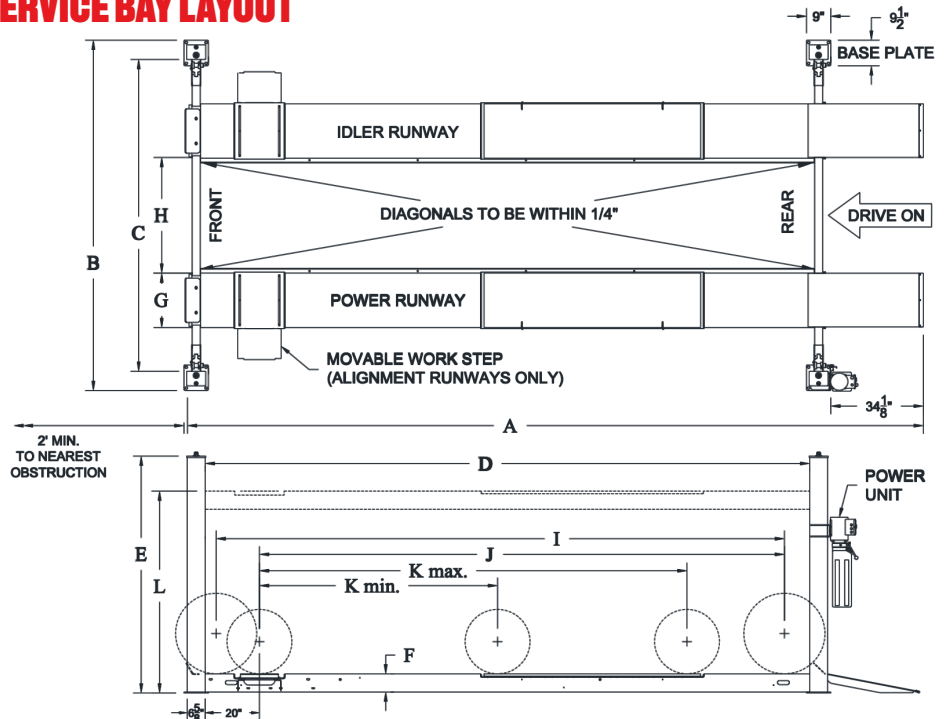


Fig 1 – General Specifications and Service Bay Layout