


SenTekse: 10BASE-T1L/SPoE Switch

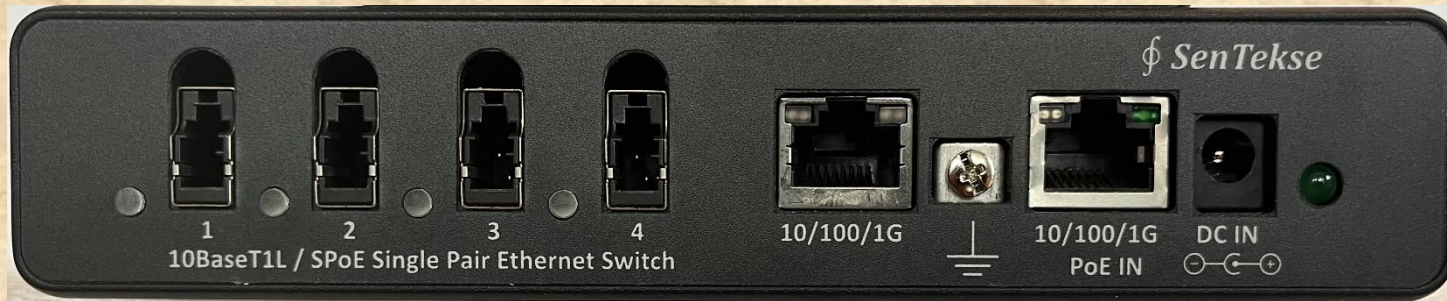

Stacking Port

Switch power:
PoE or AC/DC adapter

- 6-port unmanaged switch (Layer 2):
 - 4-ports single pair ethernet -
 - Data 10 MB/s - 10BASE-T1L (1000+ m)
 - Power Delivery - Single-pair Power over Ethernet (SPoE) with Serial Communication Classification Protocol (SCCP) - Class 13, Class 14
 - > 1000+m /18 AWG - To Powered Device (PD) - 7.7 w
 - > 445 m /18 AWG - To Powered Device (PD) - 20 w
 - > 400+ m /23 AWG - To Powered Device (PD) - 7.7 w
 - > 145 m /23 AWG - To Powered Device (PD) - 20 w
 - SPE connector (MDI) - IEC 63171-1 (LC)
- LED power indicators
- GND terminal
- Switch powered by PoE or AC/DC adapter (local power option)

Contact For Pricing Lead Time:
Chris DiMinico cdiminico@senteckse.com