

Limited Warranty

General

Custom Firescreen, Inc.'s products are warranted to be free from defects in materials and/or workmanship which occur during normal use for a period of one year from date of original purchase, except wherein specific items are stated otherwise. The warranty does not cover damage which occurs in shipment or failures or faults which result from accident, misuse, neglect, mishandling, any alteration or faulty installation by persons other than Custom Firescreen, Inc. designated employees. Damage caused by acidic corrosion is not covered under warranty;

Extended Warranty

All metal tubing - Five years from date of original purchase.

Obligation of the owner

The owner should read and follow the listed instructions and the Operation Guide. If it becomes necessary to return the product during the warranty period, the owner is advised to be guided by the dealer from whom the purchase was made for assistance and instructions. Custom Firescreen Inc. must be notified before any product is returned to the factory for warranty performance. Custom Firescreen Inc. reserved the option of determination of cause, or to replace the malfunctioning product.


Limits and Exclusions

There are no expressed or implied warranties except as listed above. Custom Firescreen Inc. shall not be liable for incidental or consequential damage resulting from improper use of this product, or arising out of any breach of warranty including, without limitation, damage to firebox, chimney, and fireplace internal and external support structures. This warranty is extended only to the original purchaser. A purchase receipt or other proof of purchase of date of original purchase will be required before warranty performance is rendered. This warranty gives you specific legal rights and you may have other rights which may vary from state to state.

WARNING:

Be aware that the first time you burn on your new Emberaire that it will put off a white smoke. This smoke is normal and can be diverted back into the fireplace and be drawn up the chimney with a piece of paper used as a funnel. The smoke will last about 3 to 5 minutes. If you have birds and animals in the house. They should be removed from the house on the first burn. People that are asthmatic and children should also not be in the area during the first burn.

EMBERAIRE INSTALLATION AND OPERATION MANUAL

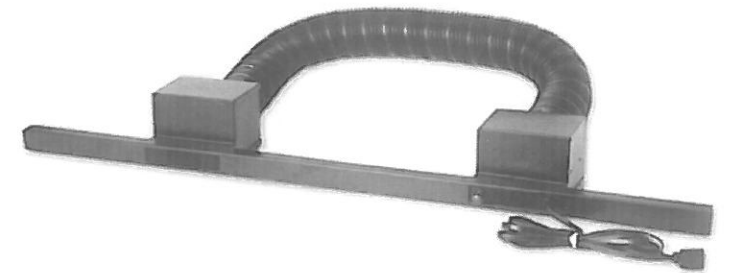

Preparation

A) Unpack your Emberaire carefully from its container. Be sure all components have been received in good condition with no damage.

List:

- 1- Emberaire blower housing
- 1- Emberaire exhaust housing
- 1- Exchanger tube
- 6- Tube mounting screws
- 1- Black vent bar
- 2- Metal tape

B) Be sure the firebox has a minimum depth of 19", minimum front width of 28", and rear width of 20". These measured dimensions are necessary to allow room for proper installation.

C) Remove any existing ashes and other impediments from the fireplace. If you are using a glass door, check to see that it can be raised 1 3/8" to allow for the Emberaire and vent bar to set under the door frame. At this time you may also want to have your chimney cleaned.

Installation

A) The Emberaire exchanger tube comes already bent for your convenience. The blower and exhaust housings come unattached so you can determine which side you want the cord to come out. It is also made just a little long to accommodate many different depths of fireplaces. **(SAFETY FIRST)** The edges of the tube are very sharp and can cause nasty cuts. Wear leather gloves when bending the tubing.

B) Attach the boot housings with the self drilling screws that are provided. 3 on each side. Always put a screw in the top of the tube to start with that way the boxes will lay flat on the floor.

C) After mounting the housings to the tube. You can adjust the tube with slight bends. Also the tube can be collapsed to adjust for depth in the fireplace.

D) The back of the tube should go on top of the grate and if you are using a gas log the tube will replace the back log.

E) After fitting the housing into the vent bar that is provided. Use the metal tape to along the top of the vent bar just over the housings to hold the vent bar on.

Operation

WARNING: If you have birds and animals in the house. They should be removed from the house on the first burn. People that are asthmatic and children should also not be in the area during the first burn.

A) Always keep your new Emberaire plugged in.

B) Always turn the blower on before you start to burn a fire. This is very important to give your new Emberaire a long life. Be sure the damper to the fireplace is in the open position before lighting a fire.

Always turn your Emberaire on and leave it on till your done burning.

C) Always leave your blower turned on at all times when burning your fireplace until the fire is completely burned out. This is very important to cool the blower motor.

WARNING: Be aware that the first time you burn on your new Emberaire that it will put off a white smoke. This smoke is normal and can be diverted back into the fireplace and be drawn up the chimney with a piece of paper used as a funnel. The smoke will last about 3 to 5 minutes.

D) The Emberaire has two speeds (high and low). For more heat use the high setting. For less heat and less noise use the low setting.

E) It is OK to burn directly on the exchanger tube. But for long life always set any logs on the tube trying not to drop the wood on it.