

## PRIMARY WIRE

☒ 100' lengths

☒ Strips easily

☒ OEM Specs

☒ Abrasion  
Resistant



Gauge	Black	Red	White	Blue	Brown	Green	Yellow	Orange
18	20115	20116	20117	20118	20119	20120	20121	20122
16	20123	20124	20125	20126	20127	20128	20129	20130
14	20131	20132	20133	20134	20135	20136	20137	20138
12	20139	20140	20141	20142	20143	20144	20145	20146
10	20147	20148	20149	20150	20151	20152	20153	20154
8	20155	20156	20157	20158	20159	20160	20161	20162

## CROSS LINK PRIMARY WIRE

☒ 100' lengths

☒ Cross linked covering for added wear resistance

☒ Can be used where with water, oil and chemicals break down typical coverings.

☒ Temperature rated to 257°F

Gauge	Black	Red	White	Blue	Green	Brown
18	20170	20171	20172	20173	20174	20175
16	20176	20177	20178	20179	20180	20181
14	20182	20183	20184	20185	20186	20187
12	20188	20189	20190	20191	20192	20193
10	20194	20195	20196	20197	20198	20199

## MARINE WIRE

☒ 100' & 250' lengths

☒ Meets US Coast guards specs

☒ Tin electroplated copper provides ultimate protection against corrosion.

☒ Temperature rated to 221°

F

GAUGE	Black	Red	White	Blue	Green	Brown
16	20150M	20151M	20152M	20153M	20154M	20155M
14	20156M	20157M	20158M	20159M	20160M	20161M
12	20162M	20163M	20164M	20165M	20166M	20167M
10	20168M	20169M	20170M	20171M	20172M	20173M
8	20174M	20175M	20176M	20179M	20180M	20181M
6	20182M	20183M	20184M	20185M	20186M	20187M

## DUPLEX & TRIPLEX MARINE WIRE

<b>TINNED</b>					<b>SPOOL</b>	<b>SPOOL</b>
					<b>100</b>	<b>250</b>
2 WIRE	14GA	BLACK	WHITE		20701	20706
3 WIRE	16GA	BLACK	WHITE	GREEN	20702	20707
	14GA	BLACK	WHITE	GREEN	20703	20708
	12GA	BLACK	WHITE	GREEN	20704	20709
	10GA	BLACK	WHITE	GREEN	20705	20710

## DUPLEX & TRIPLEX TRAILER WIRE



<b>PLAIN</b>	<b><u>FLAT PVC JACKET</u></b>				<b>SPOOL</b>	<b>SPOOL</b>	
					<b>100'</b>	<b>250'</b>	
2 WIRE	18GA	BLACK	WHITE		20711	20715	
	16GA	BLACK	WHITE		20712	20716	
	14GA	BLACK	WHITE		20713	20717	
	12GA	BLACK	WHITE		20714	20718	
<b><u>TYPE SJOOW RUBBER JACKET</u></b>					<b>SPOOL</b>	<b>SPOOL</b>	
					<b>100'</b>	<b>250'</b>	
2 WIRE	18GA	BLACK	WHITE		20719	20722	
	16GA	BLACK	WHITE		20720	20723	
	14GA	BLACK	WHITE		20721	20724	
3 WIRE	18GA	GRAY	WHITE	GREEN	20725	20728	
	16GA	GRAY	WHITE	GREEN	20726	20729	
	14GA	GRAY	WHITE	GREEN	20727	20730	
4 WIRE	16GA	WHITE	RED	GREEN	BROWN	20731	20733
	14GA	WHITE	RED	GREEN	BROWN	20732	20734
6 WIRE	16 GA	YELLOW, RED, GREEN, BROWN, BLUE, BLACK			20735	20739	
	14 GA	YELLOW, RED, GREEN, BROWN, BLUE, BLACK			20736	20740	
	12 GA	YELLOW, RED, GREEN, BROWN, BLUE, BLACK			20737	20741	
7 WIRE	12 GA	WHITE, BROW, BLUE			<b>14 GA BLK, YELL, RED, GREEN</b>	20736	20742
		<b>10 GA WHITE</b> , 12 GA BRN, BLUE, BLK, YELL, RED, GREEN			20737	20743	
		8GA WHITE, <b>10GA RED, BLU</b> 12GA BRN, BLK, YELL, GREEN			20738	20744	

# TRAILER CONNECTORS AND PLUGS

## 4CONDUCTOR



RUBBER  
DIE CAST

MALE  
20750  
20752

FEMALE  
20751  
20753

## 6 CONDUCTOR



RUBBER BOOT  
SPRING

MALE  
20754  
20756  
20757

FEMALE  
20755



## 7 CONDUCTOR



RUBBER BOOT  
SPRING

MALE  
20758  
20760

FEMALE  
20759

# ELECTRICAL TAPE



**3M 33+** - Workable to 220 F - Sticks When Dirty  
Resistant to Flame, Abrasive Resistant, Sunlight,  
Moisture, Alkaline & Solvents and Oil.

**Part Number** 3/4" x 66' roll  
**21300**



**3M Super 88** - Workable from below Zero to 220 F  
Resistant to Flame, Abrasive Resistant, Sunlight,  
Moisture, Alkaline & Solvents and Oil.  
The Choice of Professionals

**Part Number** 3/4" x 66' roll  
**21302**



**TEMFLEX** - Workable to 220 F  
Resistant to Flame, Abrasive Resistant, Sunlight,  
Moisture, Alkaline & Solvents and Oil.  
Where long life isn't a requirement

**Part Number** 3/4" x 66' roll  
**21335**



**3M 35-** Workable to 220 F - Sticks When Dirty  
Resistant to Flame, Abrasive Resistant, Sunlight,  
Moisture, Alkaline & Solvents and Oil.  
Easily Identify Wiring and Bundles

3/4" x 66' roll

<b>Part Number</b>	<b>Color</b>
<b>21303</b>	<b>White</b>
<b>21304</b>	<b>Red</b>
<b>21305</b>	<b>Blue</b>
<b>21306</b>	<b>Green</b>
<b>21307</b>	<b>Yellow</b>

# GROMMENTS BUNA N



Use To Eliminate Vibration to Protection Wires and Hose  
 Pliable Buna N For Easy Installation

PART NUMBER	A BORE DIAMETER	B GROOVE WIDTH	C GROOVE DIAMETER	D OUTSIDE DIAMETER	E OVERALL THICKNESS
16100	1/8"	1/32"	9/16"	1/4"	3/32"
16101	5/32"	1/16"	1/4"	3/8"	3/16"
16102	5/32"	3/32"	1/4"	7/16"	3/8"
16103	11/16"	5/64"	3/8"	1 5/16"	1"
16104	25/32"	3/32"	3/8"	1 9/32"	1 1/16"
16105	3/16"	1/16"	5/16"	1/2"	1/4"
16106	3/16"	3/32"	9/32"	7/16"	7/32"
16107	3/16"	1/4"	5/16"	7/16"	3/8"
16108	1/4"	1/16"	7/16"	5/8"	3/16"
16109	1/4"	1/16"	1"	1 1/4"	1/4"
16110	1/4"	1/8"	7/16"	5/8"	3/16"
16112	5/16"	1/16"	7/16"	9/16"	3/16"
16113	5/16"	1/16"	9/16"	13/16"	5/16"
16114	5/16"	1/4"	9/16"	13/16"	5/16"
16115	5/16"	1/8"	9/16"	13/16"	3/8"
16116	5/16"	1/4"	9/16"	13/16"	1/2"
16117	3/8"	1/16"	1/2"	11/16"	9/32"
16118	3/8"	1/16"	5/8"	7/8"	5/16"
16119	3/8"	1/8"	5/8"	7/8"	5/16"
16120	3/8"	1/16"	1"	1 1/4"	1/4"
16121	3/8"	1/4"	5/8"	7/8"	1/2"
16122	7/16"	1/16"	11/16"	15/16"	5/16"
16123	1/2"	1/16"	13/64"	1 1/16"	5/16"
16124	1/2"	1/8"	15/16"	1 1/16"	13/16"
16125	1/2"	1/16"	1 1/4"	1 1/2"	1/4"
16126	1/2"	3/32"	3/4"	31/32"	9/32"
16127	1/2"	3/32"	25/32"	1"	11/32"
16128	1/2"	1/4"	13/32"	1 1/16"	1/2"
16129	11/16"	1/8"	1"	1 15/16"	3/8"
16130	5/8"	1/8"	7/8"	1 1/8"	3/8"
16131	5/8"	1/16"	7/8"	1 1/8"	5/16"
16132	3/4"	1/16"	15/16"	1 1/8"	1/4"
16133	3/4"	1/16"	1 1/16"	1 3/8"	3/8"
16134	3/4"	1/16"	1 1/4"	1 5/8"	1/4"
16135	3/4"	1/4"	1 1/4"	1 5/8"	7/16"
16136	7/8"	1/16"	1 1/4"	1 5/8"	7/16"

# HEAT SHRINK ELECTRICAL TERMINALS

Double Wall Heat Shrink Mastic Is Self-Sealing Provides a Strain Relief

Traslusent Tubing Allows For Easy Inspection of Connection

Vapor Barrier Seal Keeps Out Air, Moisture, Salt, Dirt, Oils and Abrasives

## RING TERMINAL

SIZE		4 - 6	8	10	1/4	5/16	3/8	1/2
GAUGE	22-18	20200	18800	20201	18801	18802	18803	
	16-14	20205	18804	20206	20207	18805	20208	
	12-10	18806	18807	20215	20216	18808	20217	18809



## OPEN SPADE TERMINAL

SIZE		4 - 6	8	10
GAUGE	16-14		18813	20209
	12-10	18814	18815	20219



## OPEN HOOK TERMINAL

SIZE		6
GAUGE	16-14	18816



## BUTT CONNECTOR

SIZE		
GAUGE	22-18	20202
	16-14	20214
	12-10	20218



## MULTI WIRE CONNECTOR

SIZE		3 WAY	4 WAY
GAUGE	22-18	18817	18820
	16-14	18818	18821
	12-10	18819	18822



## HEAT SHRINK ELECTRICAL TERMINALS

Double Wall Heat Shrink - Mastic Is Self-Sealing - Provides a Strain Relief  
 Translucent Tubing Allows For Easy Inspection of Connection  
 Vapor Barrier Seal Keeps Out Air, Moisture, Salt, Dirt, Oils and Abrasives

### SNAP QUICK DISCONNECTS

SIZE		FEMALE		MALE	
<b>BULLET SIZE</b>		<b>0.156</b>	<b>0.180</b>	<b>0.156</b>	<b>0.180</b>
<b>GAUGE</b>	<b>22-18</b>	18227	18828	18831	18832
	<b>16-14</b>	18829	18830	18833	18834
	<b>12-10</b>	18836	18837	18838	18839




### QUICK DISCONNECTS INSULATED

SIZE		FEMALE	MALE
<b>BULLET SIZE</b>		<b>1/4"</b>	<b>1/4"</b>
<b>GAUGE</b>	<b>22-18</b>	20203	20204
	<b>16-14</b>	20212	20213
	<b>12-10</b>	18825	18826



### QUICK DISCONNECTS

SIZE		FEMALE	MALE
<b>BULLET SIZE</b>		<b>1/4"</b>	<b>1/4"</b>
<b>GAUGE</b>	<b>22-18</b>	18823	18824
	<b>16-14</b>	20210	20211
	<b>12-10</b>	20202	20221

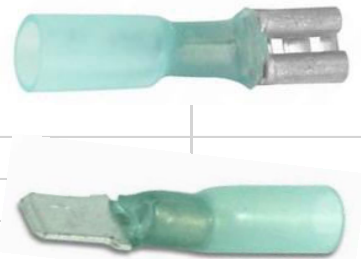

### QUICK FLAG DISCONNECT

SIZE		FEMALE
<b>BULLET SIZE</b>		<b>1/4"</b>
<b>GAUGE</b>	<b>16-14</b>	18840



CENTRAL IOWA FASTENERS

# LARGE WIRE GAUGE TERMINALS

## RING TERMINAL

STUD SIZE		#10	1/4"	5/16"	3/8"	7/16"	1/2"
GAUGE	8 GA	18622	18623	18624	18625	18626	18627
	6 GA	18629	18630	18631	18632	18633	18634
	4 GA	18636	18637	18639	18640	18641	18642



## BUTT CONNECTOR

GAUGE	6 GA	18628
	8 GA	18635
	4 GA	18643



# HIGH TEMPERATURE TERMINALS

Nickel Plated Alloy Steel

900 Degree Operating Temp - 1200 Degree Intermittent

## RING TERMINAL

STUD SIZE		#4	#6	#8	#10	1/4
GAUGE	22-18	17803	17804	17805	17806	
	16-14	17807	17808	17809	17810	
	12-10		17811	17812	17813	17814



## BUTT CONNECTORS

GAUGE	22-18	17800
	16-14	17801
	12-10	17802



## QUICK DISCONNECTS

		FEMALE	MALE
GAUGE	16-14	17815	17816



CENTRAL IOWA FASTENERS



# NYLON ELECTRICAL TERMINALS

Superior Vibration Resistance and Barrel Strength

Exceeds Military Specifications - Will Take More Heat Than Vinyl Insulated Terminals

Funnel Entry Assures Easy and Accurate Installation

## RING TERMINAL

SIZE		4	4 - 6	8	8 - 10	1/4	1/4 - 5/16	3/8	1/2
<b>GAUGE</b>	<b>22-18</b>	19500	19501	19502	19503	19504	19505		
	<b>16-14</b>	19530	19531	19532	19533	19534	19535	19536	
	<b>12-10</b>	19560	19561	19562	19563	19564	19565	19566	19567




## OPEN SPADE TERMINAL

SIZE		4	4 - 6	8	8 - 10
<b>GAUGE</b>	<b>22-18</b>	19507	19508		
	<b>16-14</b>	19537	19538		
	<b>12-10</b>		19568	19569	19571



## OPEN HOOK TERMINAL

SIZE		6	6 - 8	10
<b>GAUGE</b>	<b>22-18</b>	19511	19512	19513
	<b>16-14</b>	19541	19542	19543
	<b>12-10</b>	19571	19572	19573




## BUTT CONNECTOR

SIZE		
<b>GAUGE</b>	<b>22-18</b>	19514
	<b>16-14</b>	19544
	<b>12-10</b>	19574



## MULTI WIRE CONNECTOR

SIZE		3 WAY	4 WAY
<b>GAUGE</b>	<b>22-18</b>	19515	19516
	<b>16-14</b>	19545	19546
	<b>12-10</b>	19575	19576

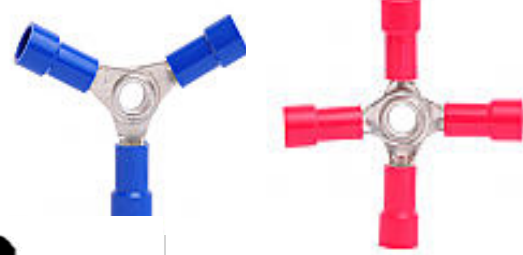

## NYLON ELECTRICAL TERMINALS

Superior Vibration Resistance and Barrell Strength

Exceeds Military Specifications - Fully Covered Added Protection

Funnel Entry Assures Easy and Acccturate Insatallation

### SNAP QUICK DISCONNECT

#### FEMALE

#### MALE

BULLET SIZE		0.156	0.180	0.156	0.180
<b>GAUGE</b>	<b>22-18</b>	19527	19528	19523	19525
	<b>16-14</b>	19552	19554	19553	19555
	<b>12-10</b>	19577		19578	



### QUICK DISCONNECT

#### FEMALE

#### MALE

BULLET SIZE		3/16"	1/4"	3/16"	1/4"
<b>GAUGE</b>	<b>22-18</b>	19517	19519	19518	19520
	<b>16-14</b>	19547	19549	19548	19550
	<b>12-10</b>		19577		19578



Zinc Plated

FOR 1/4" BOLT	
PART NUMBER	SIZE
21200	1/4"
21201	5/16"
21202	3/8"
21203	1/2"
21204	5/8"
21205	3/4"
21206	7/8"
21207	1"



FOR 3/8" BOLT	
PART NUMBER	SIZE
21210	1/4"
21211	5/16"
21212	3/8"
21213	1/2"
21214	5/8"
21215	3/4"
21216	7/8"
21217	1"
21218	1 1/4"
21219	1 1/2"

Available in Stainless








FOR 1/4" BOLT	
PART NUMBER	SIZE
21225	3/16"
21226	1/4"
21227	5/16"
21228	3/8"
21229	7/16"
21230	1/2"
21231	5/8"
21232	3/4"



NYLON LOOM CLAMP	
FOR 1/4" BOLT	
PART NUMBER	SIZE
21235	1/4"
21236	5/16"
21237	3/8"
21238	1/2"
21239	5/8"
21240	3/4"
21241	1"

**UL94 HB rating.**

AT SERIES™ receptacles and wedges are made from a thermoplastic material that offers durability and UV resistance for the receptacle assembly. Each receptacle includes a silicone elastomeric wire seal to help prevent environmental ingress. To complete a receptacle assembly, one AT SERIES™ receptacle housing, receptacle wedge and receptacle pins are required, All AT SERIES™ receptacle assemblies mate directly with Deutsch DT™ Series plug housings/assemblies. The thermoplastic material is rated to -55°C (-67°F to 257°F) and meets UL 94 HB rating.

	<b>Part Number</b>	<b>Description</b>
	20800	2 WIRE RECEPTACLE HOUSING
	20801	3 WIRE RECEPTACLE HOUSING
	20802	4 WIRE RECEPTACLE HOUSING
	20803	6 WIRE RECEPTACLE HOUSING
	20804	8 WIRE RECEPTACLE HOUSING
	20805	12 WIRE RECEPTACLE HOUSING
	20810	2 WIRE PLUG HOUSING
	20811	3 WIRE PLUG HOUSING
	20812	4 WIRE PLUG HOUSING
	20813	6 WIRE PLUG HOUSING
	20814	8 WIRE PLUG HOUSING
	20815	12 WIRE PLUG HOUSING
	20820	2 WIRE RECEPTACLE WEDGE
	20821	3 WIRE RECEPTACLE WEDGE
	20822	4 WIRE RECEPTACLE WEDGE
	20823	6 WIRE RECEPTACLE WEDGE
	20824	8 WIRE RECEPTACLE WEDGE
	20825	12 WIRE RECEPTACLE WEDGE
	20830	16-14 NICKEL PLATED - CRIMPED
	20831	16-18 NICKEL PLATED - CRIMPED
	20832	16-18 NICKEL PLATED - SOLID
	20833	16-18 GOLD PLATED - SOLID
	20835	16-14 NICKEL PLATED - CRIMPED
	20836	16-18 NICKEL PLATED - CRIMPED
	20837	16-18 NICKEL PLATED - SOLID
	20838	16-18 GOLD PLATED - SOLID
	20839	SILICONE SEALING PLUG

## COPPER LUGS

- Solder or crimp on Copper Lugs
- Tin plated for extra corrosion resistance.



## STRAIGHT LUGS

Part No.	Gauge	Stud Size	Part No.	Gauge	Stud Size
20580	8	#10	20592	2	1/4"
20581	8	1/4"	20593	2	5/16"
20582	8	5/16"	20227	2	3/8"
20583	8	3/8"	20594	2	1/2"
20584	8	1/2"	20595	1	1/4"
20585	6	#10	20596	1	5/16"
20586	6	1/4"	20228	1	3/8"
20587	6	5/16"	20597	1	1/2"
20588	6	3/8"	20598	1/0	5/16"
20589	6	1/2"	20230	1/0	3/8"
20226	4	5/16"	20231	1/0	1/2"
20225	4	3/8"	20232	2/0	3/8"
20591	4	1/2"	20599	3/0	3/8"
20234	3/0	1/2"			

## 90 DEGREE LUGS

Part No.	Gauge	Stud Size	Part No.	Gauge	Stud Size
20360	4	3/8"	20638	2/0	3/8"
20361	4	1/2"	20639	2/0	1/2"
20362	2	3/8"	20640	3/0	3/8"
20363	2	1/2"	20641	3/0	1/2"
20364	1	3/8"	20642	4/0	3/8"
20365	1	1/2"	20643	4/0	1/2"
20366	1/0	3/8"			
20367	1/0	1/2"			



## COPPER LUGS



- Solder or crimp on Copper Lugs
- Tin plated for extra corrosion resistance.

### 45 DEGREE LUGS

Part No.	Gauge	Stud Size	Part No.	Gauge	Stud Size
20610	4	5/16"	20619	1/0	5/16"
20611	4	3/8"	20620	1/0	3/8"
20612	4	1/2"	20621	1/0	1/2"
20613	2	5/16"	20622	2/0	5/16"
20614	2	3/8"	20623	2/0	3/8"
20615	2	1/2"	20624	2/0	1/2"
20616	1	5/16"	20625	3/0	3/8"
20617	1	3/8"	20626	3/0	1/2"
20618	1	1/2"	20627	4/0	3/8"
			20628	4/0	1/2"

### COPPER CABLE BUTT CONNECTORS

- \* Solder or crimp on Copper Lugs
- \* Tin plated for extra corrosion resistance



Part No.	Size
20235	6
20236	4
20237	2
20238	1
20239	1/0
20240	2/0
20241	3/0
20242	4/0

## SPECIALTY ELECTRICAL TAPE



**3M 70 Self-Fusing Silicone Tape**  
 Track Resistant - Excellent Over Wrap tape  
 Class H Temperature Rating - 356 Degree

**Part Number**                      **1" x 30' Roll**  
**21313**

**3M 27 Glass Tape - 300 Degree Heat Stable Insulator**  
 Used Over Splices - Permanent Bonding  
 Won't Burn, Shrink or Rot Class B - Rated



**Part Number**                      **Size**  
**21310**                                  1/2" x 66'  
**21311**                                  3/4" x 66'



**3M 69 Hi-Temp Glass Tape - 366 Degree Heat Stable**  
 Used Over Splices - Permanent Bonding  
 Won't Burn, Shrink or Rot Class H - Rated

**Part Number**                      **Size**  
**21312**                                  3/4" x 66'

**3M 130C Linerless Tape - Provides a Void Free, Moisture Resistant Seal - Weather Proof Splices**



**Part Number**                      **Size**  
**21314**                                  3/4" x 66'  
**21314S**                                  1 1/2" x 66'



**3M Scotchfill Moisture Proof Connections**  
 All Season Protection in Harsh Conditions  
 Easy to Use, Increases the Strength of the Connection

**Part Number**                      **Size**  
**21341**                                  2 1/2" Squares  
**21342**                                  3/4" x 60"



CENTRAL IOWA FASTENERS

## SPECIALITY ELECTRICAL TERMINALS

Terminals that Fit Special Needs

**PART  
NUMBER**

**18598** Double Male - Female Jumper Adapter



**PART  
NUMBER**

**18591** Double Male - Female Adapter



**PART  
NUMBER**

**18592** Glass Fuse Jumper



### SNAP TERMINAL

Makes Wiring Terminal Blocks Easier - Holds Hard to Get to Wires Easier

	SIZE	4	6	8	10	1/4
<b>PART NUMBER</b>	<b>22-18</b>	18700	18701	18702	18703	
	<b>16-14</b>	18704	18705	18706	18707	18708
	<b>12-10</b>	18709	18710	18711	18712	



### FLAG TERMINAL UNINSULATED

	SIZE	.187	.250
<b>PART NUMBER</b>	<b>22-18</b>	18720	18721
	<b>16-14</b>	18722	18723
	<b>12-10</b>		18724



CENTRAL IOWA FASTENERS



## **STEP DOWN HEAT SHRINK BUTT CONNECTORS**

- ▶ Eliminates the corrosion problems associated with using Scotchlok terminals.
- ▶ Protects against the corrosion of Calcium Chloride.
- ▶ Heat Shrink Step Down Connectors are a permanent repair, not a temporary fix.



### **Use and Crimping Data**

<b>Tubing Color</b>	<b>Wire Gauge</b>	<b>Colored Stripe on Connector</b>	<b>Wire</b>	<b>Crimp Die Size</b>
Clear/Red Dashes	20-18 AWG	Side 1-Red	1-20-18 AWG	18-20
		Side 2-Blue	2 - 20-18 AWG	16-14
Clear/Blue Dashes	16-14 AWG	Side 1-Blue	1- 16-14 AWG	16-14
		Side 2-Yellow	2 - 16-14 AWG	10-12
Clear/Yellow Dashes	12-10 AWG	Side 1 - Yellow	1 - 12-10 AWG	10-12
		Side 2 - Red	2 - 12-10 AWG	8 ga

<b>Part No.</b>	<b>Wire Size</b>
17500	22-18
17501	16-14
17502	12-10

## **ESP HEAT SHRINK TUBING**

- ▶ Semi-Rigid adhesive lined for insulating and color coding, but also translucent for viewing underlying materials.
- ▶ Protects against the corrosion of Calcium Chloride.
- ▶ Wire gauge imprinted for ease of wire identification.
- ▶ 2.5 to 1 shrink ratio

<b>Part Number</b>	<b>Wire Size</b>	<b>Color</b>
17510	24-22 AWG	Clear
17511	20-18 AWG	Red
17512	16-14 AWG	Blue
17513	12-10 AWG	Yellow



# WEATHER PACK ENVIRONMENTAL CONNECTORS

## CAVITY SEALS & PLUGS

Seals and plugs are made of self lubricating silicone  
 Multiple ribs seal and against dust, moisture, fluids and chemicals  
 Cavity seals are crimped to the terminal to assure positive position of the seal in the housing cavity

Part Number	Wire Size	Color
17315	18-20	Green
17316	16-14	Gray
17317	12	Blue
17318	Cavity plug	Green



## WEATHER PACK TOOLS

17319	Terminal Extractor
17320	.050 Terminal Pick
17321	.090 Terminal Pick
17322	22 -14 Ga Crimper
17323	12 Ga Crimper



WEATHER PACK TERMINALS			
Female		Male	
	Part Number		Part Number
22-18	17325		17326
16-14	17327		17328
12	17329		17330



# WEATHER PACK ENVIRONMENTAL CONNECTORS

## CAVITY SEALS & PLUGS

Seals and plugs are made of self lubricating silicone  
 Multiple ribs seal and against dust, moisture, fluids and chemicals  
 Cavity seals are crimped to the terminal to assure positive position of the seal in the housing cavity

Part Number	Wire Size	Color
17315	18-20	Green
17316	16-14	Gray
17317	12	Blue
17318	Cavity plug	Green



## WEATHER PACK TOOLS

17319	Terminal Extractor
17320	.050 Terminal Pick
17321	.090 Terminal Pick
17322	22 -14 Ga Crimper
17323	12 Ga Crimper



## WEATHER PACK TERMINALS

Female		Male	
	Part Number		Part Number
22-18	17325		17326
16-14	17327		17328
12	17329		17330



CENTRAL IOWA FASTENERS