

Exhaust Hose Reel 865 - Electric Motor Driven

Electric Motor Driven Exhaust Hose Reel



The best solution in workshops with a high ceiling, where over-head cranes etc. have to be considered, or where high vehicles must pass. Operated via a hand unit either an IR control or pendant control. A receiving eye on the reel shows the status of operation. Electronic upper and lower limit switches reduce the risk of malfunction and unnecessary wearing of the hose. Fan start/stop is automatically controlled. Mounting of fan on reel is possible. No programming is lost when a power failure occurs. If the power is cut, the electro-magnetic brake will lock the drum instantly.

- Convenient and safe operation
- Automatic Fan for energy savings
- Quick & easy installation reduces cost
- Settings for limit switches made from floor level
- Compact, modern design

Product name	Exhaust Hose Reel 865 - Electric Motor Driven
Installation	Indoor
Material recycling (%)	100
Operating Temperature	14 - 122 F (-10 to +50 C)
Further technical data	Max lifting capacity: 30kg Power supply: 325 VA
Power Voltage (V)	100-230
Frequency (Hz)	50/60
No of phases	1
Colour	Blue



Exhaust Hose Reel 865 - Electric Motor Driven

Type of hose ¹	Delivered with hose	Body type	Diameter, hose (in)	Hose length (ft)	Weight (lbs)	Max hose length	Electric/Spring driven	Model
NR-CP	Yes	Wide body	4	25	90 - 108	41		20802965
NR-CP	Yes	Wide body	5	33	90 - 108	33		20803365
NR-CP	Yes	Wide body	6	16	90 - 108	33		20803965
Without	No	Short body	4		90 - 108	25		20809465*
Without	No	Wide body	4	33	68	41		20802665*
Without	No	Wide body	5	49	68	33		20802765*
Without	No	Wide body	6	41	68	33		20802865*
Without	No	Wide body	8		68	23		20809165**
								89299121

*Delivered without hose.

**Max hose length 22 ft coiled, Max weight of hose including nozzle 65 lbs.


¹ See table below

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
NRCP	Polyester fabric, EPDM/PP coated. Helix in Polyester with EPDM cover. Max bending radius 22.5cm (inside)	-40 to +150 Deg. C (Intermittent +170 Deg. C)				

Exhaust Hose Reel 865 - Electric Motor Driven

	Accessory	Part No
	Extraction trolley Reel on rail	20948610
	Pendant control incl. cable bracket	20373712
	Transmitter with wall bracket	20373522
	Stand for fan	20373556
	Transformer 230/250 V to 24 V. 75 VA.	10361560
	Transformer 230/250 V to 24 V. 25 VA.	10363189
	8in Clip Grip/Bridge Hose Clamp	87000934
	Flex Nozzle 6"complete w/ 9" opening	89298063
	Flex Noz 6"complt w 8"opening2007en	89298058
	Arm Bracket - 8" Exhaust Hose Reel	86900229
	Stainless Steel Nozzle for 5" hose with locking clamp & lifting sleeve	89298082
	NFC-4.2 Hose Ex 100mm/5 m	86900683

Exhaust Hose Reel 865 - Electric Motor Driven

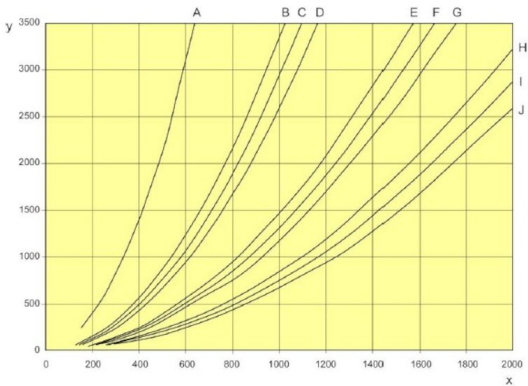

A. 75 mm (3"), 5 m (16'), B. 100 mm (4"), 10 m (33'), C. 100 mm (4"), 7.5 m (25'), D. 100 mm (4"), 5 m (16'), E. 125 mm (5"), 10 m (33'), F. 125 mm (5"), 7.5 m (25'), G. 125 mm (5"), 5 m (16'), H. 150 mm (6"), 10 m (33'), I. 150 mm (6"), 7.5 m (25'), J. 150 mm (6"), 5 m (16')

X = m³/h
Y = Pa

