




## **MACHINE SPEC SHEET**

## **D-2536L: Automatic Developing Machines**



TOP(S) REMOVED FOR CLARITY

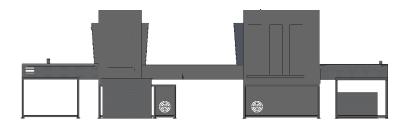

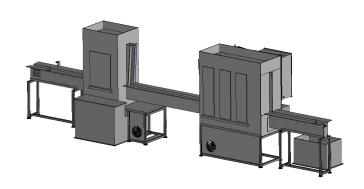



## Use:

The developer series machines provide our customers easy operation with quick start and auto-stop features. Chamber one includes a full water recirculation chamber which saves water for the customer. Chamber two features a high-pressure rinse with fresh water to ensure every detail comes out clean.

## **Manufacturers Notes:**



Installed by Bluewater Technician



Backed by 24 month parts warranty



Made and Manufactured in the USA

Machine Specs	
Infeed Length	54.0" (Included) 72.0" (Upgrade)
Outfeed Length	47.0" (Included) 94.0" (Upgrade)
Dryer	Upgrade)
Outfeed Booth	☐ 60.0" (Upgrade)
Air @ 6,9 (100PSI)	10cfm @ 100psi
Electrical	208/230V, 3ph, 34FLA, 50/60Hz (w/o dryer)
	208/230V, 3ph, 62FLA, 50/60Hz w/ dryer
Water	1 x 1" NPT Standard Fitting
Drain	3/4" or 1 1/4" NPT Utility Pump
Machine Direction	☐ Left to Right ☐ Right to Left
Screens Per Hour	75 Per Hour or (600/8hr shift)
Crate dimensions	Crate 1: 146' x 48' x 87' Crate 2: 122' x 48' x 68'
Shipping weights	Crate 1: 1900 Lbs Crate 2: 900 Lbs

\*Will vary depending on extras (chemical, tanks) ordered

Body Length	156.0"
Standard Body Width	24.0"
Body Width with Recirc	36.0"
Body Height	73.0"
Machine Length (min)	21'5"