
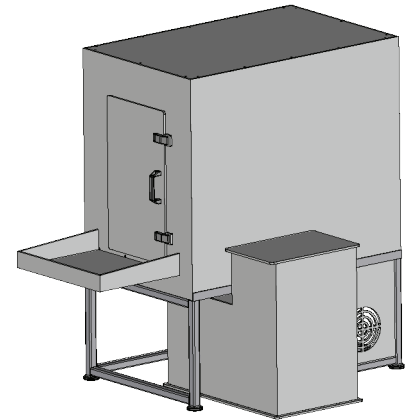


MACHINE SPEC SHEET

IR-2: Ink Removal Cleaning System

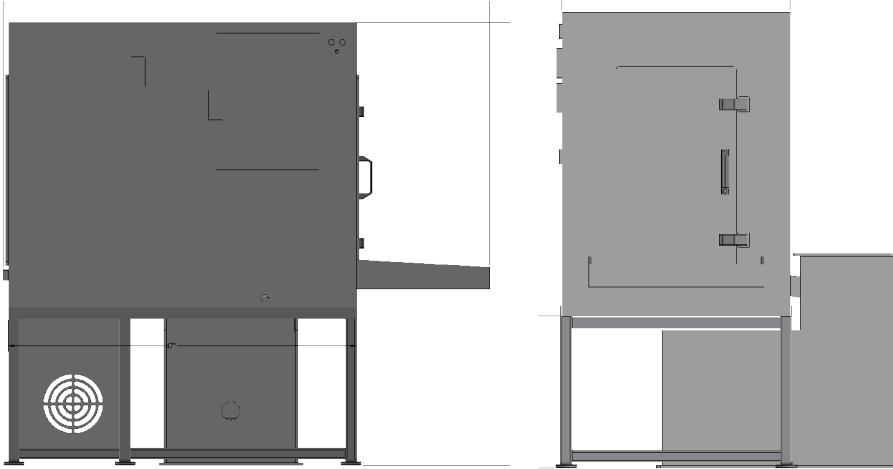

Customer Info	
Company Name	
Customer Name	
Email Address	
Phone Number	
Shipping Address	
Shipping Address	
City	
State	
Zip Code	

Machine Specs	
Air @ 6,9 (100PSI)	2cfm @ 100psi
Electrical	<input type="checkbox"/> 220 V, 1 ph, 15FLA, 50/60Hz
	<input type="checkbox"/> 208/230 V, 3ph, 8FLA, 50/60Hz
Max Frame Size	(2) - 25" x 36"
Squeegee & Floodbar Attachment	<input type="checkbox"/> Check if yes <input type="checkbox"/> 1 <input type="checkbox"/> 2
Crate dimensions	Crate 1: 86" x 48" x 68"
Shipping weights	Crate 1: 740 Lbs
*Will vary depending on extras (chemical, tanks) ordered	
Body Length	66.0"
Body Standard Width	30.0" or 45.0" w recirc. tank
Body Height	60"

Manufacturers Notes:

- ☒ Filtration System Included
- ☒ Upgraded squeegee and floodbar rack available
- ☒ Flash point of solvent must be over 140 degrees F
- ☒ Made and Manufactured in the USA

Use:

Remove ink fast and efficiently with Bluewater's IR-2 Ink Removal Machine. The IR-2 utilizes a high-pressure/high-volume multi-stage pump and three traveling spray arms that wash both sides of the screen at once, cleaning all types of ink off of your screens in under a 5-minute cleaning cycle.