
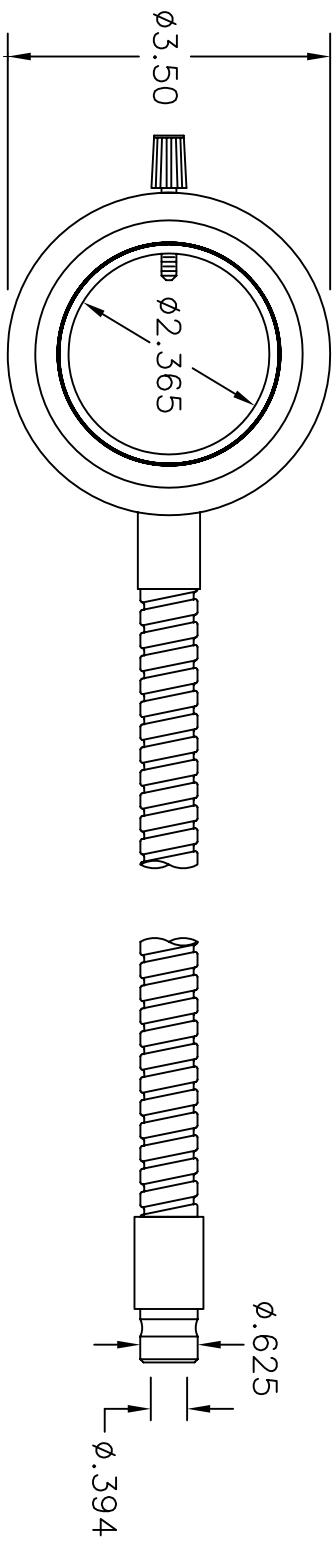


REVISIONS				
SYL	DESCRIPTION	REV BY	DATE	APPROVED
R	RELEASED	MM	3/18/92	

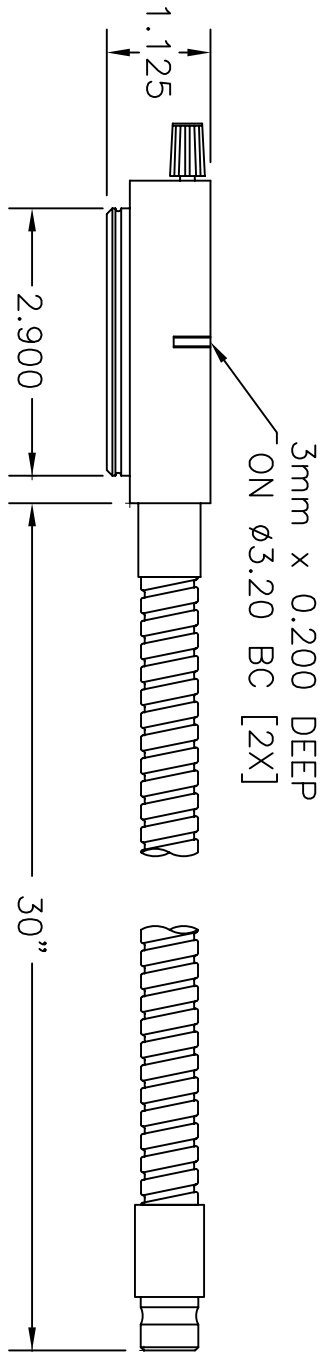

NOTES:

- 1) FIBER: GLASS, 50 MICRON, <0.7dB/m
- 2) FERRULE MATERIAL: ALUMINUM 6061
- 3) HEAD MATERIAL: ALUMINUM, 6061
- 4) FINISH: BLACK ANDIZE, HARD COAT
- 5) SHEATH: STAINLESS STEEL, INTERLOCKING
- 6) UNIFORMITY: FIBER RANDOMIZED, OUTPUT $\pm 10\%$
- 7) FIBER POTTING: HIGH TEMP 500°C

UNLESS OTHERWISE INDICATED: INTERPRET PER ANSI/ASME Y14. DIMENSIONS ARE INCHES AND DO NOT INCLUDE APPLIED FINISHES. BREAK SHARP EDGES & CORNERS .03/.01 RADIUS OR CHAMFER. GENERAL TOLERANCES: 3 PLACE DIMENSIONS: $\pm .005$ 2 PLACE DIMENSIONS: $\pm .02$ FRACTIONS: $1/64$ ANGLES: $\pm 1/2^\circ$ MACHINED SURFACES: $63\sqrt{} $		<p>Illumination Technologies, Inc. Syracuse, NY USA</p>	
THIRD ANGLE PROJECTION	DRAWING TITLE RINGLIGHT, $\phi 60\text{mm}$	DATE 3/18/92	REV A
DRAWN BY MM	DRAWING NUMBER 9021	REL DATE 3/18/92	SHEET OF 1/1
CHECKED BY	DATE	SCALE	
APPROVED BY	DATE	THIS DRAWING AND ITS CONTENTS ARE THE EXCLUSIVE PROPERTY OF ILLUMINATION TECHNOLOGIES, INC. NO REPRODUCTION OR OTHER USE OF THIS DOCUMENT IS ALLOWED WITHOUT WRITTEN PERMISSION OF ILLUMINATION TECHNOLOGIES, INC. OR ITS DULY AUTHORIZED AGENTS.	