


REVISIONS

SYM	DESCRIPTION	REV BY	DATE	APPROVED
R	RELEASED	MM	11/11/92	
A	ADD BLACK ANODIZE	MM	5/16/93	
B	MAX DIM ADDED (2)	MM	8/2/93	
C	ADD NOTES	MM	9/29/93	
D	ADD Ø.156 HOLES	MM	4/25/96	

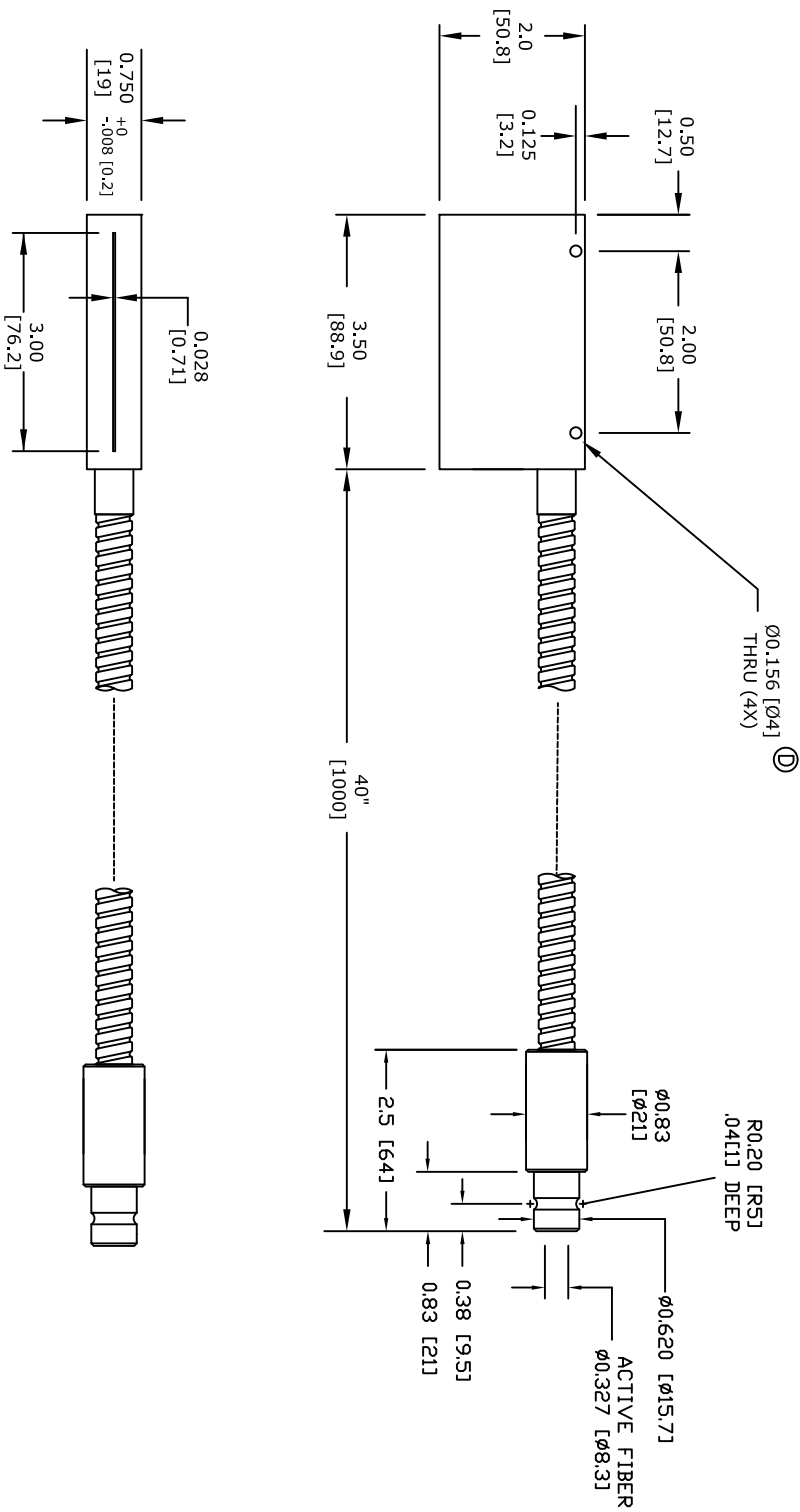

NOTES:

- 1) FIBER: GLASS, 50 MICRON, <0.7dB/m
- 2) FERRULE MATERIAL: STAINLESS STEEL, 303
- 3) HEAD MATERIAL: ALUMINUM, 6061
- 4) HEAD FINISH: BLACK ANDIZE, HARD COAT
- 5) SHEATH: STAINLESS STEEL, INTERLOCKING
- 6) UNIFORMITY: FIBER RANDOMIZED, OUTPUT ±10%
- 7) FIBER POTTING: HIGH TEMP 500°C

UNLESS OTHERWISE INDICATED:
INTERPRET PER ANSI/ASME Y14.
DIMENSIONS ARE INCHES AND DO
NOT INCLUDE APPLIED FINISHES.
BREAK SHARP EDGES & CORNERS
.03/.01 RADIUS OR CHAMFER.
GENERAL TOLERANCES:
3 PLACE DIMENSIONS: ±.005
2 PLACE DIMENSIONS: ±.02
FRACTIONS: 1/64
ANGLES: ±1/2°
MACHINED SURFACES: 63√

APPLICABLE SPECIFICATIONS:

it Illumination Technologies, Inc.
Syracuse, NY USA

THIRD ANGLE
PROJECTION

DRAWN BY: MM 11/11/92
DATE: 11/11/92

CHECKED BY: MM 11/11/92
DATE: 11/11/92

APPROVED BY: DATE:

DRAWING TITLE: LIGHTLINE, 3" x .028", SINGLE, HIGH TEMP

SIZE: DRAWING NUMBER: 9135HT

REL DATE: 11/11/92
SCALE: 1/1
SHEET OF: 1/1

REV: D

THIS DRAWING AND ITS CONTENTS ARE THE EXCLUSIVE PROPERTY OF ILLUMINATION TECHNOLOGIES, INC. IT IS PROVIDED WITH THE UNDERSTANDING THAT THE INFORMATION CONTAINED HEREIN IS FOR THE SOLE USE OF THE ADDRESSEE AND IS NOT TO BE REPRODUCED OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF ILLUMINATION TECHNOLOGIES, INC. OR ITS DULY AUTHORIZED AGENTS.