


REVISIONS

SYM	DESCRIPTION	REV BY	DATE	APPROVED
R	RELEASED	MM	11/11/92	
A	ADD BLACK ANODIZE	MM	5/16/93	
B	MAX DIM ADDED (2)	MM	8/2/93	
C	ADD NOTES	MM	9/29/93	
D	ADD Ø.156 HOLES	MM	4/25/96	

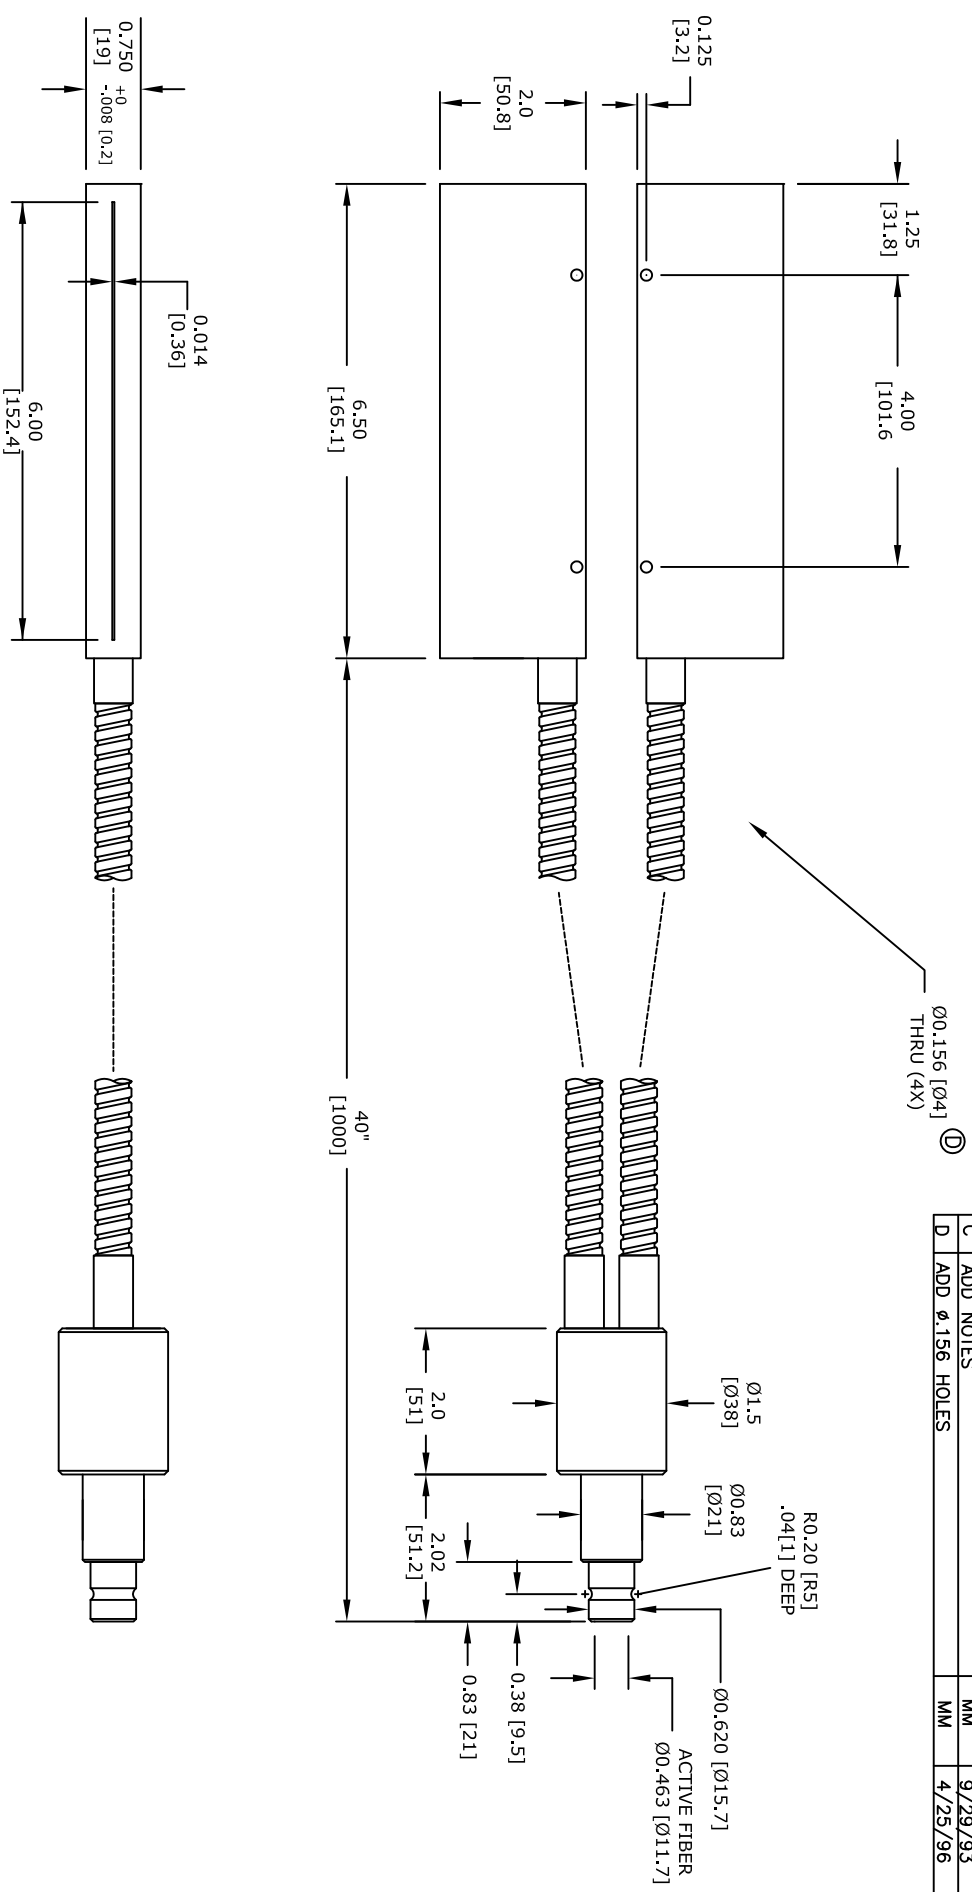

NOTES:

- 1) FIBER: GLASS, 50 MICRON, <0.7dB/m
- 2) FERRULE MATERIAL: STAINLESS STEEL, 303
- 3) HEAD MATERIAL: ALUMINUM, 6061
- 4) HEAD FINISH: BLACK ANDIZE, HARD COAT
- 5) SHEATH: STAINLESS STEEL, INTERLOCKING
- 6) UNIFORMITY: FIBER RANDOMIZED, OUTPUT ±10%
- 7) FIBER POTTING: HIGH TEMP 500°C



Illumination Technologies, Inc.
Syracuse, NY USA

UNLESS OTHERWISE INDICATED:
INTERPRET PER ANSI/ASME Y14.
DIMENSIONS ARE INCHES AND DO
NOT INCLUDE APPLIED FINISHES.
BREAK SHARP EDGES & CORNERS
.03/.01 RADIUS OR CHAMFER.
GENERAL TOLERANCES:
3 PLACE DIMENSIONS: ±.005
2 PLACE DIMENSIONS: ±.02
FRACTIONS: 1/64
ANGLES: ±1/2°
MACHINED SURFACES: 63√



DRAWING TITLE
LIGHTLINE, 6" x .014", DUAL, HIGH TEMP

9145HT

D

APPLICABLE SPECIFICATIONS:

THIRD ANGLE
PROJECTION
DRAWN BY
MM 11/11/92

APPROVED BY
DATE
11/11/92
SCALE
SHEET 1 OF 1

THIS DRAWING AND ITS CONTENTS ARE THE EXCLUSIVE PROPERTY OF ILLUMINATION TECHNOLOGIES, INC. IT IS PROVIDED WITH THE UNDERSTANDING THAT THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPRIETARY AND NO REPRODUCTION OR DISSEMINATION OF ANY KIND IS PERMITTED WITHOUT THE WRITTEN PERMISSION OF ILLUMINATION TECHNOLOGIES, INC. OR ITS DULY AUTHORIZED AGENTS.