
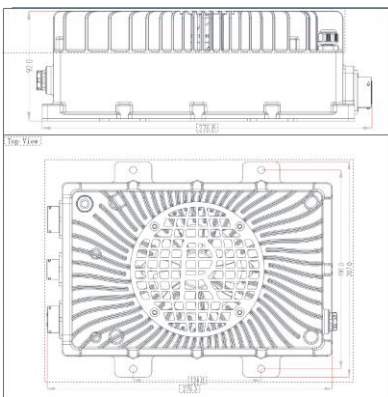


96VDC 30A On Board Charger w/Canbus 2.0

Data Sheet

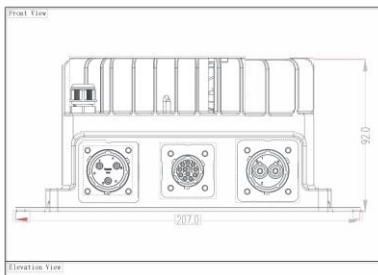

3.3kW On-Board Charger	
Model	NZ3396
Output Voltage	92-106VDC
Charging	Bi-directional
Input Voltage	220-240VAC
Frequency	50/60Hz
Inrush Current	<16A
input PF	>0.99 (@220VAC)
Output Power	3.3kW
Out Voltage Range	50-135VDC
Out Current Range	0-30A
VDC Regulation	<1%
VDC Ripple co-efficient	<1%
Current Regulation Accuracy	<5%
Efficiency	94%
Working Noise	<60dB
Working Temperature	-20-55°C
IP	67
Cooling	Fan
Communication	CAN J1939
Baud Rate	250kbps

This Data is the property of Net Zero Renewable Solutions Ltd. and for use only with Net Zero Solutions Products.