



# SPEED AND POWER

## *Signature Series*

### High-Torque SPCC Tools

---

Lightweight and programmable with a powerful brushless motor and robust 34V Lithium-Ion battery, the SPCC Series delivers some of the fastest cordless high-torque speeds available today. With a torque range of 50 - 2,500 Nm, the SPCC is powerful enough to handle even the most challenging applications at super efficient speeds.



## **MAXIMUM PRECISION**

## **MAXIMUM PRODUCTIVITY**

# Signature Series High-Torque SPCC Tools

Built to withstand the toughest environments, the Signature Series SPCC line of high-torque delivering tools are ideal for industries that require high performance and durability. Applications in Energy Production, Heavy Equipment, Trucks, and Agricultural equipment are just a sampling of where these tools work well. Engineered for speed, these tools will boost workflow, whether in a high-demand production environment or a time-sensitive repair scenario.

## FEATURES AND BENEFITS

- **High-Speed Operation:** Enables faster work times without sacrificing performance
- **Durability:** Long-lasting brushless motor requires less maintenance
- **Easy Torque Adjustment:** Quick and accurate programming through the tool's user interface. Tool includes 50 preset torque ranges
- **Seamless Data Download** to a USB flash drive by just plugging in
- **Operator-Friendly Design:**
  - Light weight reduces operator fatigue and allows greater mobility
  - LED indicator lights provide immediate visual feedback, helping operators monitor tool status at a glance.
  - Forward/Reverse press button allows quick directional changes, improving control and workflow
  - Built-in LED work light illuminates dark or conined spaces, increasing accuracy and safety
  - Li-Ion battery pack delivers longer run times, reducing downtime
- **Dual-Trigger Models Available:** These models require both hands to operate, which prevents accidental start and keeps hands safe

### Programming Interface

Easily program the tool using the interface on the back. A buzzer and LED indicator lights provide audible and visual process information.




Each tool comes with a hard-sided carrying case



Model*	Torque Range		Free Speed RPM	Weight (w/o Battery)		Anvil Size	Noise Level dB(A)	Dimensions									
	Nm	FT-LB		LB	KG			B		C		D		E			
SPCC-P25050 (DL)	50-250	37-184	75-700	6.4	2.9	1/2" Sq. Dr.	<80	11.5	29.1	1.4	36	10.2	258	35	90	2.3	58
SPCC-P55075 (DL)	110-550	81-406	33-170	7.7	3.5	3/4" Sq. Dr.	<80	12.4	31.4	2	50	10.2	260	51	130	2.4	60
SPCC-P90075 (DL)	180-900	133-664	15-88	9	4.1	3/4" Sq. Dr.	<80	12.6	31.9	2.1	54	10.4	265	57	145	2.7	68.5
SPCC-P120075 (DL)	240-1,200	177-885	15-88	11	5	3/4" Sq. Dr.	<80	12.7	32.2	2.1	54	10.6	269	57	145	3.2	82
SPCC-P15001 (DL)	300-1,500	221-1,106	9-45	13.7	6.2	1" Sq. Dr.	<80	14	35.5	2.8	70	10.7	273	67	170	3.2	82
SPCC-P25001 (DL)	500-2,500	369-1,844	5-35	14.6	6.6	1" Sq. Dr.	<80	14.5	36.8	2.8	70	10.7	273	67	170	3.2	82

\* Includes one (1) Tool, one (1) Li-Ion Battery, one (1) Standard Offset Reaction Bar, and a carrying case.  
DL= Dual trigger models

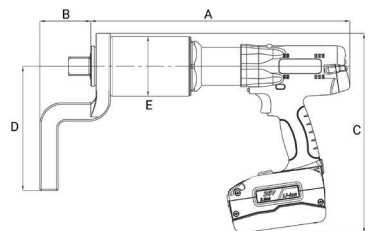

## BATTERIES AND BATTERY CHARGER



Battery Model	Voltage	Type	Capacity	Weight	Size	Charging Time
SPCC-B36-2.5	36V	Li-Ion	25Ah	.75Lb / .34kg	117(L) x 77(W) x 67(H) mm 4.6(L) x 3(W) x 2.6(in)	40 min
SPCC-B36-5.0	36V	Li-Ion	50Ah	1.21Lb / .55kg	134(L) x 88(W) x 76(H) mm 5.3(L) x 3.5(W) x 3(H) in	80 min

Charger Model	Output	Input	Weight
SPCC-C42	42V for 36V Batteries	100-240VAC / 50-60 Hz	1.8Lb / .83kg

## STEEL REACTION BARS

Reaction Bar	Model	Used for Tool Models
<b>Standard Offset Reaction Bar - Included with Tool</b>		
	SPCC-250RB	SPCC-P25050
	SPCC-550RB	SPCC-P55075
	SPCC-900-1200RB	SPCC-P90075 SPCC-P120075
	SPCC-1500-2500RB	SPCC-P15001 SPCC-P25001
<b>Sliding Reaction Bar - Available for additional purchase</b>		
	SPCC-250RBSL	SPCC-P25050
	SPCC-550RBSL	SPCC-P55075
	SPCC-900-1200RBSL	SPCC-P90075 SPCC-P120075
	SPCC-1500-2500RBSL	SPCC-P15001 SPCC-P25001