

CHCNAV



**M6**

—  
**Survey & Engineering**

Make your work more efficient


# Core Technology

## M6 Network Rover

### Pro Series

The M6 GNSS receiver is a new-generation high-end GNSS network receiver designed for RTK field survey work. Designed for RTK network corrections, the M6 receiver is easy-to-use in any construction sites.


Harnessing the latest generation of GNSS engine, the M6 achieves state of the art signal tracking and processing of multi-constellation GPS, GLONASS, BeiDou and Galileo, ensuring outstanding precision even in the most difficult environments.

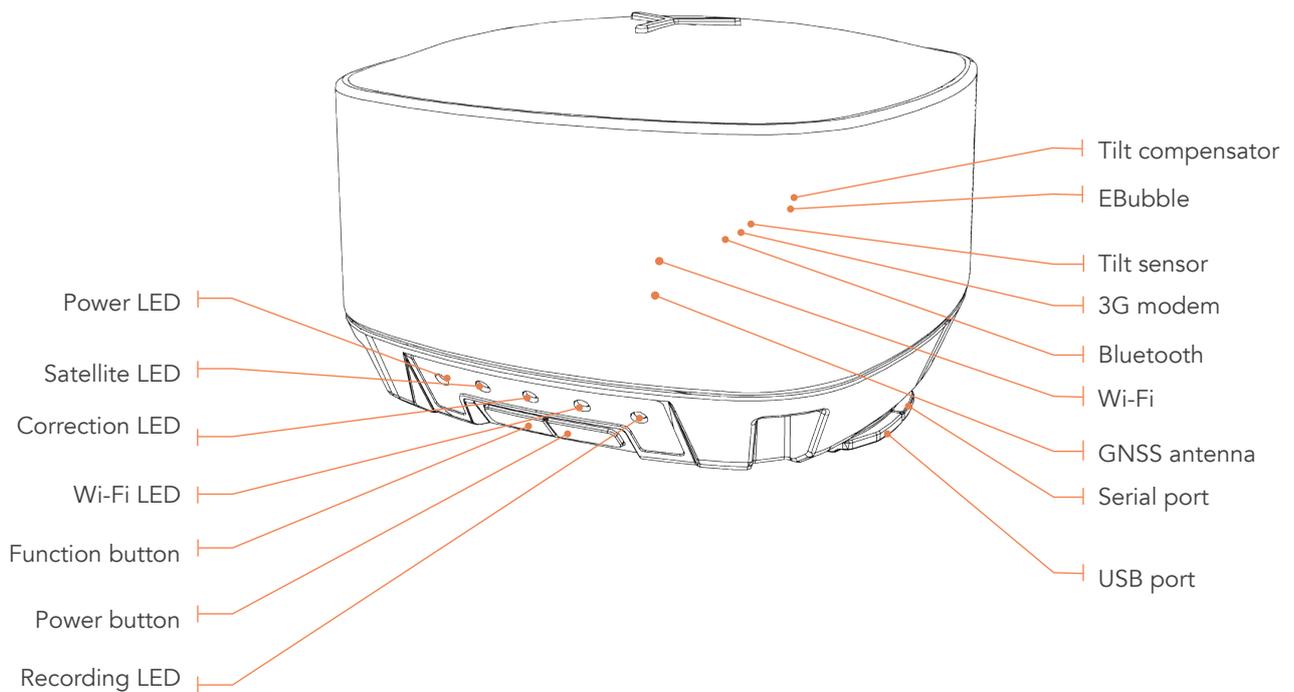

# Core Technology

## Network Rover

The M6 receiver is optimized for RTK surveying using NTRIP Network corrections.

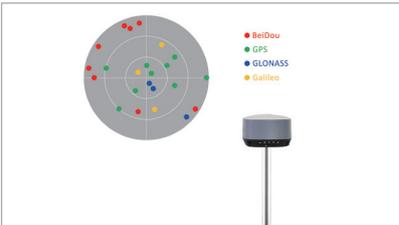


## 220 Channels Multi-constellation

Fully supports the tracking of GPS, GLONASS, Galileo, BeiDou and SBAS satellite signals.

## Compact

Extremely compact and lightweight for intensive field operations.

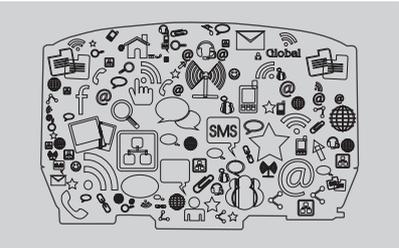

## Easy Set Up without Software

The intelligent embedded Linux operating system enables the receiver to be configured via a website from any smart devices. This eliminates the need for software or dedicated data collect to control the receiver.

## Rugged Design

The rugged and durable design meets the IP67 environmental standard for water and dust. The M6 can survive a 2 m drop onto concrete.



## Applications



# Specifications

## GNSS Satellite Tracking

<b>CHANNELS</b>	220
<b>GPS</b>	L1C/A, L1C, L2C, L2E, L5
<b>GLONASS</b>	L1C/A, L1P, L2C/A, L2P, L3
<b>GALILEO</b>	E1, E5A, E5B
<b>BDS</b>	B1, B2
<b>SBAS</b>	L1C/A, L5 (QZSS, WAAS, EGNOS, GAGAN)

## Positioning Accuracies<sup>(1)</sup>

<b>Network RTK</b>	Horizontal: 8 mm + 0.5 ppm RMS Vertical: 15 mm + 0.5 ppm RMS Initialisation Time: < 10 s Initialisation Reliability: > 99.9%
<b>Real time kinematics(RTK)</b>	Horizontal: 8 mm + 1 ppm RMS Vertical: 15 mm + 1 ppm RMS Initialisation Time: < 5 s Initialisation Reliability: > 99.9%
<b>Post-processing kinematic (PPK)</b>	Horizontal: 8 mm + 1 ppm RMS Vertical: 15 mm + 1 ppm RMS
<b>Post-processing static</b>	Horizontal: 2.5 mm + 0.5 ppm RMS Vertical: 3.5 mm + 0.5 ppm RMS
<b>SBAS</b>	0.5 m RMS

## Mechanical

<b>Size (H x W)</b>	83 mm x 127 mm (3.3 in x 5 in)
<b>Weight</b>	0.93 kg (2.1 lb) 1.04 kg (2.3 lb) with battery
<b>Environment</b>	Operating: -40°C to +65 °C (-40°F to +149°F) Storage: -40°C to +85°C (-40°F to +185°F)
<b>Humidity</b>	100% condensation
<b>Dust and water proof</b>	IP67
<b>Shock and vibration</b>	2 m (6.56 ft) fall onto concrete, MIL-STD-810G, Method 514.7
<b>Tilt sensor</b>	EBubble Tilt compensator <sup>(2)</sup>

## Communications and Data Recording

<b>Network modem</b>	Integrated 3.75G modem HSPA+ 21 Mbps (download), 5.76 Mbps (upload) WCDMA 850/900/1700/1900/2100 EDGE/GPRS/GSM 850/900/1800/1900
<b>WiFi</b>	802.11 b/g/n, access point mode
<b>Bluetooth®</b>	V4.1
<b>Ports</b>	2 x 7pin LEMO port (external power, data download, firmware update)

## Electrical

<b>Power consumption</b>	3.2 W (depending on user settings)
<b>Li-ion battery capacity</b>	3400 mAh, 7.4 V
<b>Operating time<sup>(3)</sup></b>	Up to 6 h in RTK rover mode
<b>External power input</b>	12 V DC to 36 V DC

\*Specifications are subject to change without notice.

(1) Accuracy and reliability specifications may be affected by multipath, satellite geometry and atmospheric conditions. Performances assume the minimum of 5 satellites, follow up of recommended general GPS practices.

(2) The accuracy of tilt compensator varies with operating environment and electromagnetic pollution.

(3) Operating time varies based on temperature.



© 2018 Shanghai Huace Navigation Technology Ltd. All rights reserved.  
The Bluetooth® world mark and logos are owned by Bluetooth SIG, Inc.  
The CHC and CHC logo are trademarks of Shanghai Huace Navigation Technology Limited.

All other trademarks are the property of their respective owners

– Revision August 2018

Shanghai Huace Navigation Technology Ltd.

599 Gaojing Road, Building D  
Shanghai, 201702, China

+86 21 54260273 WWW.CHCNAV.COM

