

Air Dryer Suppliers, Inc. Filter Housings

BF SERIES

**ADS BF Series ASME (U or UM)
Single and Multi-round Bag Vessels
Accommodate High Flow Rates &
High Particulate Retention**

APPLICATIONS

Water

Food & Beverage

Oil

Cutting Oils

Lubricants

Chemicals

Solvents

Electronics

Inks/Paints/Coatings


Pulp & Paper




Designed to handle flow rates of up to 1,120 gpm (4,240 lpm), the ADS BF Series bag and strainer filter vessels provide excellent filtration in a wide range of industrial and chemical applications. All aspects of design, materials, construction and workmanship of the BF Vessel Series conform to ASME code. (Also available in non-ASME code design and construction.)

BENEFITS


- Accepts standard #1 and #2 size bag filters
- Built in accordance with ASME (U or UM stamp) Boiler and Pressure vessel code
- Non-code design and construction (parallel code standards)
- Standard design pressure is 150 psi (10.3 bar) or 300 psi (20.7 bar)
- Available in carbon steel, 304 or 316L stainless steel
- Single O-ring seal closure design assures quick, positive cover seal
- Swing bolts with hex nuts for easy closure
- Buna-N standard O-ring with optional Viton®, Neoprene, EPDM and fluoropolymer elastomers available
- Positive bag media seal prior to sealing vessel
- Stainless steel perforated basket
- Other materials available

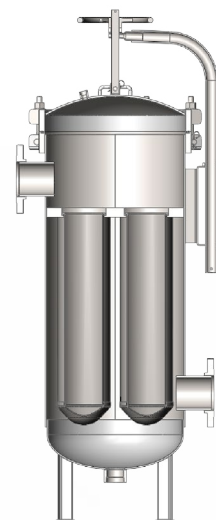

BF

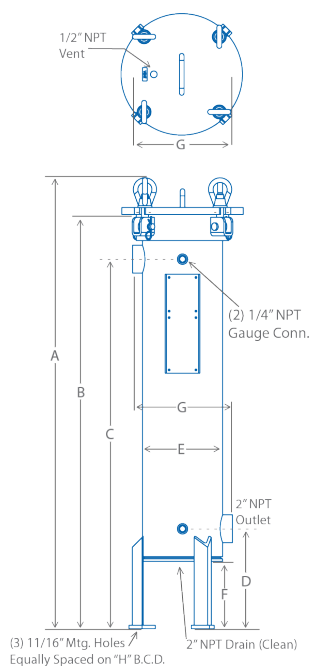

BF11, BF12

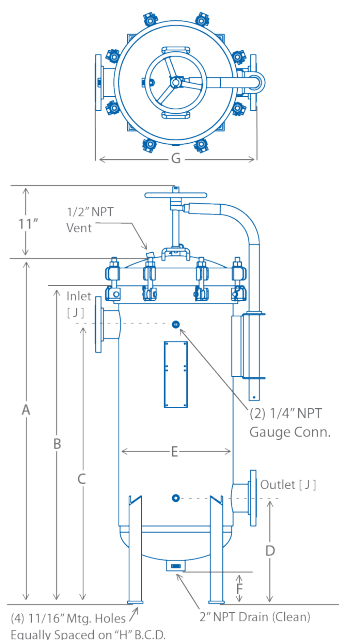

BF25 & ABOVE

MAX DESIGN TEMPS	
CARBON STEEL	500°F (260°C)
304 SST	300°F (150°C)
316 SST	400°F (204°C)
GASKET	250°F (121°C)

CLOSURE O-RING GUIDE	
MATERIAL	MAX TEMP
NITRILE (BUNA-N)**	250°F (121°C)
EPDM (EPR)	300°F (149°C)
FKM (VITON®)	400°F (204°C)

**NITRILE O-ring is standard

Note: ADS also offers non-code bag filter vessels. For more information, please refer to the 4NBF datasheet.

MODEL	MAXIMUM FLOW* (gpm)	DIMENSIONS (in.)									SHIPPING WEIGHT (lbs)
		A	B	C	D	E	F	G	H	J	
BF11-2	80	34.88	30.69	26.75	10.75	8.63	7.31	10.75	7.81	2.00	180
BF11-2F	80	34.88	30.69	26.75	10.75	8.63	7.31	14.88	7.81	2.00	180
BF12-2	160	47.88	43.69	39.75	10.75	8.63	7.31	10.75	7.81	2.00	200
BF12-2F	160	47.88	43.69	39.75	10.75	8.63	7.31	14.88	7.81	2.00	200
BF12-3F	160	48.81	44.63	40.00	10.75	8.63	7.31	16.00	7.81	2.00	220
BF31-3FK1	240	43.00	38.25	32.00	17.00	18.44	6.00	26.00	17.75	3.00	600
BF32-4FK1	480	56.00	51.25	45.00	17.00	18.44	6.00	26.00	17.75	4.00	650
BF41-4FK1	320	43.50	38.63	32.00	17.00	20.44	6.00	28.00	19.79	4.00	670
BF42-4FK1	640	56.50	51.63	45.00	17.00	20.44	6.00	28.00	19.79	4.00	720
BF42-6FK1	640	60.19	55.13	47.00	18.00	20.44	6.00	30.00	19.79	6.00	740
BF52-6FK1	800	60.50	54.50	45.00	20.00	22.44	6.00	30.00	21.71	6.00	700
BF62-8FK1	960	64.00	58.00	48.00	22.00	26.00	5.00	36.00	25.30	8.00	1105
BF72-6FK1	1120	59.75	53.75	45.00	20.00	26.00	5.00	34.00	25.30	6.00	1070
BF72-8FK1	1120	64.00	58.00	48.00	22.00	26.00	5.00	36.00	25.30	8.00	1105
BF82-8FK1	1440	64.56	58.00	48.00	23.25	28.44	5.00	38.00	27.88	8.00	1180
BF92-8FK1	1440	66.75	60.00	50.00	24.00	30.56	6.00	40.00	29.80	8.00	1180

*Actual flow rate is dependent on fluid viscosity, micron rating, contaminant and media type. Consult flow charts for each application.

ORDERING INFORMATION

				BF				-			-						
MATERIAL		DESIGN SERIES		BAG FILTER SERIES		# OF COLUMNS	BAG LENGTH		INLET / OUTLET		CONNECTION TYPE		COVER LIFT				
OMIT	CARBON STEEL	OMIT	ASME / 150 psig	BF	1 BAG OR MULTIPLE BAGS	1	1	16.5 in.	2	2 in.	OMIT	NPT	OMIT	NO COVER LIFT			
4	304 SST	H	ASME / 300 psig			3	2	32 in.	3	3 in.	F	ANSI SORF	K1	MECHANICAL			
6	316 SST	N	Non-ASME			4		4	4 in.	6	6 in.			K2	HYDRAULIC		
						5		6		8	8 in.						
						6		7									
						8		9									



1626 Wind Chase Drive
Talbott, TN 37877
P: 865-415-7478 P: 865-415-7317
www.airdryersuppliers.com