


# Commercial Weed Stopper

Weed Control • Filter Fabric • Soil Separator

2 oz. Spunbond

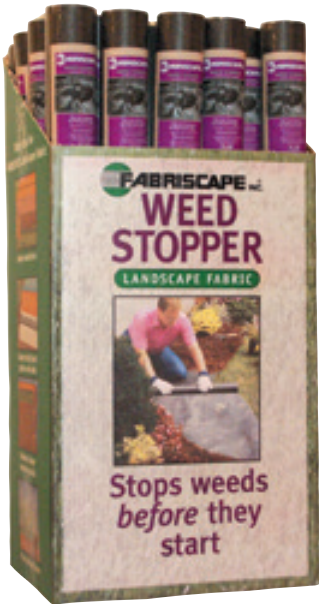

This high-strength spunbond fabric is made from polypropylene fibers that give it an excellent strength to weight ratio. Perfect for contractors and homeowners, which makes this our best selling fabric. Weedstopper Landscape fabric out performs what the chainstore / bigbox retailers sell.

Be aware of cheap substitutes with inferior strength. Using substandard fabrics can jeopardize the quality of your landscape and will cost you money and time when the job has to be redone.



## WEED CONTROL FABRIC

- Stops approx. 95% of weed growth
- Lets air, water and fertilizer pass through to plant roots
- Saves you time (no more weeding)
- Permanent when covered from sunlight

## FILTER FABRIC

- Wrap around pipe or use behind retaining walls
- Protects native soil and silt from clogging drainage septic systems
- Drainage protection to maintain flow and percolation
- Prolongs life of septic drain fields and drainage pipes

## BENEFITS

- Cuts quickly, no fraying
- Easy to install
- Retains Soil Moisture
- Available in variety of retail and bulk sizes
- Permanent when covered from sunlight

## USE UNDER OR AROUND

- Wooden Decks
- Decorative Stone & Bark
- Retaining Wall Filter Fabric
- Drainage and Septic Systems
- Annual Vegetable Gardens



## AVAILABLE SIZES

### Retail Cases

3 x 25	30 per case	42#*
3 x 50	20 per case	45#*
3 x 100	12 per case	55#*
4 x 50	12 per case	43#*
4 x 100	9 per case	50#*
6 x 50	12 per case	55#*

### Bulk Rolls

3 x 250	750 sq. ft.	13#*
4 x 250	1000 sq. ft.	18#*
5 x 250	1250 sq. ft.	22#*
6 x 250	1500 sq. ft.	26#*
8 x 250	2000 sq. ft.	35#*
10 x 250	2500 sq. ft.	43#*
12 x 250	3000 sq. ft.	52#*
15 x 250	3750 sq. ft.	66#*

\* Roll sizes & weights may vary.  
For best results the use of a pre and post emergent herbicide is advised.

\* Refer to page 18 for installation instructions

## TYPICAL SPECIFICATIONS

Properties	Test Method	2 oz.
Unit Weight (oz/yd <sup>2</sup> )	ASTM D-3776	2.0
Tensile Strength (lbs)	ASTM D-4632	73
Elongation at Break (%)	ASTM D-4632	>70
Puncture Strength (lbs)	ASTM D-4751	23
A.O.S. (equivalent sieve)	ASTM D-4751	30/40
A.O.S. (mm)		.52
Trap Tear (lbs)	ASTM D-4533	35
Coefficient of		
Permeability (cm/sec)	ASTM D-4491	7 x 10 <sup>-2</sup>
Flux (gal/ft <sup>2</sup> /min)	ASTM D-4491	200
Permittivity (sec <sup>-1</sup> )	ASTM D-4491	3.0
Thickness (mils)	ASTM D-1777	11.5
Material		Polypropylene



6410 W. 74TH ST., UNIT D • BEDFORD PARK, IL 60638  
(708) 728-7180 • 1-800-992-0550 • FAX: (708) 728-0482  
www.fabriscape.com • e-mail: info@fabriscape.com