


Professional Landscape Fabric

Weed Control • Patio/Paver Underliner • Filter Fabric • Soil Separator

3 oz. Spunbond



ACTUAL SIZE FABRIC

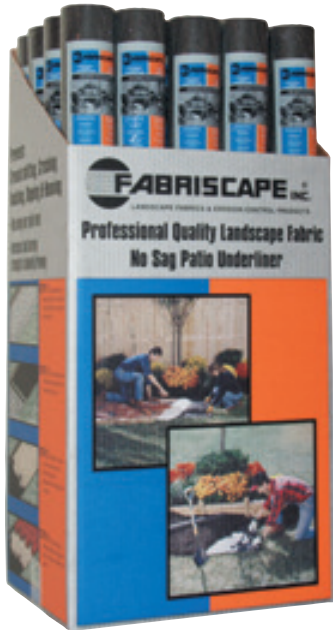

The fabric choice of professional landscapers!

This heavy duty polypropylene spunbond fabric features a high tensile strength rating which allows it to maintain the heaviest loads and does not allow weeds to penetrate. The long-term, high quality design of this fabric will ensure you do the job right the first time. This professional grade fabric is the best product in the industry for your money, and yet is easy to handle and install.



NO SAG PATIO/PAVER UNDERLINER

- Sand or aggregate won't sink into and intermix with soil
- Aggregate or sand base thickness can be reduced
- Prevents ground shifting, cracking, buckling and heaving
- Increases life of patio & driveway



WEED CONTROL FABRIC

- Stops approx. 95% of weed growth
- Lets air, water and fertilizer pass through to plant roots
- Saves you time (no more weeding)
- Permanent when covered from sunlight

BENEFITS

- High strength to withstand heavy traffic
- Gives professional edge, available in retail & bulk
- Retains Soil Moisture
- Cuts quickly, no fraying
- Easy to install
- Permanent when covered from sunlight

AVAILABLE SIZES

Retail Cases

3 x 25	30 per case	65#*
3 x 50	20 per case	69#*
3 x 100	10 per case	69#*
4 x 50	12 per case	70#*
4 x 100	6 per case	70#*

Bulk Rolls


3 x 250	750 sq. ft.	20#*
4 x 250	1000 sq. ft.	28#*
5 x 250	1250 sq. ft.	35#*
6 x 250	1500 sq. ft.	41#*
8 x 250	2000 sq. ft.	55#*
10 x 250	2500 sq. ft.	68#*
12 x 250	3000 sq. ft.	78#*
15 x 250	3750 sq. ft.	98#*

* Roll sizes & weights may vary.
For best results the use of a pre and post emergent herbicide is advised.

* Refer to page 18 for installation instructions

FILTER FABRIC

- Protects native soil and silt from clogging drainage septic systems
- Drainage protection to maintain flow and percolation
- Prolongs life of septic drain fields and drainage pipes
- Proven alternative to graded aggregate or sand filters



USE UNDER OR AROUND

- Patio Blocks & Pavers
- Decorative Stone & Bark
- Retaining Wall Filter Fabric
- Drainage and Septic Systems
- Sand

TYPICAL SPECIFICATIONS

Properties	Test Method	3 oz.
Unit Weight (oz/yd ²)	ASTM D-3776	3.0
Tensile Strength (lbs)	ASTM D-4632	135
Elongation at Break (%)	ASTM D-4632	>70
Puncture Strength (lbs)	ASTM D-4751	35
A.O.S. (equivalent sieve)	ASTM D-4751	60/70
A.O.S. (mm)		.24
Trap Tear (lbs)	ASTM D-4533	50
Coefficient of		
Permeability (cm/sec)	ASTM D-4491	3 x 10 ⁻²
Flux (gal/ft ² /min)	ASTM D-4491	70
Permittivity (sec ⁻¹)	ASTM D-4491	1.3
Thickness (mils)	ASTM D-1777	15
Material		Polypropylene



6410 W. 74TH ST., UNIT D • BEDFORD PARK, IL 60638
(708) 728-7180 • 1-800-992-0550 • FAX: (708) 728-0482
www.fabriscape.com • e-mail: info@fabriscape.com