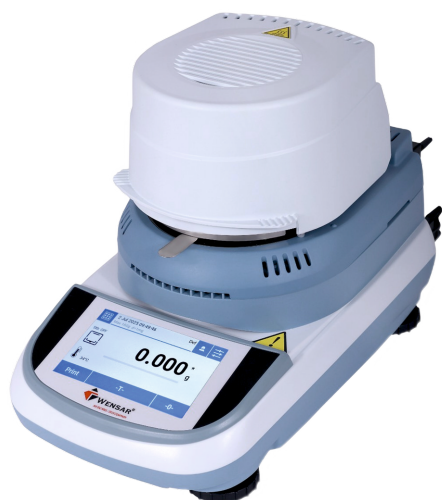


**Moisture Analyzer
LMB17T**



160g/ 1mg

Moisture Analyzer - Touch Screen


LMB17T

SALIENT FEATURES


- Multi user Password Protection
- 5" Touch Screen 800×480 colour display
- Halogen lamp, Date & Time
- GLP / ISO record of last stored Calibration data
- Two heating Mode - Standard and Rapid
- Temperature Range : 40°C -160°C
- Temperature Profiles: Standard, fast, mild, steps
- Database stored with more than 30 products
- Test reports and drying graphic up to 3000 records, for each user
- Live Graph of humidity content changing
- Rapid Key Operation, Sample preheating
- Loadcell Base, Unit - g, mg,



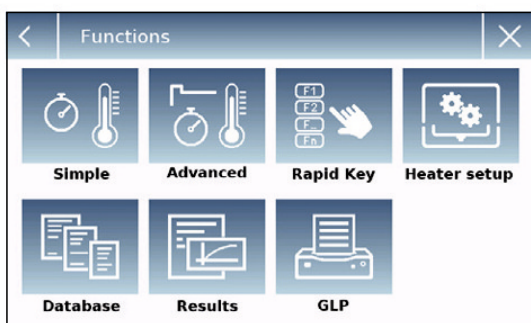E - Catalogue




Main functions page for easy working

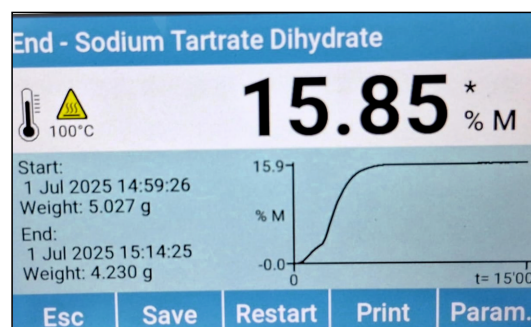

Drying cycle page with graph, with parameters



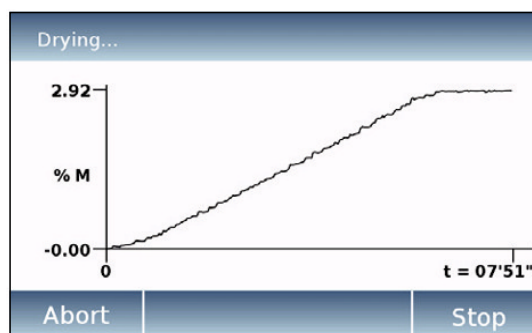Internal database of products/processes



Real time Live Graph View, full screen

Moisture Analyzer - Touch Screen

HSN Code - 90160010










SPECIFICATIONS

MODEL	LMB17T
Make	WENSAR
Capacity	160g
Readability	0.001g (1mg)
Repeatability	0.001g (1mg)
Linearity	0.002g
Display	5" Touch Screen Colour Display
Display Results	Moisture % , Dry residue % , ATRO, Weight
Printout Of Results	Date, Time, Instrument ID, User ID, Project ID, Temp., Mode, Moisture % ,Signature
Pan Size	100mm
Sensor	Loadcell
Calibration	External
Operating Temperature	5°C - 35°C
Heating Source	Halogen Lamp
Interface	RS232C, USB
Temperature Profiles	Standard and Rapid
Temperature Setting	40°C-160°C
Temp. Step	1°C
Time Setting	Time (1-99min) / Autostop
Dry Readability	0.01%
Memory	3000
Database	30 Products
Rapid Key	10 Key
Power Supply	AC 220V / 50-60 Hz
Dimension (LxWXH)	345 x 215 x 235 mm
Net Weight	4.7 kg
Gross Weight	6.5 Kg









★ Specifications are subject to change without notice.

STANDARD ACCESSORIES : Main Instrument, Aluminium PAN (10Pcs.), PAN Supporter, Power Cable, Instruction Manual, Test Certificate.

WENSAR Product Range 2025-26

TAB9T  102/220g - 0.01/0.1mg	TAB10T  81/220g - 0.01/0.1mg	KAB10L  61g/0.01mg	KAB4L, 7L  82/220g, 102/220g - 0.01/0.1mg	KAB8L, 9L  51/220g, 100/120g - 0.01/0.1mg
KAB2L  220g / 0.1mg	KAB5L, 6L  220, 320g / 0.1mg	TAB1T  220g/0.1mg	TAB2T, 3T  220, 320g / 0.1mg	TAB5T  220g / 0.1mg
EMB11  Moisture Analyzer	LMB1, LMB1IR  Moisture Analyzer (Halogen / IR)	LMB16  Moisture Analyzer	LMB17T  Moisture Analyzer	LMB20  Moisture Analyzer
EPB6T, 7T, 8T  220g, 520g, 1020g / 0.001g	EPB3000  3200g / 0.01g	IZ540A, IZ540E  Ionizer	LPB1GSM  Digital GSM Meter	PGB201D  220g / 0.001g - Density Balance
PGB200, PGB301  200g, 300g / 0.001g	LPB21, 22  200g, 300g / 0.001g	LPB23  200g / 0.001g	PGB220, 321  220g, 330g / 0.001g	LPB25T, 26T  220g, 320g / 0.001g

WENSAR Product Range 2025-26

PGB211M  220g/0.001g	PGB600, 1000  600g, 1000g / 0.01g	PGB630  600g / 0.01g	PGB3010, 6000  3000g/0.01g, 6000g/0.1g	PGB3110, 6100  3000g/0.01g, 6000g/0.1g
LPB24  3000g / 0.01g	PGB5010M  5000g / 0.01g	PGB610  600g / 0.01g	PGB1200  1200g / 0.01g (Price Calculation)	PGB1210  1200g / 0.01g
PGB3001  3000g / 0.01g	TTB30M  30kg / 0.1g	TTB3, 15, 31  3kg/0.1g, 15kg/0.5g, 30kg/1g	TTB20HH  20kg / 0.1g	TTB52  50kg / 2g
PFB101H  100kg / 1g	PFB60, 100, 300  60kg/5g, 100kg/10g, 300kg/20g	WDK200 - 205 WDK250  Density Kit	TP1, TP2, TP3, TP4  Thermal Printer	DP5 to DP18  Dotmatrix Printer
AVP304SS, AVP100  Anti Vibration Pad	EDP10, 20, 30  Extra Display	E1 Standard Weights  E1 Class - Standard Weights	E2 Standard Weights  E2 Class - Standard Weights	F1 Standard Weights  F1 Class - Standard Weights