



Moisture Analyzer LMB16





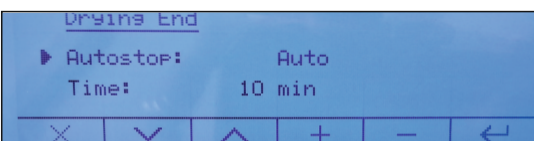
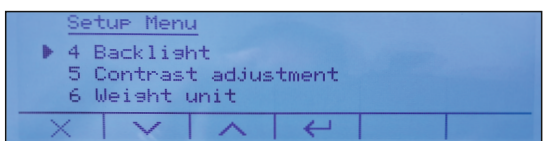
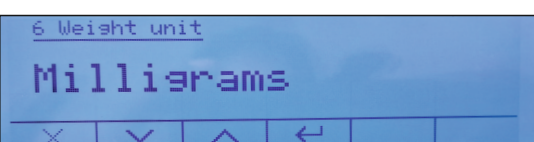

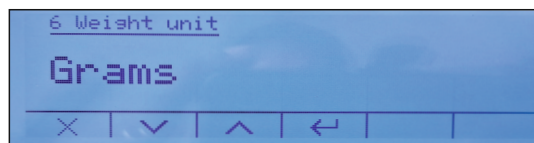
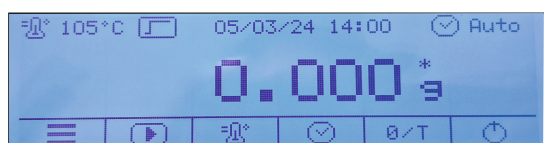
160g/ 1mg

MOISTURE ANALYZER**LMB16****SALIENT FEATURES**

- ✦ Halogen Heating System
- ✦ Large Graphic Display
- ✦ GLP/ ISO record of last stored calibration data
- ✦ Two heating modes: Standard and Rapid
- ✦ Temperature Range: 40°C -160°C/1°C
- ✦ RS232C Interface
- ✦ Multi language
- ✦ Pre-heating on/off
- ✦ Loadcell Based, Unit- g, mg
- ✦ Date and Time



E - Catalogue



11/03/24 13:40:47

Balance ID
LMB16User ID
PARASProject ID
Sodium Tartrate DihydrateStandard 105°C
Autostop 12Min11/03/24 13:46:02
W.Start 5.000g11/03/24 14:01:02
W.End 4.217gMoist. 15.66% M
Signature

Moisture Analyzer

HSN Code - 90160010







SPECIFICATIONS

MODEL	LMB16
Make	WENSAR
Capacity	160g
Readability	0.001g (1mg)
Repeatability	0.001g (1mg)
Linearity (±)	0.002g
Display	Graphic Display with back light
Display Results	Moisture % , Dry residue % , ATRO, Weight
Printout Of Results	Date, Time, Instrument ID, User ID, Project ID, Temp., Mode, Moisture % ,Signature
Pan Size	100mm
Sensor	Loadcell
Calibration	Automatic External
Operating Temperature	5°C - 35°C
Heating Source	Halogen Lamp
Interface	RS232C
Temperature Profiles	Standard and Rapid
Temperature Setting	40°C-160°C
Temp. Step	1°C
Time Setting	Time (1-99min) / Autostop
Dry Readability	0.01%
Aluminium Sample PAN	10pcs.
Power Supply	AC 220V / 50-60 Hz
Dimension (LxWXH)	455 x 290 x 395 mm
Net Weight	4.7kg
Gross Weight	6kg









★ Specifications are subject to change without notice.

STANDARD ACCESSORIES : Main Instrument, Aluminium PAN, Dust Plate, PAN Handle, PAN Supporter, Power Cable, Instructional Manual, Test Certificate.

WENSAR Product Range 2025-26

TAB9T  102/220g - 0.01/0.1mg	TAB10T  81/220g - 0.01/0.1mg	KAB10L  61g/0.01mg	KAB4L, 7L  82/220g, 102/220g - 0.01/0.1mg	KAB8L, 9L  51/220g, 100/120g - 0.01/0.1mg
KAB2L  220g / 0.1mg	KAB5L, 6L  220, 320g / 0.1mg	TAB1T  220g/0.1mg	TAB2T, 3T  220, 320g / 0.1mg	TAB5T  220g / 0.1mg
EMB11  Moisture Analyzer	LMB1, LMB1IR  Moisture Analyzer (Halogen / IR)	LMB16  Moisture Analyzer	LMB17T  Moisture Analyzer	LMB20  Moisture Analyzer
EPB6T, 7T, 8T  220g, 520g, 1020g / 0.001g	EPB3000  3200g / 0.01g	IZ540A, IZ540E  Ionizer	LPB1GSM  Digital GSM Meter	PGB201D  220g / 0.001g - Density Balance
PGB200, PGB301  200g, 300g / 0.001g	LPB21, 22  200g, 300g / 0.001g	LPB23  200g / 0.001g	PGB220, 321  220g, 330g / 0.001g	LPB25T, 26T  220g, 320g / 0.001g

WENSAR Product Range 2025-26

PGB211M  220g/0.001g	PGB600, 1000  600g, 1000g / 0.01g	PGB630  600g / 0.01g	PGB3010, 6000  3000g/0.01g, 6000g/0.1g	PGB3110, 6100  3000g/0.01g, 6000g/0.1g
LPB24  3000g / 0.01g	PGB5010M  5000g / 0.01g	PGB610  600g / 0.01g	PGB1200  1200g / 0.01g (Price Calculation)	PGB1210  1200g / 0.01g
PGB3001  3000g / 0.01g	TTB30M  30kg / 0.1g	TTB3, 15, 31  3kg/0.1g, 15kg/0.5g, 30kg/1g	TTB20HH  20kg / 0.1g	TTB52  50kg / 2g
PFB101H  100kg / 1g	PFB60, 100, 300  60kg/5g, 100kg/10g, 300kg/20g	WDK200 - 205 WDK250  Density Kit	TP1, TP2, TP3, TP4  Thermal Printer	DP5 to DP18  Dotmatrix Printer
AVP304SS, AVP100  Anti Vibration Pad	EDP10, 20, 30  Extra Display	E1 Standard Weights  E1 Class - Standard Weights	E2 Standard Weights  E2 Class - Standard Weights	F1 Standard Weights  F1 Class - Standard Weights