

Moisture Analyzer LMB20



SALIENT FEATURES

- Capacity - 210g/1mg
- Loadcell Sensor
- 7 inches Display
- Halogen Heating System
- Temperature Range up to 200°C
- RS232C Interface
- The mode for testing Automatic
- Timing, Manual
- Wireless Indicator with Rechargeable Battery backup
- Auto chamber open/ close Function
- GLP Compliance

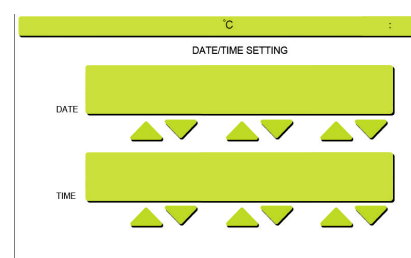
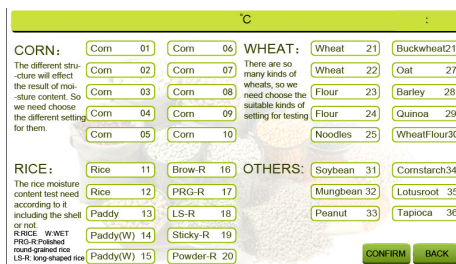
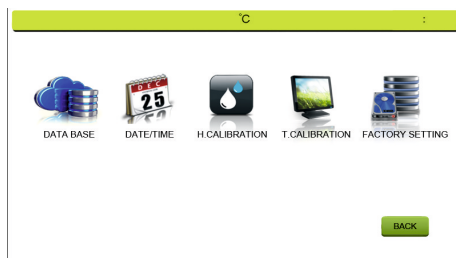
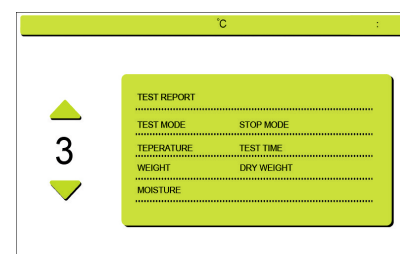
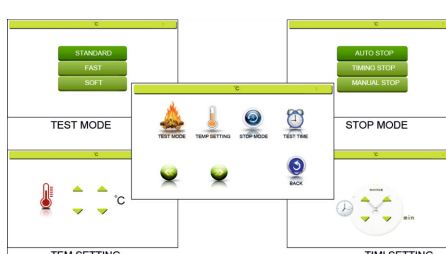
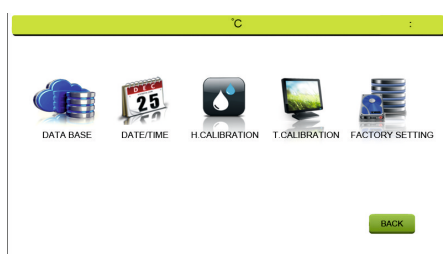


E - Catalogue

210g / 1mg

MOISTURE ANALYZER

LMB20





Moisture Analyzer

HSN Code - 90160010










SPECIFICATIONS

MODEL	LMB20
Make	WENSAR
Capacity	210g
Readability	0.001g (1mg)
Repeatability	0.001g
Linearity	±0.003g
Display	7 inches Touch Screen
Display Results	Moisture / Sample weight / Dry%
Aluminium Sample PAN	Available
Pan Size	100mm
Sensor	Loadcell
Calibration	Automatic External
Operating Temperature	5°C - 35°C
Heating Source	Halogen Lamp
Interface & Communication	RS232C & Wireless Indication
Moisture Range	0.00%-100.00%
Moisture Resolution	0.01%
Temp. Setting	40°C~200°C
Temp. Step	1°C
Time Setting	1-99min.
ATRO	100%~999%
Storage	20 groups
Date & Time	Available
Power Supply	AC 220V / 50-60 Hz
Dimension (LxWXH)	585 x 370 x 460 mm
Net / Gross Weight	4.7 / 6.5 Kg








★ Specifications are subject to change without notice.

STANDARD ACCESSORIES : Main Instrument, Indicator, Aluminium PAN, Dust Plate, PAN Handle, PAN Supporter, Power Cable, Instructional Manual, Test Certificate.

WENSAR Product Range 2025-26

TAB9T  102/220g - 0.01/0.1mg	TAB10T  81/220g - 0.01/0.1mg	KAB10L  61g/0.01mg	KAB4L, 7L  82/220g, 102/220g - 0.01/0.1mg	KAB8L, 9L  51/220g, 100/120g - 0.01/0.1mg
KAB2L  220g / 0.1mg	KAB5L, 6L  220, 320g / 0.1mg	TAB1T  220g/0.1mg	TAB2T, 3T  220, 320g / 0.1mg	TAB5T  220g / 0.1mg
EMB11  Moisture Analyzer	LMB1, LMB1IR  Moisture Analyzer (Halogen / IR)	LMB16  Moisture Analyzer	LMB17T  Moisture Analyzer	LMB20  Moisture Analyzer
EPB6T, 7T, 8T  220g, 520g, 1020g / 0.001g	EPB3000  3200g / 0.01g	IZ540A, IZ540E  Ionizer	LPB1GSM  Digital GSM Meter	PGB201D  220g / 0.001g - Density Balance
PGB200, PGB301  200g, 300g / 0.001g	LPB21, 22  200g, 300g / 0.001g	LPB23  200g / 0.001g	PGB220, 321  220g, 330g / 0.001g	LPB25T, 26T  220g, 320g / 0.001g

WENSAR Product Range 2025-26

PGB211M  220g/0.001g	PGB600, 1000  600g, 1000g / 0.01g	PGB630  600g / 0.01g	PGB3010, 6000  3000g/0.01g, 6000g/0.1g	PGB3110, 6100  3000g/0.01g, 6000g/0.1g
LPB24  3000g / 0.01g	PGB5010M  5000g / 0.01g	PGB610  600g / 0.01g	PGB1200  1200g / 0.01g (Price Calculation)	PGB1210  1200g / 0.01g
PGB3001  3000g / 0.01g	TTB30M  30kg / 0.1g	TTB3, 15, 31  3kg/0.1g, 15kg/0.5g, 30kg/1g	TTB20HH  20kg / 0.1g	TTB52  50kg / 2g
PFB101H  100kg / 1g	PFB60, 100, 300  60kg/5g, 100kg/10g, 300kg/20g	WDK200 - 205 WDK250  Density Kit	TP1, TP2, TP3, TP4  Thermal Printer	DP5 to DP18  Dotmatrix Printer
AVP304SS, AVP100  Anti Vibration Pad	EDP10, 20, 30  Extra Display	E1 Standard Weights  E1 Class - Standard Weights	E2 Standard Weights  E2 Class - Standard Weights	F1 Standard Weights  F1 Class - Standard Weights