


**EPB6T, 7T, 8T**

CATALOGUE 2024-25

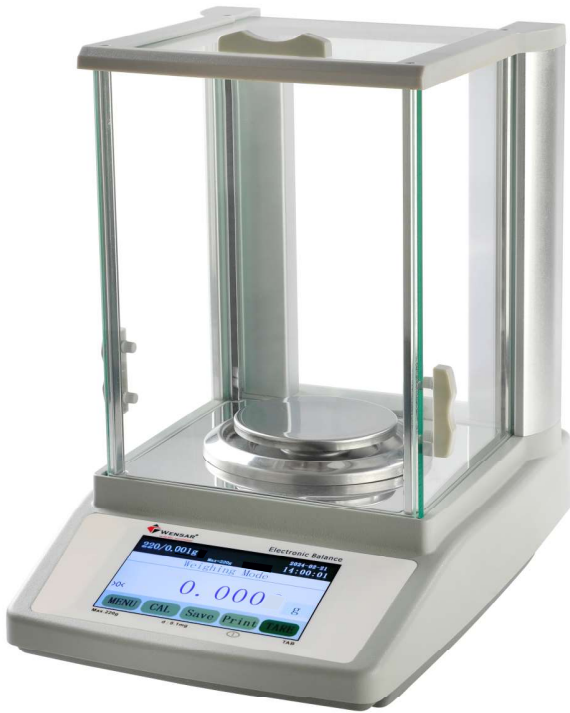







**SALIENT FEATURES**

- ✦ EMFC Based
- ✦ Touch Screen display
- ✦ User Password Protection
- ✦ Percentage Weighing
- ✦ Multiple Weighing Units
- ✦ Density Determination Function
- ✦ RS232C Interface
- ✦ Piece Counting Function
- ✦ Underhook Weighing
- ✦ Internal Calibration
- ✦ Date Time Display
- ✦ Memory upto 20



E - Catalogue

**1mg (EMFC)**  
**High Precision Balance**  
**EPB6T, 7T, 8T**

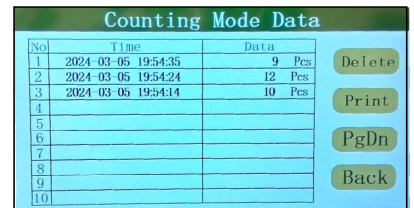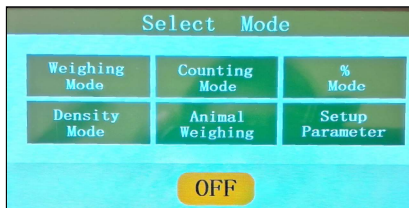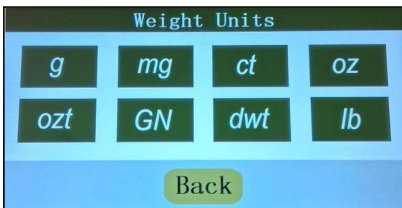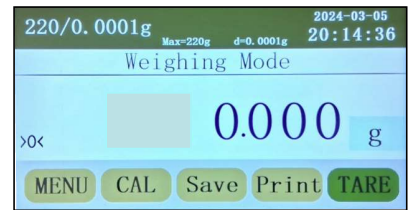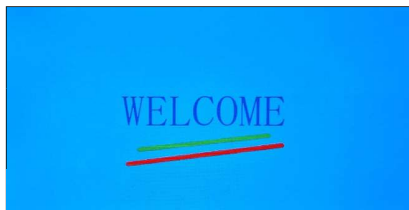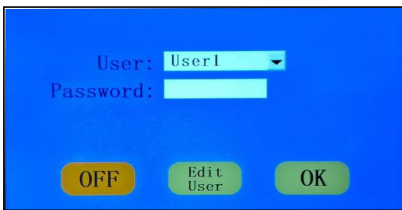

**EPB6T, 7T, 8T**

CATALOGUE 2024-25



## High Precision Balance

HSN Code - 90160010

| MODEL                   | EPB6T                          | EPB7T | EPB8T    |
|-------------------------|--------------------------------|-------|----------|
| Capacity                | 220g                           | 520g  | 1020g    |
| Pan Size                | 90 mm Ø                        |       | 120 mm Ø |
| Make                    | WENSAR                         |       |          |
| Calibration             | Internal Calibration           |       |          |
| Readability             | 0.001g ( 1mg )                 |       |          |
| Repeatability           | 0.001g                         |       |          |
| Linearity ( ± )         | 0.002g                         |       |          |
| Min.(Capacity)          | 100mg                          |       |          |
| Display                 | Touch Screen                   |       |          |
| Response Time           | 4- 5 Sec                       |       |          |
| Tare Range              | Full                           |       |          |
| Operating Temperature   | 15°C to 30°C                   |       |          |
| Density                 | Yes (Optional)                 |       |          |
| Unit                    | mg, g,ct, ozt, oz, GN, dwt, lb |       |          |
| Key Sound               | Yes                            |       |          |
| Weighing Chamber Height | 195 mm                         |       |          |
| Baud rate               | 600, 1200, 2400, 4800, 9600    |       |          |
| Class                   | I                              |       |          |
| Interface               | RS232C                         |       |          |
| Data Output Mode        | Command and continuous Output  |       |          |
| Power Supply            | AC 220V / 50-60 Hz             |       |          |
| Dimension (LxWxH)       | 220 x 360 x 345 mm             |       |          |
| Weight                  | 10kg                           |       |          |

SPECIFICATIONS

★ Specifications are subject to change without notice.

Density Determination Kit for liquid samples (Optional) - Manual Calculation

**STANDARD ACCESSORIES :** Main Instrument, Weighing PAN, Power Cable, Dust Cover, Test Certificate.