










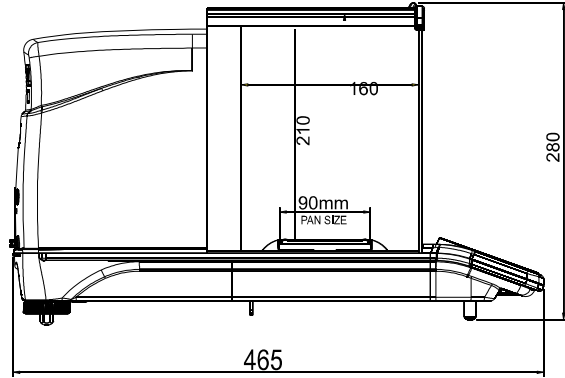




# KAB1L

CATALOGUE 2024-25



Keypad **220g/0.1mg**  
**Analytical Balance**  
**KAB1L**



-  Electro Magnetic Force Compensation
-  Statistic Weighing
-  Animal Weighing
-  White Back Light LCD display
-  Percentage Weighing
-  Multiple Weighing Units
-  RS232C Interface
-  Piece Counting Function
-  Temperature
-  Underhook Weighing
-  Calibration with Internal weight
-  Time
-  Date



ID	12345
	2016/10/28 12:03
-----	
	001+0100.0000 g
	002+0100.0000 g
	003+0100.0000 g
	004+0100.0000 g
	005+0100.0000 g
-----	
N	005
AVR	+0500.0000 g
S	0000.000 g
MAX	+0100.0000 g
MIN	+0100.0000 g
DIF	0000.0000 g
-----	

**KAB1L**

CATALOGUE 2024-25

**Analytical Balance**

HSN Code - 90160020

MODEL	KAB1L
Max. ( Capacity )	220g
Readability ( d )	0.0001g (0.1mg)
Repeatability	0.2mg
Linearity ( ± )	0.4mg
Min. (Capacity)	10mg
Make	WENSAR
Calibration	Motorized Internal Calibration
Class	Class I
Display	LCD with back light
Response Time	4 - 6 Sec
Pan Size (mm)	90 mm Ø
Tare Range	Full
Operating Temperature	15°C to 30°C
Sensitivity Drift (±)	2ppm / °C
Density	Function Available
Data Output Mode Selection	Command & Continuous Output
Key Sound	Yes
Weighing Chamber Height	210 mm
Unit	g, oz, ct, lb, ozt, dwt, GN,
Application Mode	PCS,%, Weighing, Animal Weighing, Check Weighing, Density, Statistics Weighing
Baud rate Options	1200, 2400, 4800, 9600
Interface	RS232C
Power Supply	AC 220V / 50-60 Hz
Dimension (LxWxH)	580 x 385 x 480mm
Weight	13 Kg

SPECIFICATIONS

★ Specifications are subject to change without notice.

**STANDARD ACCESSORIES :** Main Instrument, Weighing PAN, PAN Ring, Power cable Dust Cover Cloth, Test Certificate.