



BREEZY EV LLC

SERVICE MANUAL



FOR MODELS:
BREEZE SERIES / SIERA SERIES / TERRAIN SERIES

SAFETY DETAILS

Read carefully all the safety statements before attempting any procedure.

This service manual must be thoroughly read before attempting any vehicle maintenance. Not following the instructions in this manual could lead to property damage, serious injury, or even death.

 **DANGER**

 **WARNING**

 **CAUTION**

This manual and the safety decals on the vehicle use specific signal words: **DANGER, WARNING, CAUTION, and NOTICE**. These terms indicate important safety messages that must be read, understood, and followed before operating the vehicle. Adhering to these precautions is essential for safe operation.

Ensure all safety decals remain visible and intact. If any safety decals are missing, damaged, or unreadable, they must be replaced immediately to prevent potential injury, property damage, or fatal accidents. Replacement decals are available from your authorized dealer or distributor.

Familiarize yourself with all local, state, and federal regulations regarding vehicle operation. Compliance with these laws ensures both safety and legal operation.

For any questions regarding the content of this manual or the vehicle itself, contact your authorized dealer or distributor for assistance.

- Slow down whenever driving on rough terrain or in challenging conditions.
- Use the brakes to manage speed on steep hills and slopes.
- Keep a safe distance from nearby vehicles.
- Reduce speed on wet or icy roads.
- Be cautious when approaching sharp or blind turns.
- Exercise extra care in areas where pedestrians are present.

SAFETY DETAILS

Read carefully all the safety statements before attempting any procedure.

HOW TO MAKE A WARRANTY CLAIM

To make a warranty claim under this limited warranty, you must present the vehicle or defective component with evidence of proof of purchase date to an authorized Breezy EV LLC dealer. For warranty-related communication, contact your sales.

CONTACT INFORMATION

Website: <https://breezyev.com>


Email: info@breezyev.com

Address: Carrollton, TX

VEHICLE SAFETY LABELS



OPERATING INSTRUCTIONS



-Read owner's manual and dash-mounted safety warnings prior to driving.

TO OPERATE

- Turn wheels to desired direction and ensure path is clear.
- Turn key to ON position. While stopped, place Forward/Reverse switch in desired position:
 - F-Forward N-Neutral R-Reverse (Buzzer will sound)**
 - Press accelerator pedal to release parking brake.
 - Slowly press accelerator pedal to increase speed.
 - To stop, release accelerator pedal and press brake pedal.

BEFORE LEAVING

- Press parking brake pedal until it locks and holds vehicle.
- Place Forward/Reverse switch in NEUTRAL position.
- Turn key OFF and remove key when not in use.

MOTOR BRAKE

- Electric motor braking provides speed regulation functions.
- Apply brakes to control vehicle speed as required.
- System is activated only when switch is in the "F" position.
- When towing this vehicle, unlock motor brake, direction switch must be in the NEUTRAL position.

Take the time to grasp the principles of safety. This understanding could be crucial for your well-being.

VEHICLE PREP

Battery On/Off.....	5
Wheel Chocks.....	6
Lifting Front Body.....	7
Lifting Rear Body.....	8
Dash Removal.....	9
Removal and Installation of Cup Holder.....	9
Torque Tightening Guide.....	10

MOTOR

Electric Motor Replacement.....	11-15
Encoder Replacement.....	16-17
Run/Tow Switch.....	18-19

BRAKES

Electric Brake Disc Replacement.....	20
Brake Pad and brake cylinder Replacement.....	21-23
Brake Master Cylinder Removal.....	24-26
Brake Bleeding Instructions.....	27-29
Brake switch and accelerator Replacement.....	30-32

ELECTRICAL

Panel Replacement.....	33
Forward/Reverse Switch Replacement.....	34
Key Switch Replacement.....	35-36
Turtle/Rabbit Switch Replacement.....	37
Hazard Light Switch Replacement.....	38
USB Switch Replacement.....	39
Cigarette lighter Switch Replacement.....	40
Lithium Battery Replacement.....	41-44
Charger Replacement.....	45-46
Controller Replacement.....	47-49
Voltage Converter Replacement.....	50-51

SUSPENSION

Front Shock replacement.....	52
Rear Shock Replacement.....	53
Rear spring/bushing replacement.....	54-57
Front Suspension Alignment.....	58-61
Lower Control Arm Rod End Replacement.....	62-64
Upper Control Arm Rod End Replacement.....	65-67
Steering Rack Replacement.....	68-70

BODY & ACCESSORIES

Front Bumper Replacement.....	71
Rear Bumper Replacement.....	72-74
Headlight Replacement.....	75
Taillight Replacement.....	76
Roof Replacement.....	77
Windshield Replacement.....	78
Soundbar Replacement.....	79-80
Display Screen Replacement.....	81-82
Light/Brake Handle Switch Replacement.....	83-86
Headlight Controller Replacement.....	87-88

Read carefully all the safety statements before attempting any procedure.


Battery On/Off

- Ensure the vehicle's power is turned off when replacing parts or performing repairs that do not require power.

1. Turn the key counterclockwise to the battery off state.



2. Check whether the battery switch is off.

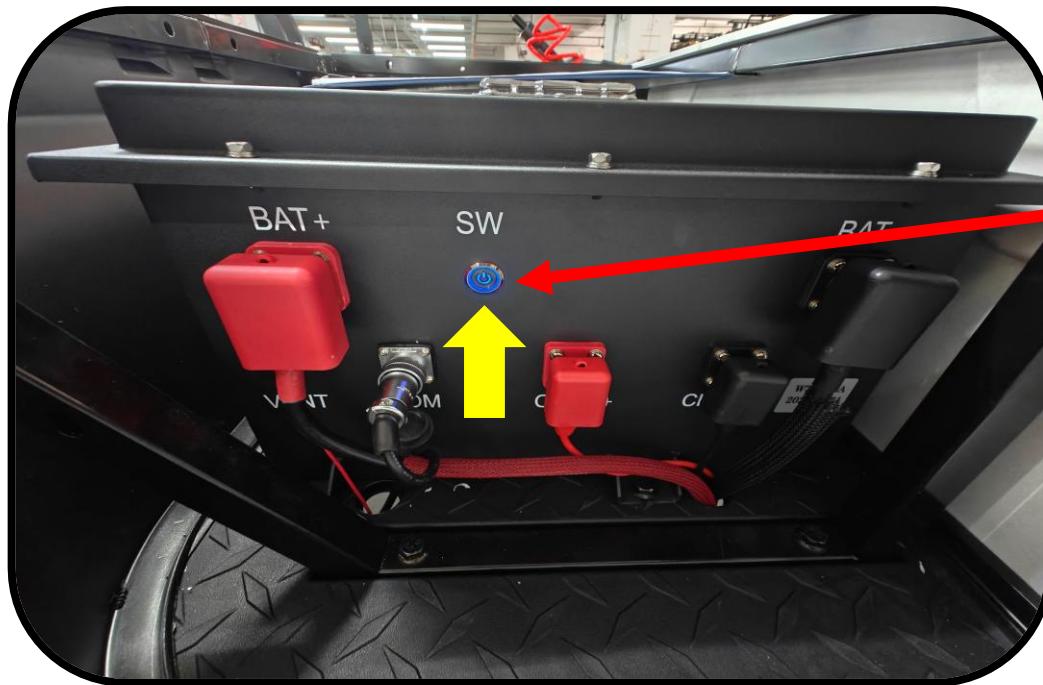

The picture above shows the battery turned on.

Wheel Chocks

To prevent the vehicle from rolling while under maintenance, wheel chocks should be placed in front of the front wheels and behind the rear wheels.

TOOL NEEDED

2 Wheel Chocks
Torque Wrench

1. Ensure that your vehicle is parked on level ground and the parking brake is engaged.
2. When lifting the rear of the vehicle, place wheel chocks in front of the front wheels. If lifting the front, position wheel chocks behind the rear wheels. This helps keep the vehicle steady and prevents it from rolling.





Read carefully all the safety statements before attempting any procedure.

Lifting Front Body

1. Place the floor jack beneath the metal frame and lift the vehicle.
2. Position the jack stands beneath the metal frame for added support.

TOOL NEEDED

Floor Jack
Jack Stands

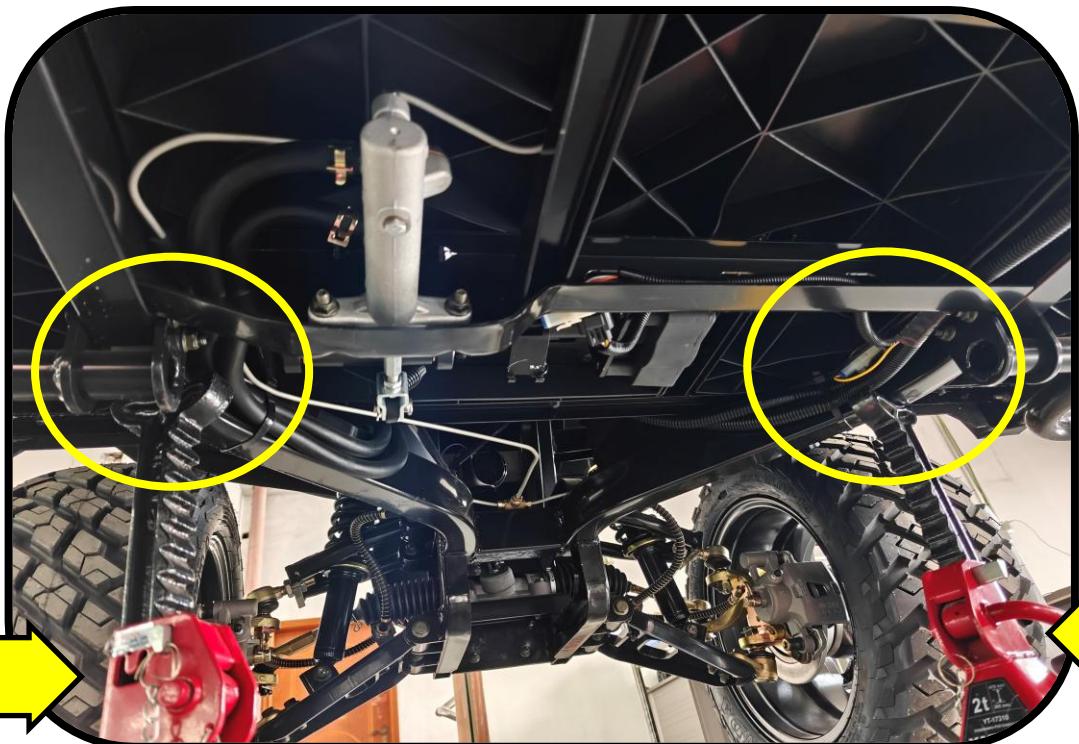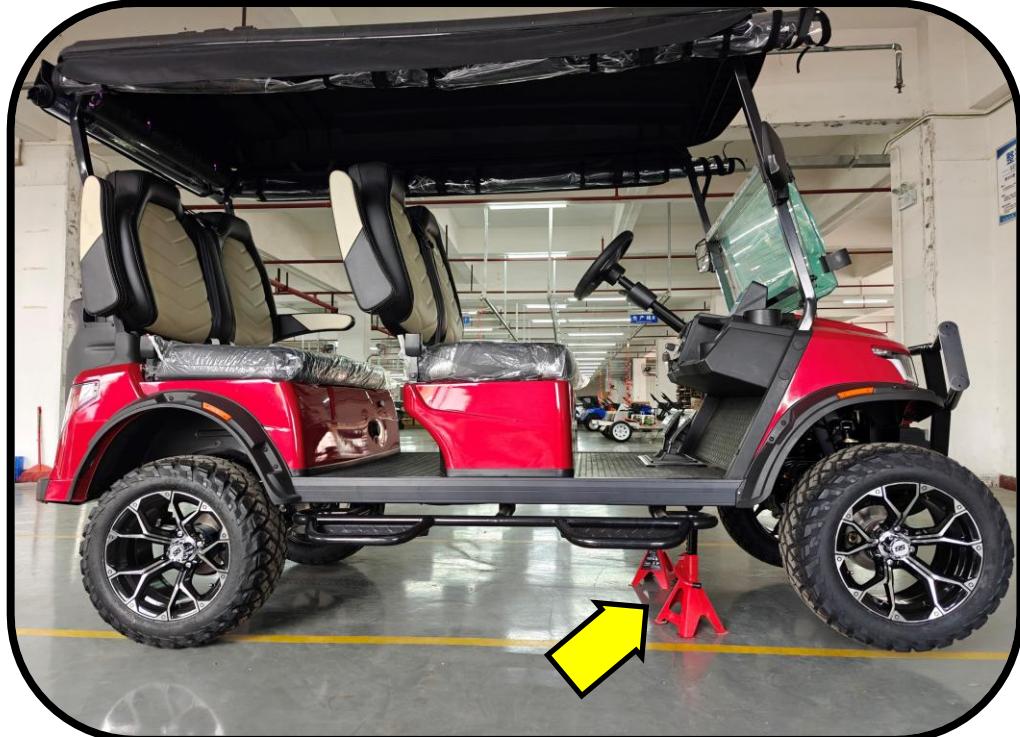

VEHICLE PRE


Read carefully all the safety statements before attempting any procedure.

Lifting Rear Body

1. Place the floor jack beneath the metal frame and lift the vehicle.
2. Place the jack stands at the rear, positioning them under both the metal frame and the axle for secure support.

TOOL NEEDED

Floor Jack
Jack Stands

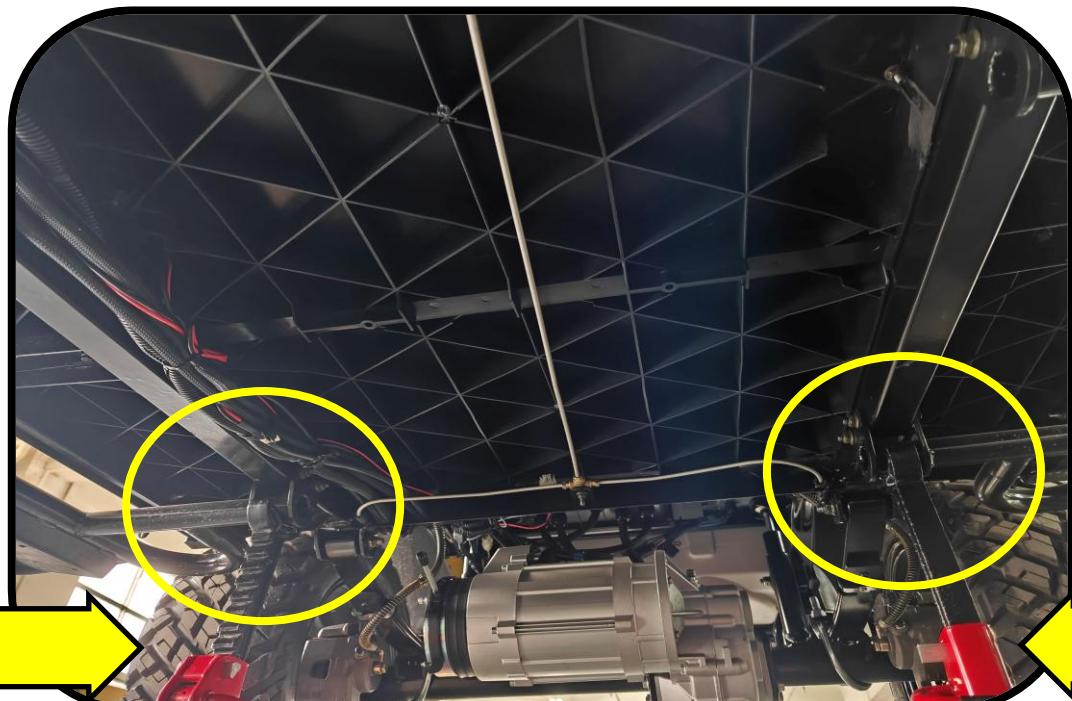

Read carefully all the safety statements before attempting any procedure.

Dash Removal

- As shown in the picture, remove the 4 screws by turning them counterclockwise.

TOOL NEEDED

Phillips screwdriver



Removal and installation of cup holder

- Clamp the jaws tightly and pull upwards to remove.



- Install the cup holder following the numbers shows in the picture



Torque Tightening Guide

Maximum Tightening Torque (Nm)

Size(mm)	Grade Level 8.8	Grade Level 10.9
M5	1.6	2.1
M6	3	4
M8	6	8
M10	10.5	14
M12	15.5	21
M14	24	31
M16	32	42
M24	80	106
M30	108	140

Read carefully all the safety statements before attempting any procedure.

Electric Motor Replacement

⚠️ WARNING:

Disconnect the battery before servicing the motor to prevent electric shock. Handle motor components with care, as improper installation may lead to performance issues or damage.

- Open the rear cushion (pull the belt in the direction of the arrow)



- Lift the seat cushion in the direction of the arrow to remove it for easy maintenance.



MOTOR



Read carefully all the safety statements before attempting any procedure.

Electric Motor Replacement


- Unplug these plugs :
 1. waterproof plug connected to encoder
 2. waterproof plug connected to motor temperature sensor
 3. plug connected to electric brake disc)

TOOL NEEDED


14mm wrench
10mm wrench

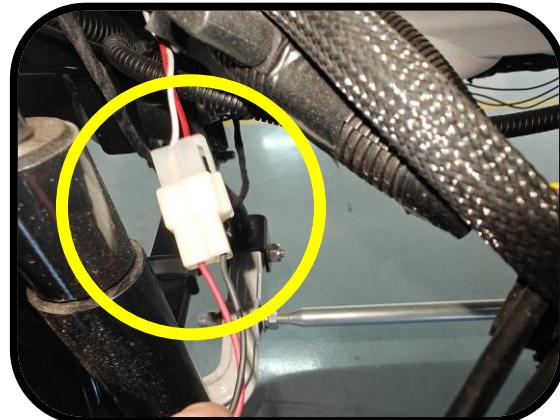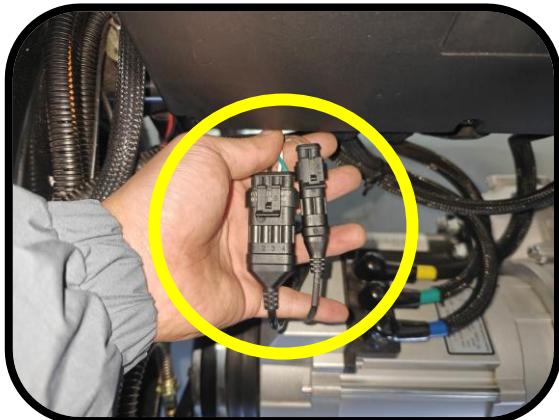

- Remove the motor wires (u, v, w)
- (use 14mm wrench)

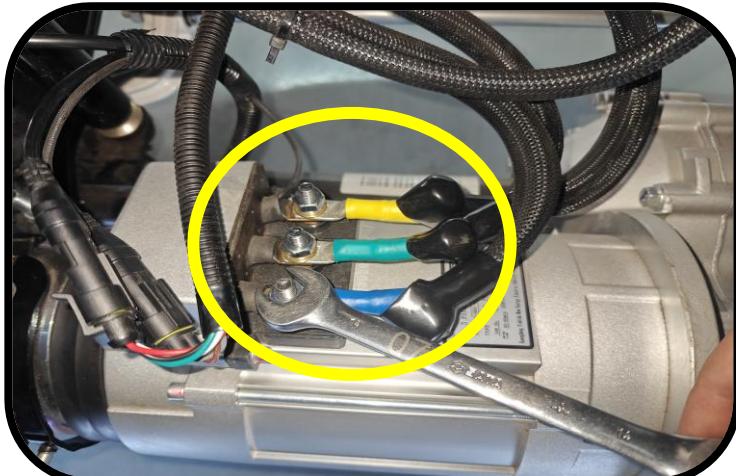

- Remove the motor fixing screws.
- (use 10mm wrench)

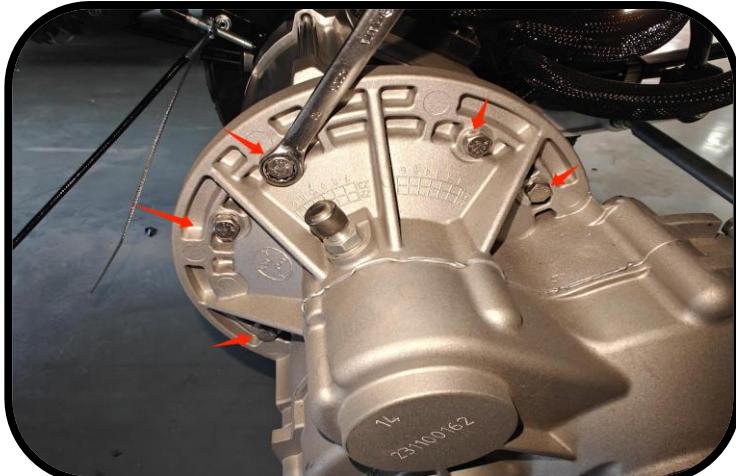


Read carefully all the safety statements before attempting any procedure.


Electric Motor Replacement

- Use a Phillips screwdriver to loosen the fastening screws as shown in the picture.

TOOL NEEDED
13mm wrench
Phillips screwdriver

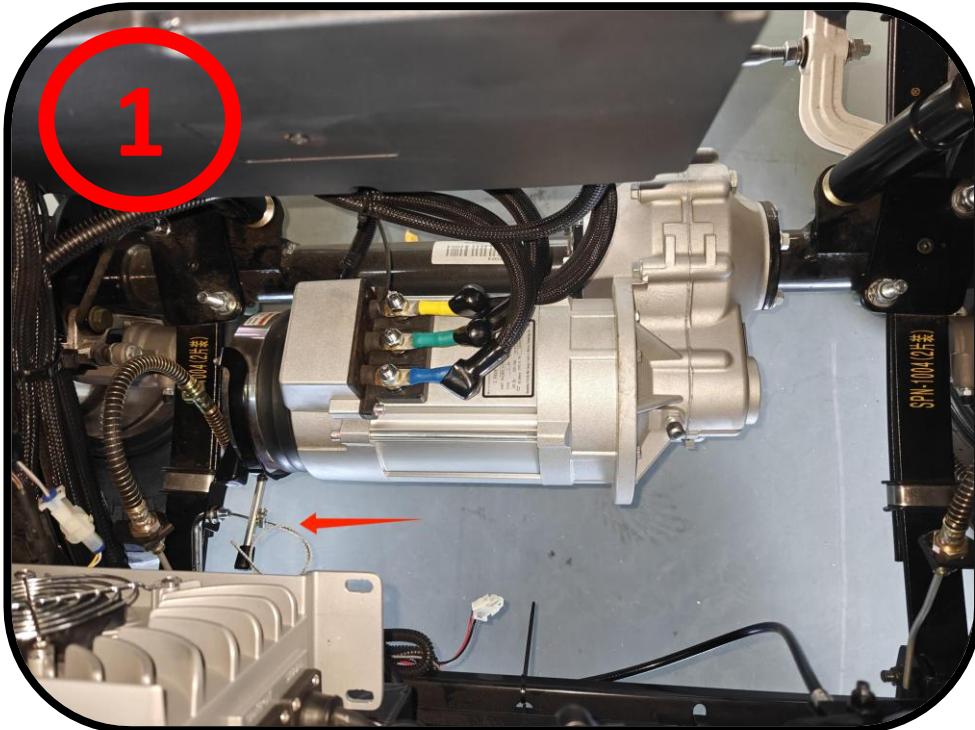

- Use a 13 open-end wrench to loosen the wire fixing screw

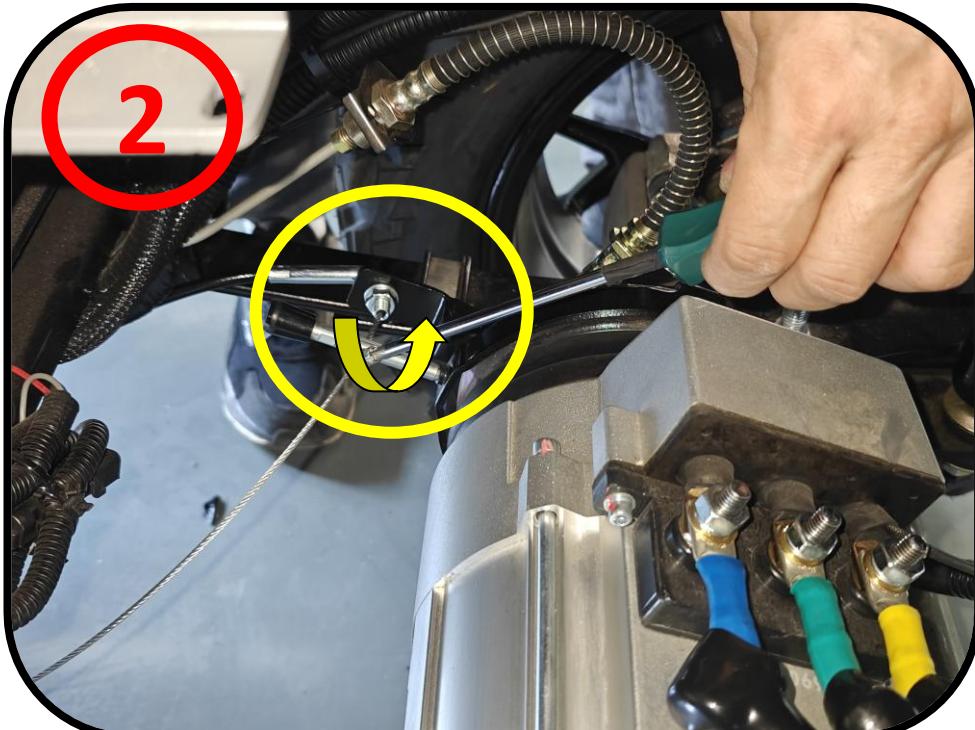


MOTOR

Read carefully all the safety statements before attempting any procedure.

Electric Motor Replacement

- Take out the pull wire

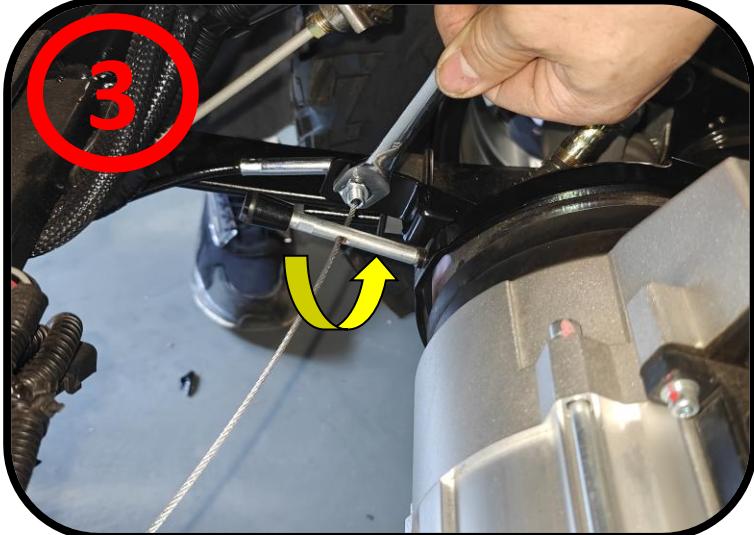



TOOL NEEDED
13mm wrench
Phillips screwdriver

Read carefully all the safety statements before attempting any procedure.

Electric Motor Replacement

- Lift out the motor

CAUTION: The motor is heavy; handle with care when removing it.

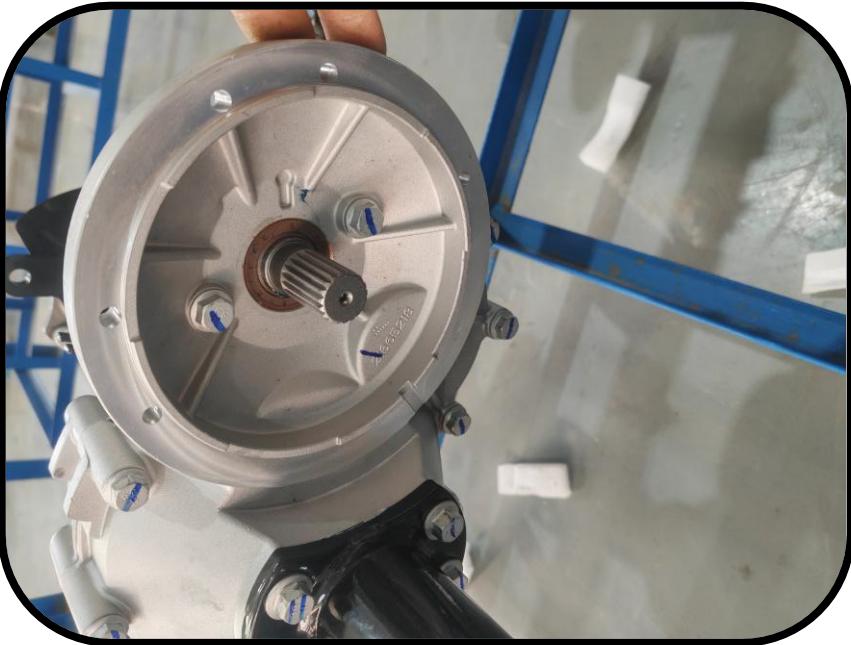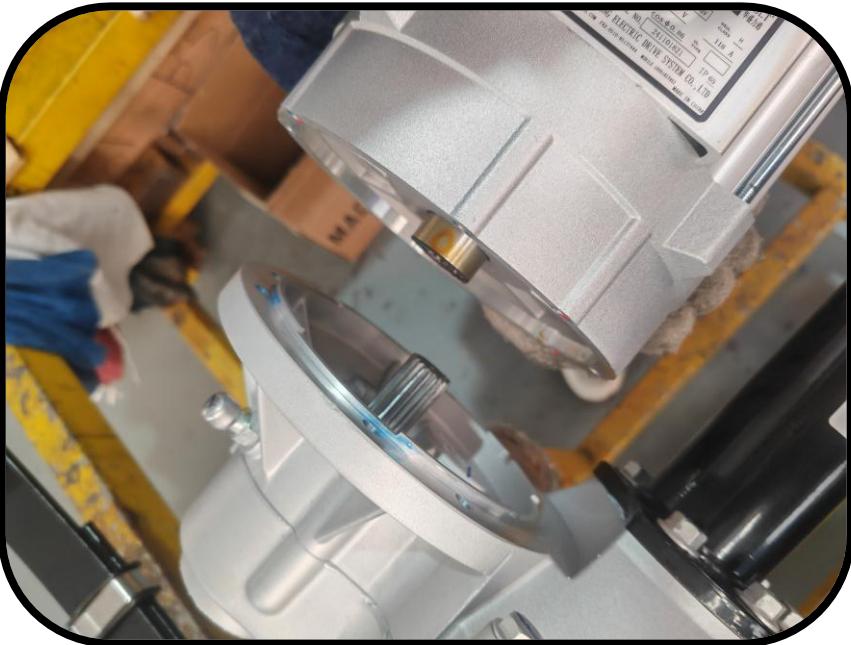

- Follow the steps in reverse to install the replacement motor. For securing any hardware, refer to the torque tightening guide on page 10.

Encoder Replacement



WARNING:

Disconnect the battery before servicing the motor to prevent electric shock. Handle motor components with care, as improper installation may lead to performance issues or damage.

TOOL NEEDED

Hexagon wrench
External circlip pliers
Rubber Mallet Hammer

1. Remove the electric brake disc fixing screws (use Hexagon wrench)
2. Remove the electric brake disc in the direction of the arrow.

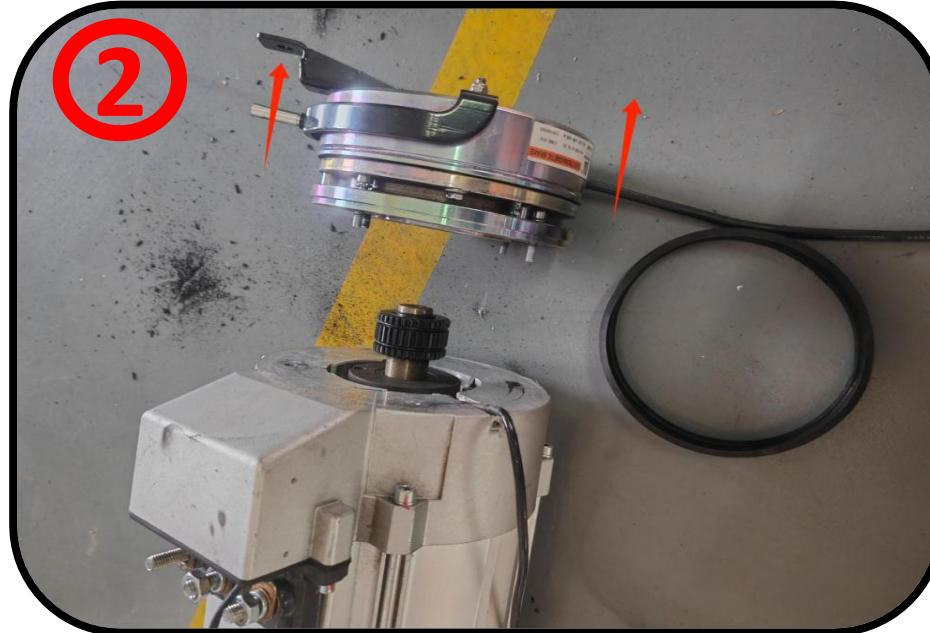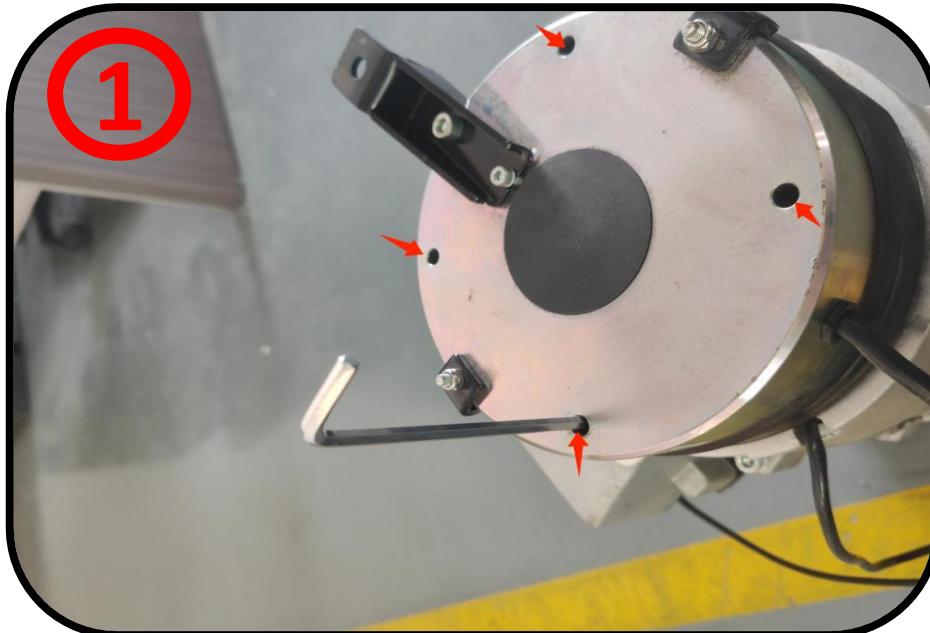




Read carefully all the safety statements before attempting any procedure.

Encoder Replacement

3. Use external circlip pliers to remove the circlip.
4. Use a rubber hammer to knock out the gear and use a hexagon socket to remove the encoder fixing screw (as shown in the picture), and the encoder can be removed.

TOOL NEEDED

Hexagon wrench
External circlip pliers
Rubber Mallet Hammer

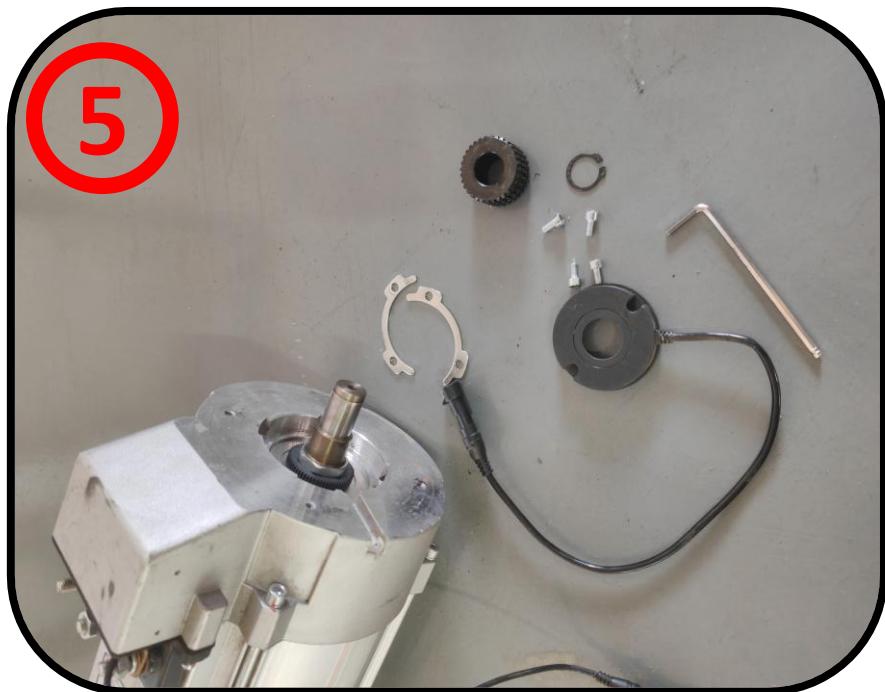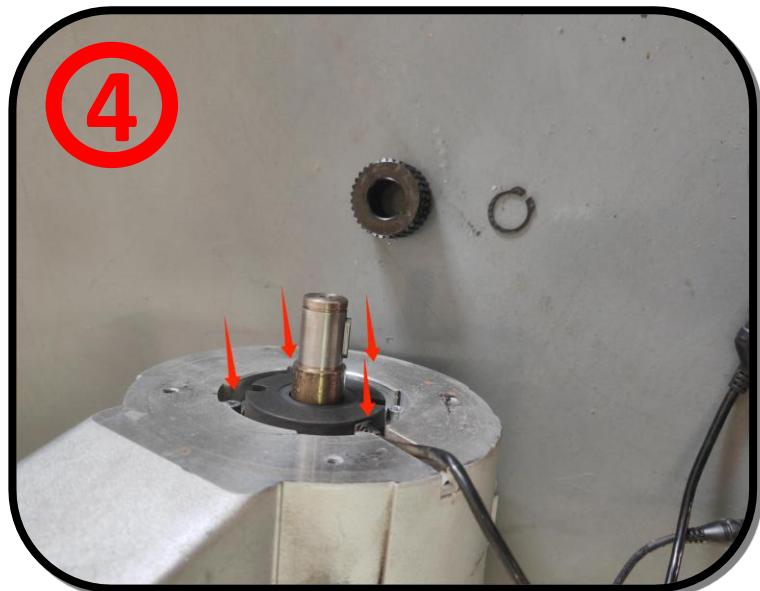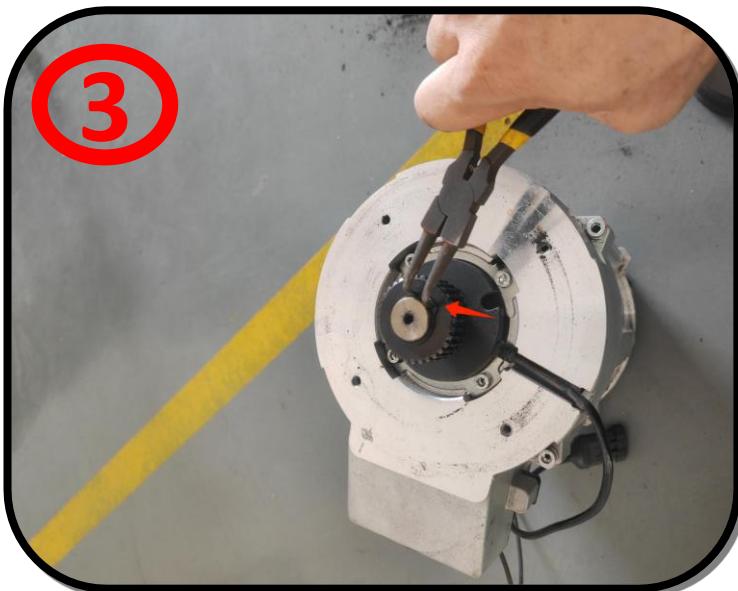

- Reverse these steps to install the replacement encoder.

MOTOR

Read carefully all the safety statements before attempting any procedure.

Run/Tow Switch

WARNING:

Disconnect the battery before servicing the motor to prevent electric shock. Handle motor components with care, as improper installation may lead to performance issues or damage.

- Loosen the switch fixing nut
- (Use Hexagon wrench)



- Use a utility knife to break the heat shrink tube




TOOL NEEDED

Hexagon wrench
Utility knife
Insulation tape
Phillips screwdriver

Read carefully all the safety statements before attempting any procedure.


Run/Tow Switch

- Remove the switch wire with a Phillips screwdriver and replace it.

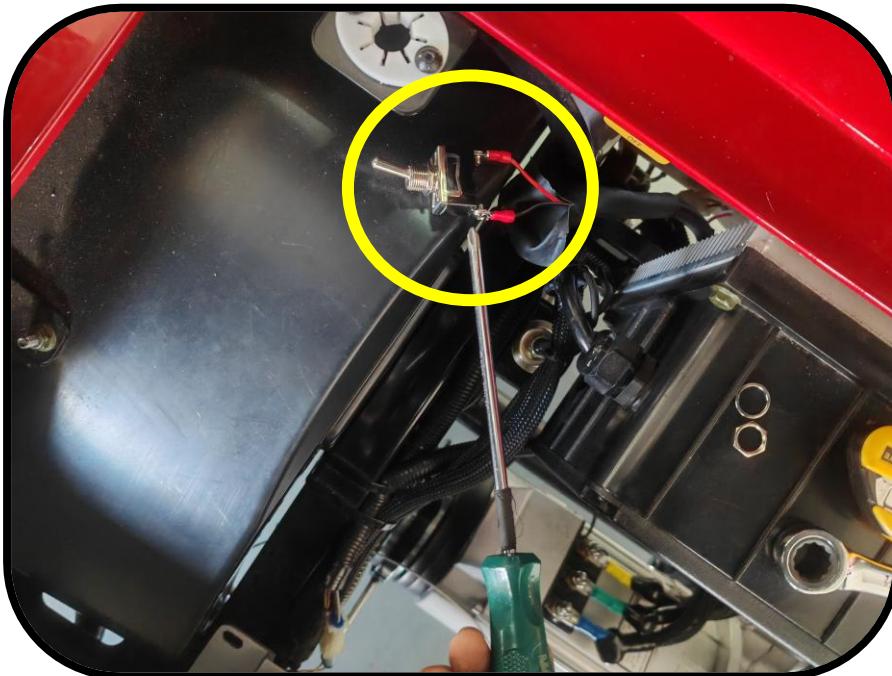

TOOL NEEDED

Hexagon wrench
Utility knife
Insulation tape
Phillips screwdriver

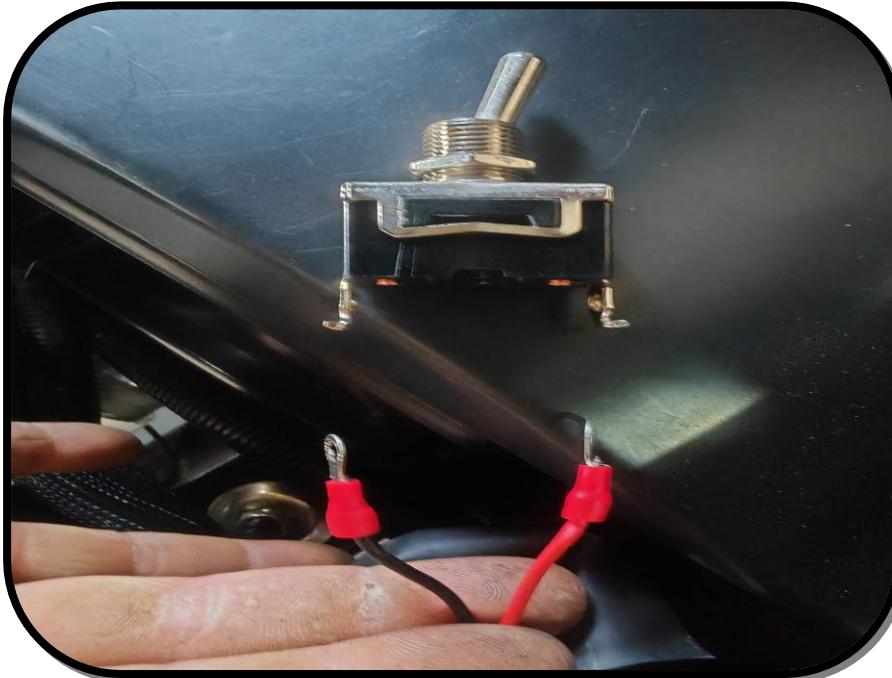

- Reverse these steps to install new Run/Tow switch.

BRAKES


Read carefully all the safety statements before attempting any procedure.

Electric Brake Disc Replacement

- Remove fixing screws
- Remove the electric brake disc in the direction of the arrow.


TOOL NEEDED

Hexagon wrench

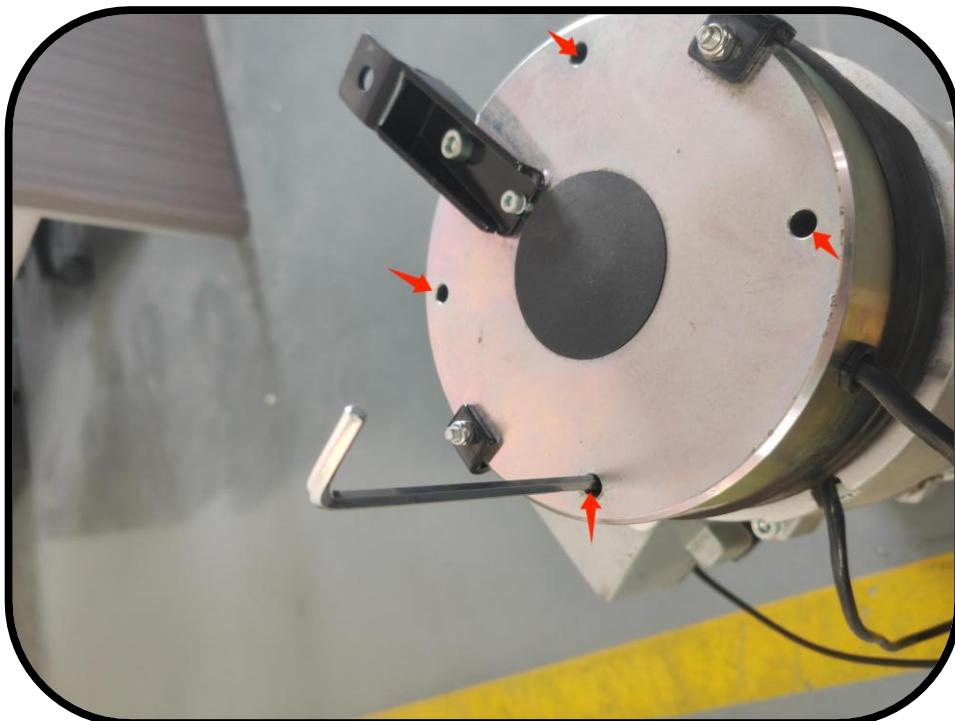

CAUTION:

Brake components are critical for vehicle safety. Always use manufacturer-approved parts and follow the correct bleeding procedure to avoid brake failure.

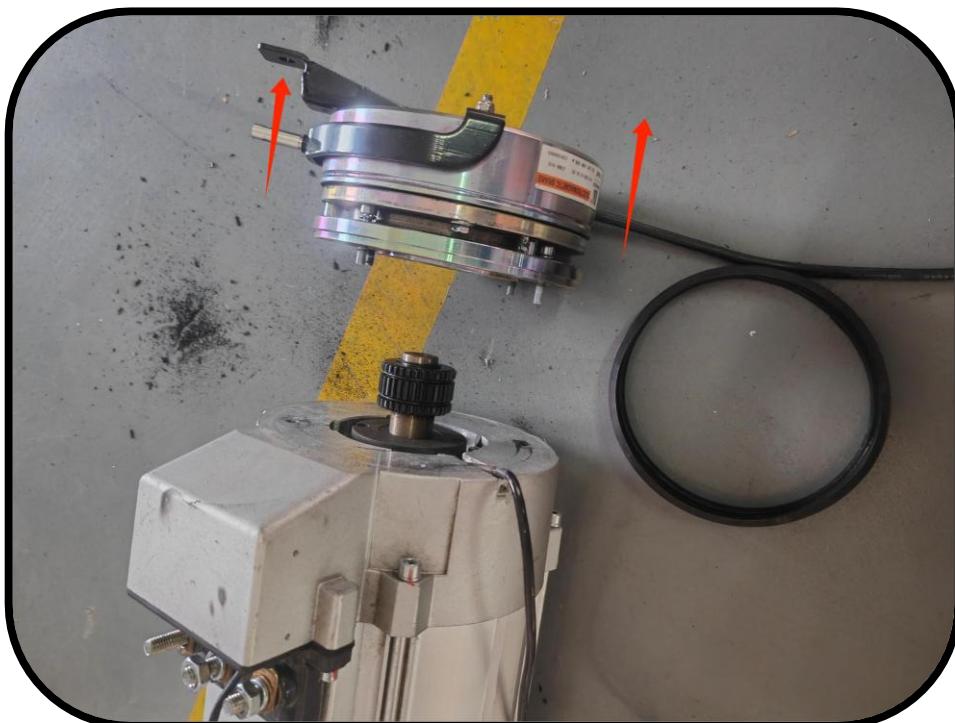

- Reverse these steps to install the replacement brake disc.

Read carefully all the safety statements before attempting any procedure.

Brake Pad and brake caliper Replacement

- Lift the front wheel with a jack



TOOL NEEDED

19mm Impact Wrench
18mm Open End Wrench
Slotted Screwdriver

CAUTION:

Brake components are critical for vehicle safety. Always use manufacturer-approved parts and follow the correct bleeding procedure to avoid brake failure.

- Use an Impact Wrench to remove the wheel nut and take out the wheel hub.



BRAKES


Read carefully all the safety statements before attempting any procedure.

Brake Pad and brake caliper Replacement


- Use an 18mm open-end wrench to remove the slave caliper fixing screws to separate it from the slave caliper lock plate.

TOOL NEEDED

19mm Impact Wrench
18mm Open End Wrench
Slotted Screwdriver

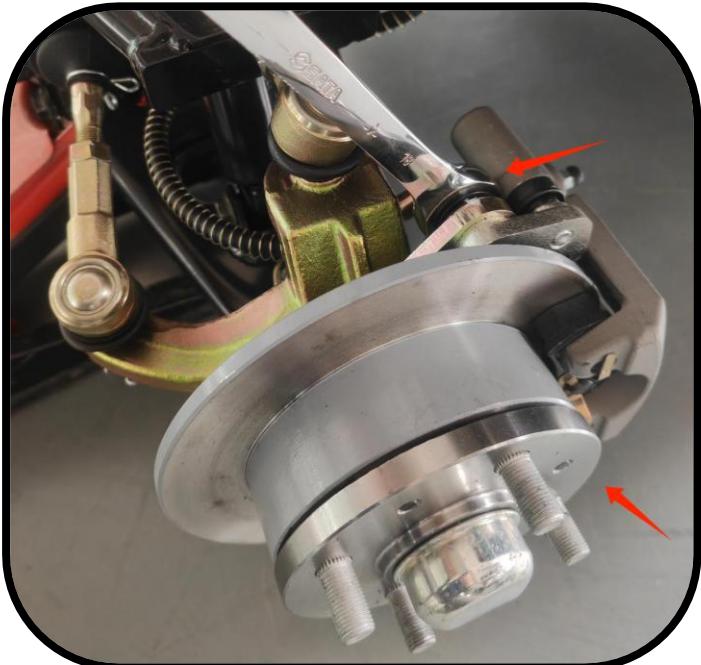

- Use your thumb to press the spring plate and remove the brake pad.

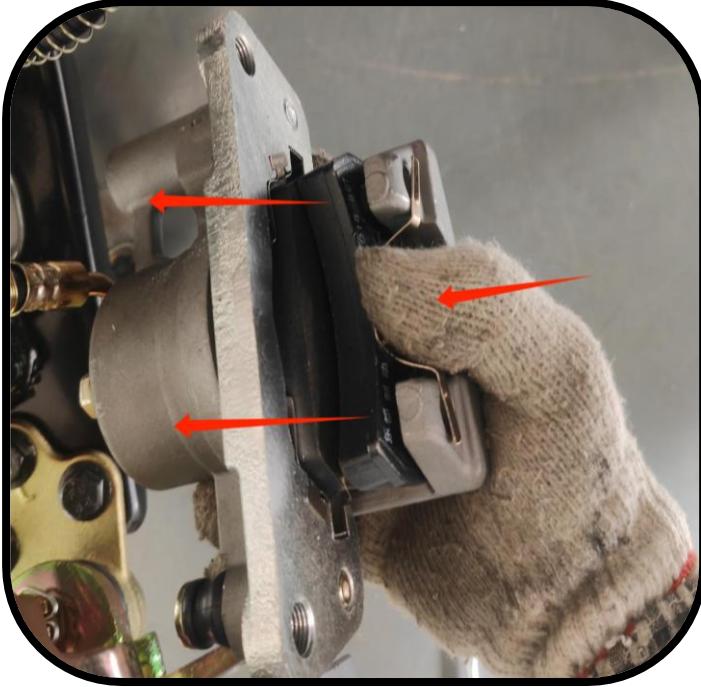



Read carefully all the safety statements before attempting any procedure.

Brake Pad and brake caliper Replacement

- Use a 14mm open-end wrench to remove the oil screw connecting the oil pipe to the slave caliper.

TOOL NEEDED

14mm open-end wrench

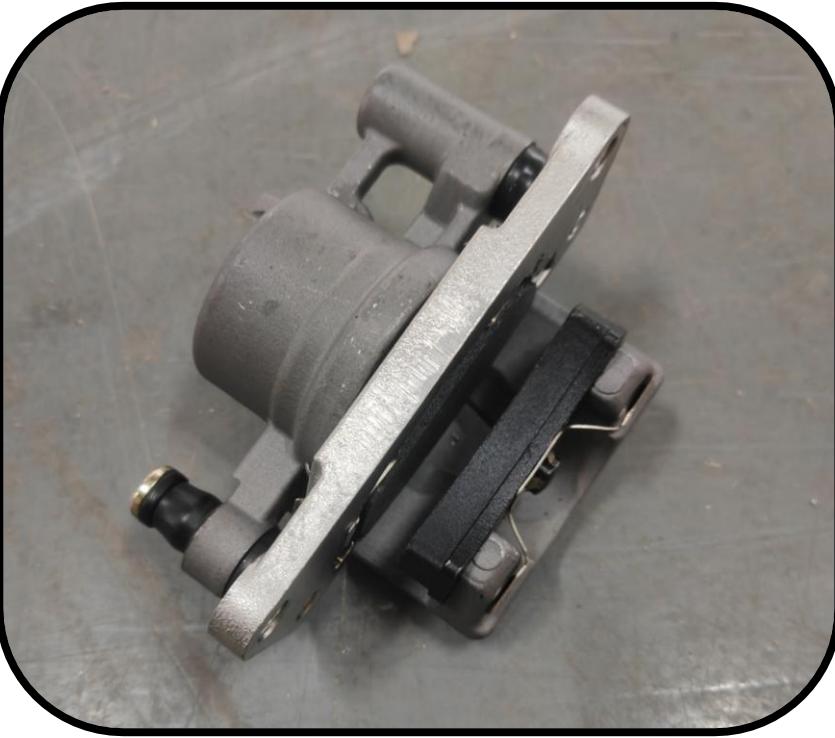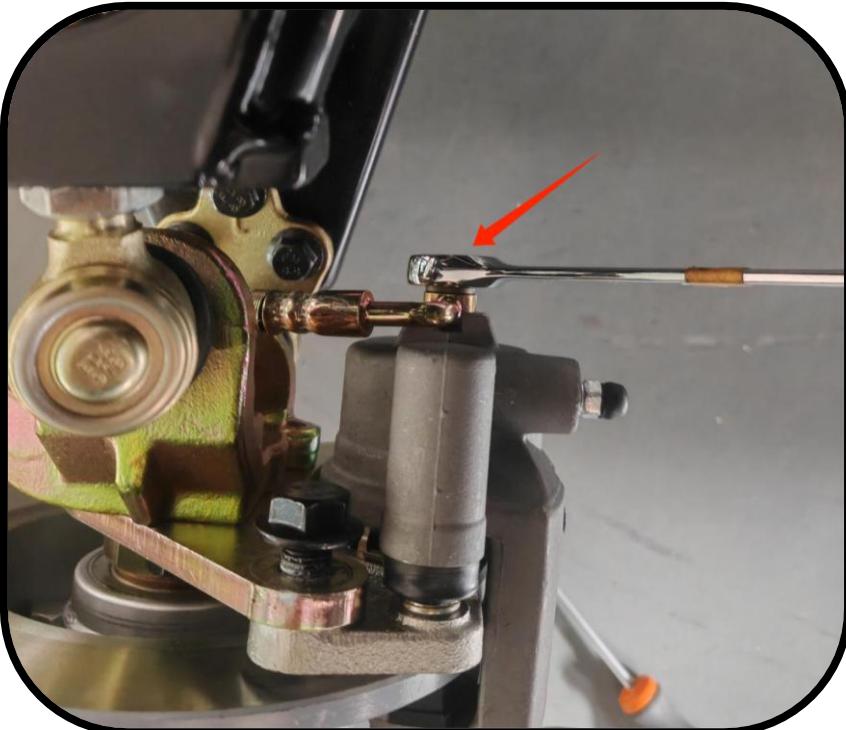

- Follow brake bleeding instructions to bleed the air from the brake line(s).

BRAKES

Read carefully all the safety statements before attempting any procedure.

Brake Master Cylinder Removal

- Use needle-nose pliers to loosen and remove the oil pipe clamp on the oil-resistant hose.



TOOL NEEDED

Needle Nose Pliers

10mm Open End Wrench

13mm Elbow Wrench

13mm Impact Wrench

⚠ CAUTION:


Brake components are critical for vehicle safety. Always use manufacturer-approved parts and follow the correct bleeding procedure to avoid brake failure.





Read carefully all the safety statements before attempting any procedure.

Brake Master Cylinder Removal

- Pull out the oil-resistant hose and separate it from the master caliper.

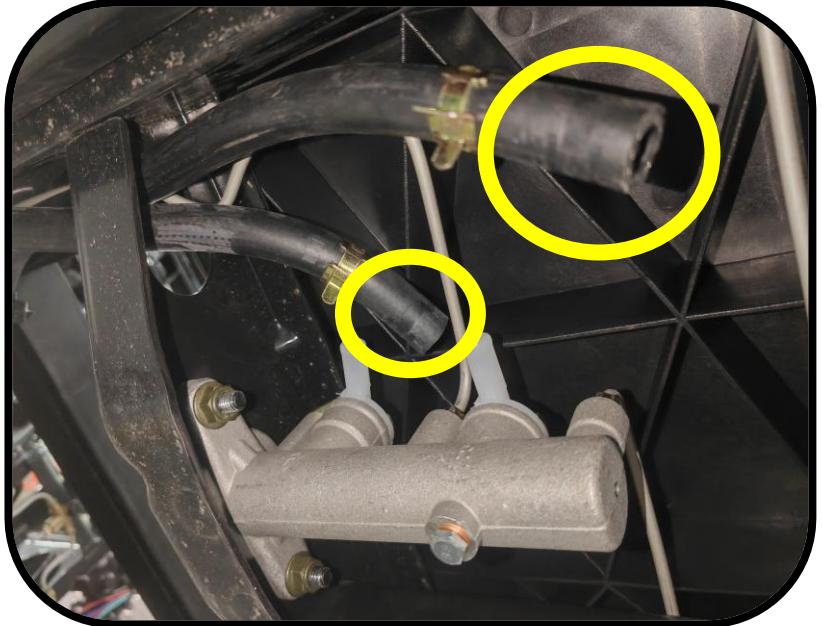

- Use a 10mm open-end wrench to loosen the locking nut connecting the steel oil pipe to the master caliper and then separate the steel oil pipe from the master caliper.

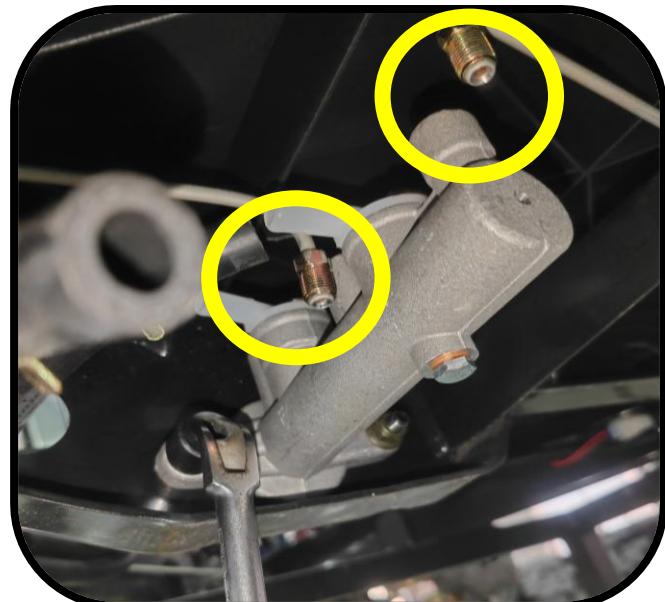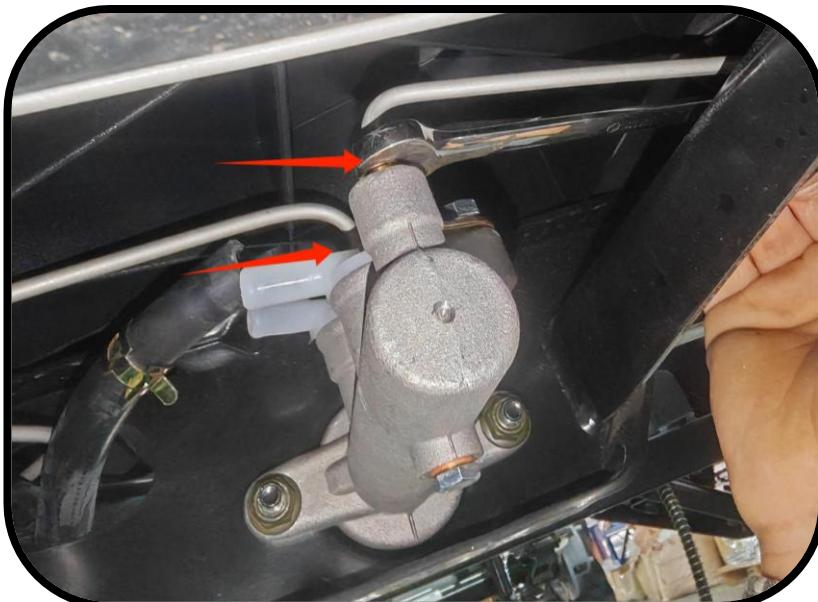

BRAKES


Read carefully all the safety statements before attempting any procedure.

Brake Master Cylinder Removal

- Use a 13mm Elbow wrench and a 13inch impact wrench to loosen and remove the screws and nuts securing the master caliper, then remove the master caliper.

TOOL NEEDED

Needle Nose Pliers
10mm Open End Wrench
13mm Elbow Wrench
13mm Impact Wrench

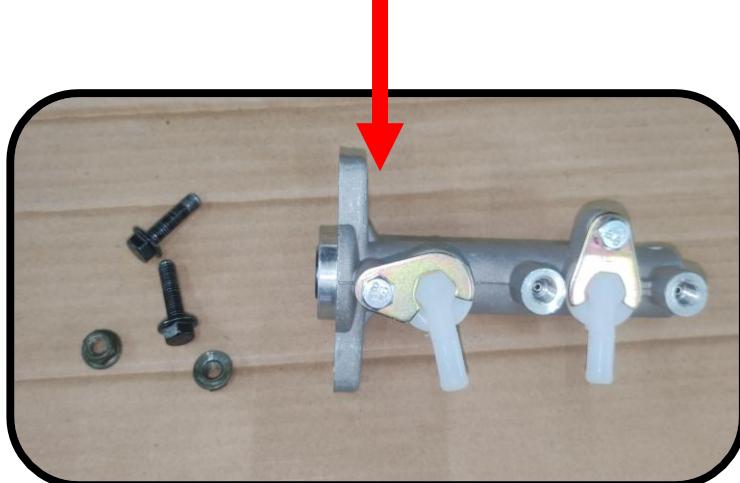

- Brake Master Cylinder Replacement (See Removal and Air Bleeding procedures.).

Read carefully all the safety statements before attempting any procedure.

Brake Bleeding Instructions

- Repeatedly press the brake pedal, then press and hold it. Do not release the pedal until the bleeder screw on the brake caliper has been opened, air has been expelled, and the screw has been tightened again. Otherwise, air may be drawn back into the system.

TOOL NEEDED

M10 open-end wrench

⚠ CAUTION:

Brake components are critical for vehicle safety. Always use manufacturer-approved parts and follow the correct bleeding procedure to avoid brake failure.




- Front caliper bleeder screw is at the position indicated. Remove the screw cap.



BRAKES

Read carefully all the safety statements before attempting any procedure.

Brake Bleeding Instructions

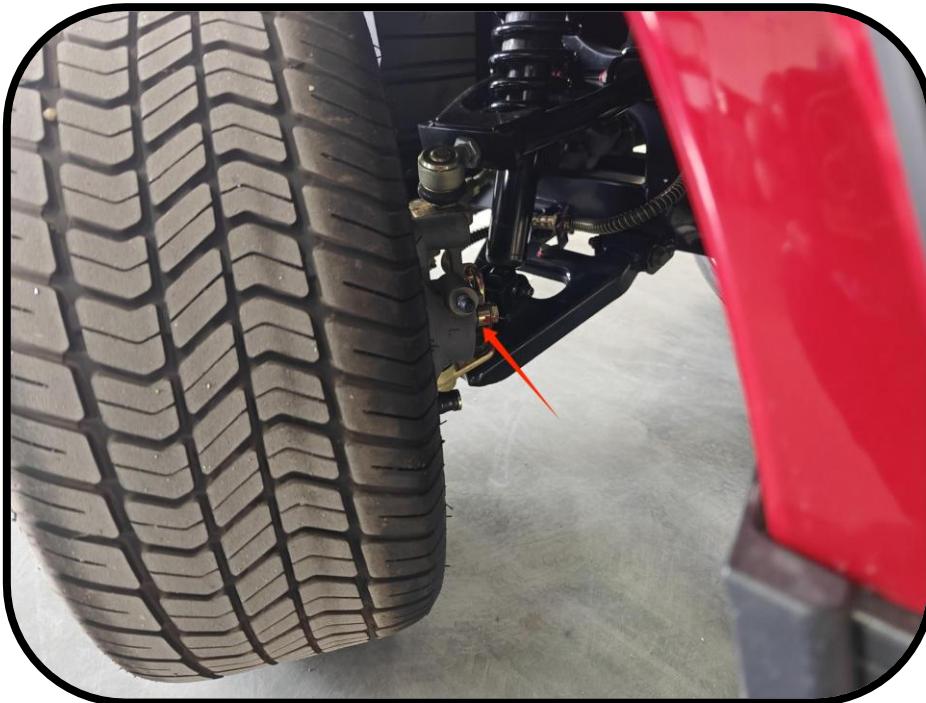

TOOL NEEDED

M10 open-end wrench

- Pump the brake pedal repeatedly. When the pedal is held down firmly, loosen the bleeder screw. Air and brake fluid will be released. Tighten the bleeder screw after bleeding.



Read carefully all the safety statements before attempting any procedure.

Brake Bleeding Instructions

- Rear wheel bleeder screw is located as shown in the image (same procedure as front wheel).

TOOL NEEDED

M10 open-end wrench



BRAKES

Read carefully all the safety statements before attempting any procedure.

Brake switch and accelerator Replacement

- Pry open the screw cover on the accelerator pedal and use a 6mm hex wrench to loosen and remove the screw.




TOOL NEEDED

6mm Hexagon wrench
Utility knife
Phillips screwdriver
4mm Hexagon wrench

CAUTION:


Brake components are critical for vehicle safety. Always use manufacturer-approved parts and follow the correct bleeding procedure to avoid brake failure.

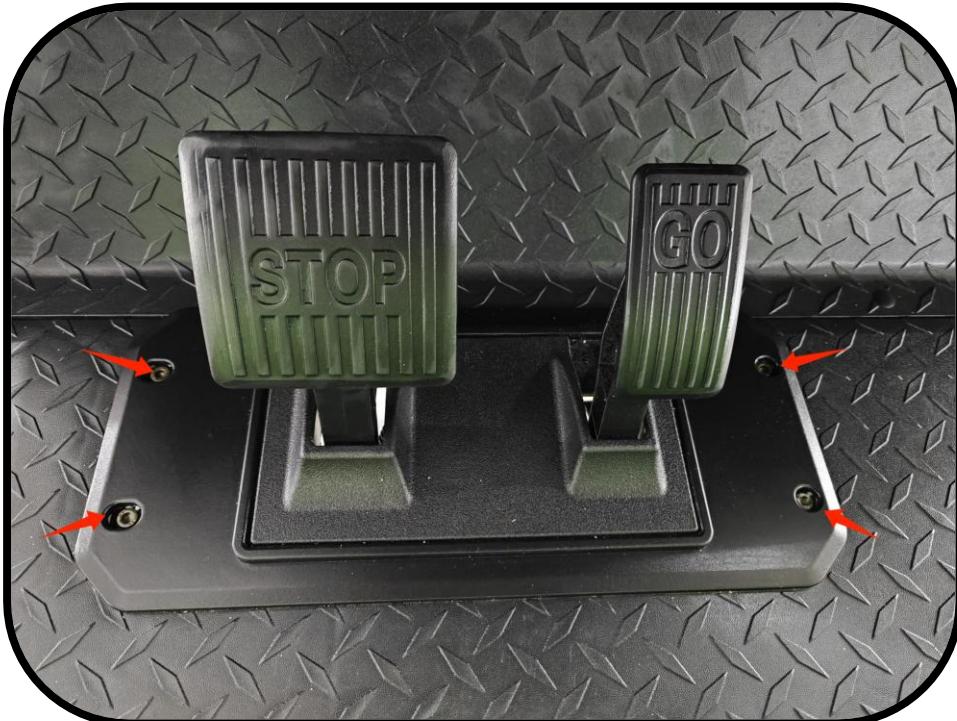


Read carefully all the safety statements before attempting any procedure.

Brake switch and accelerator Replacement

- Pull out the 6-pin waterproof connector (connected to the accelerator) and the 2-pin waterproof connector (connected to the brake switch).

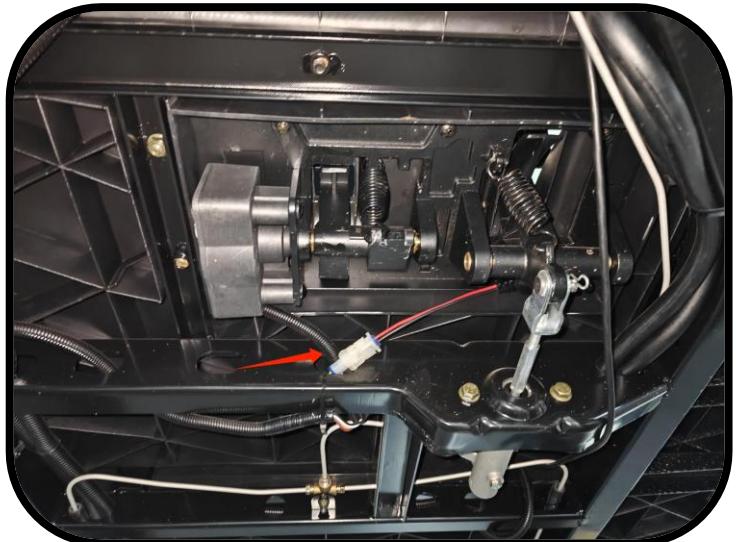

- Take it out in the direction of the arrow.

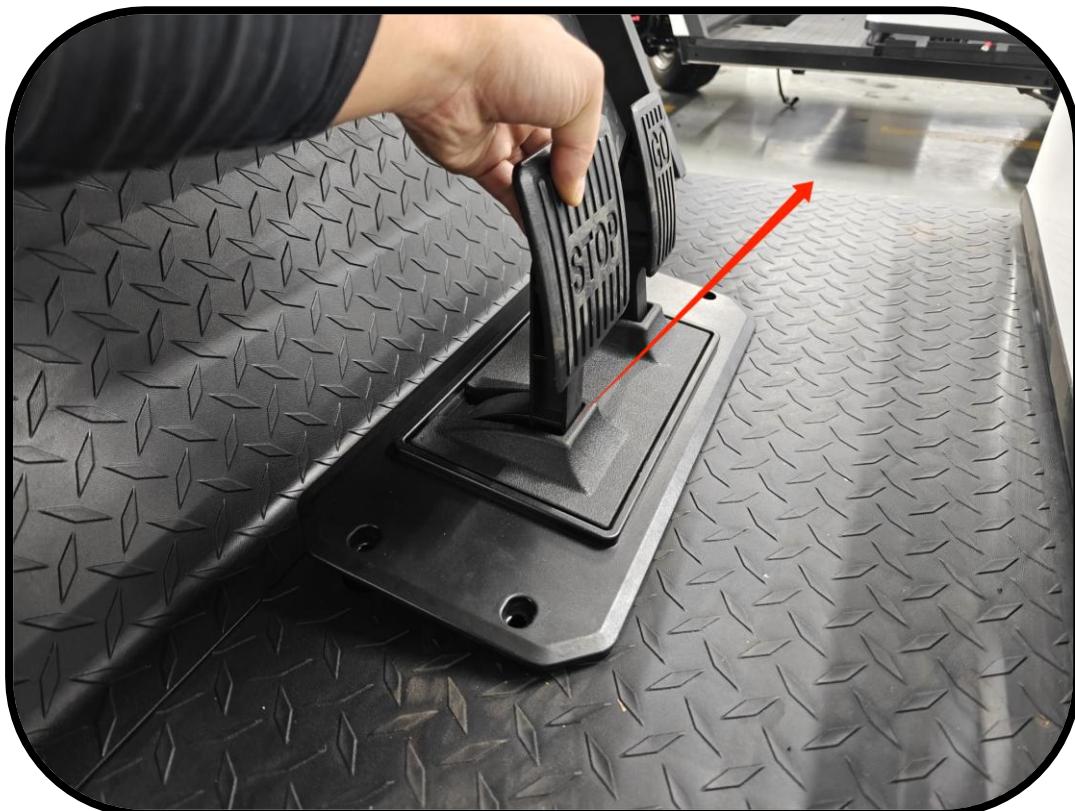


BRAKES

Read carefully all the safety statements before attempting any procedure.


Brake switch and accelerator Replacement

- Use a Phillips screwdriver to loosen and remove the screws securing the brake switch, then remove the brake switch.

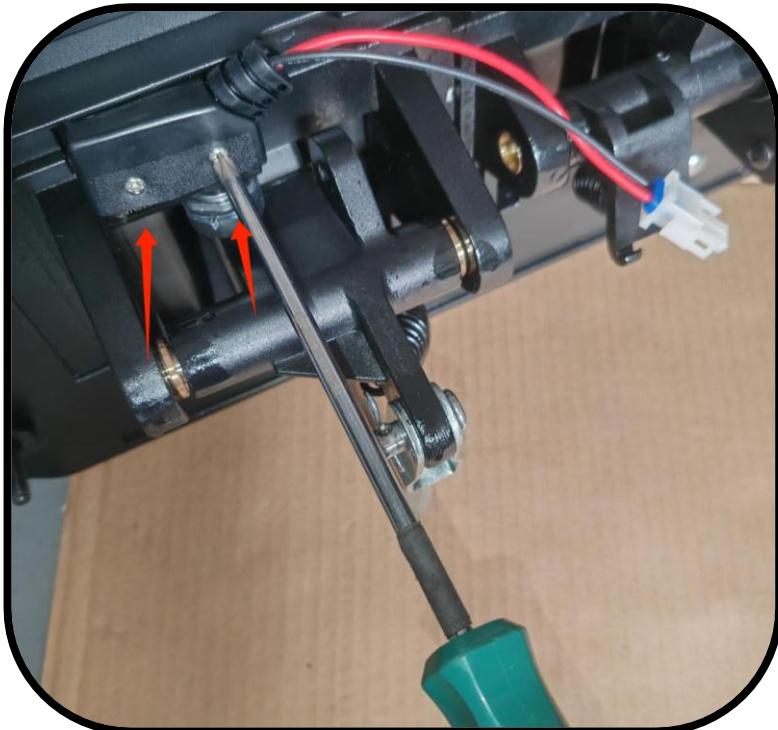


TOOL NEEDED

6mm Hexagon wrench
Utility knife
Phillips screwdriver
4mm Hexagon wrench

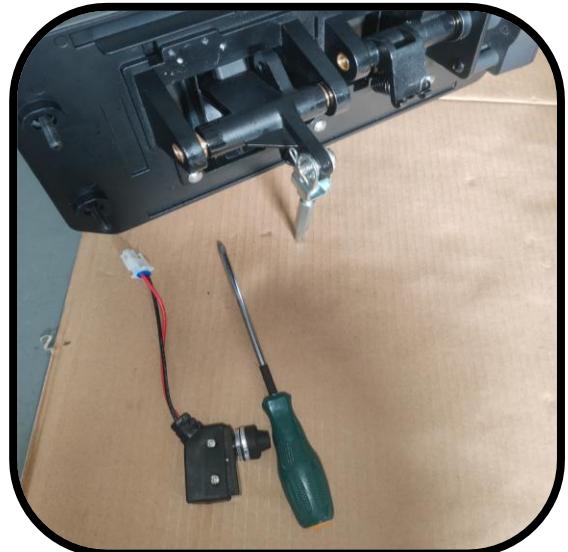


- Use a 4mm hex wrench to loosen and remove the screws securing the accelerator, then replace the accelerator.

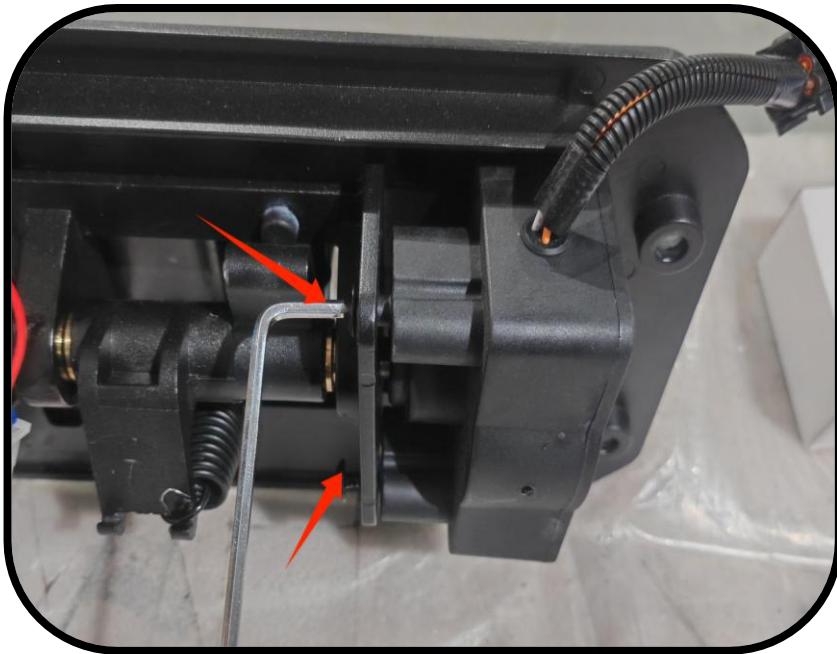

Read carefully all the safety statements before attempting any procedure.

Panel Replacement

- Remove the four screws on the panel.

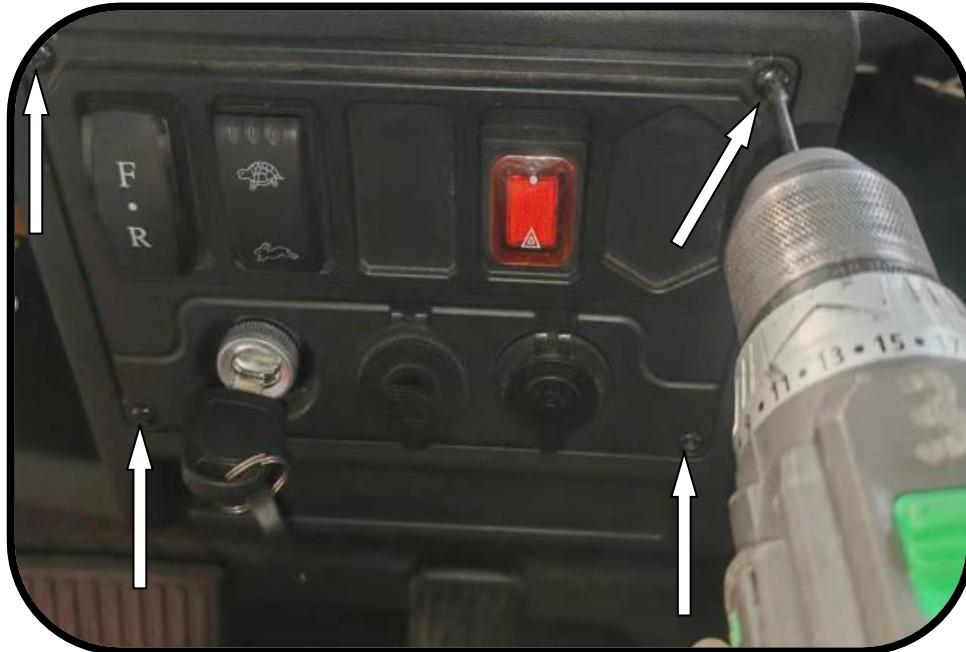


TOOL NEEDED

Phillips screwdriver

⚠️ WARNING:

Before working on electrical components, always disconnect the battery to prevent electric shock or short circuits.

- Disconnect the wires from each switch. Remove the switches to replace the center console panel.

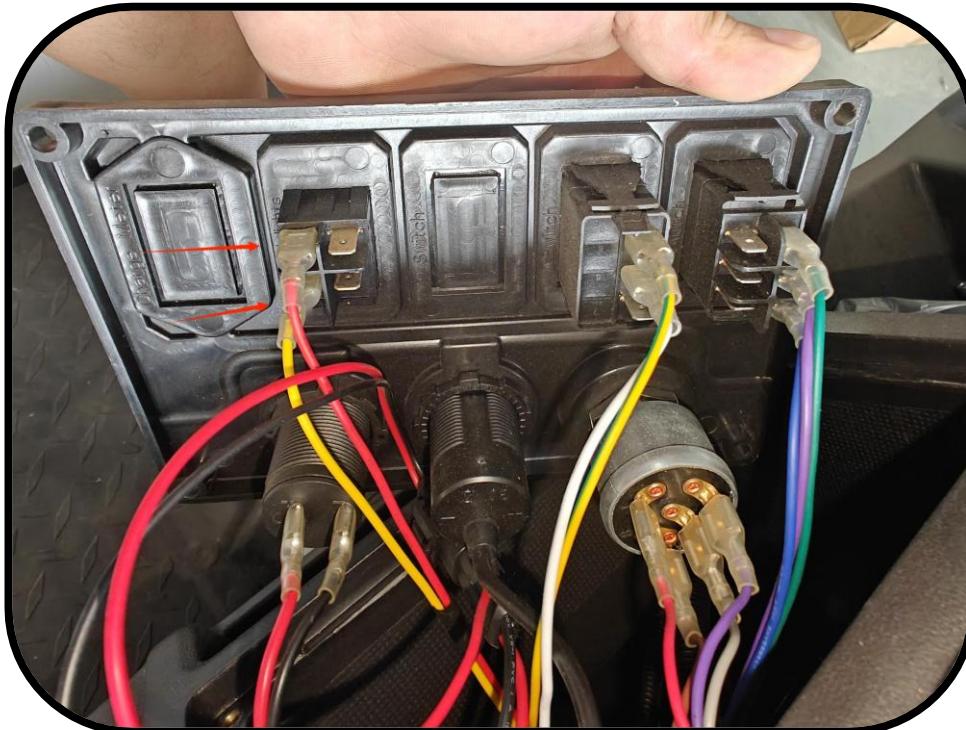


- Reverse these steps to install the replacement.

Forward/Reverse Switch Replacement

- Unscrew and detach the four cross screws from the control panel, as show in the picture. And remove the panel.

TOOL NEEDED


Phillips screwdriver

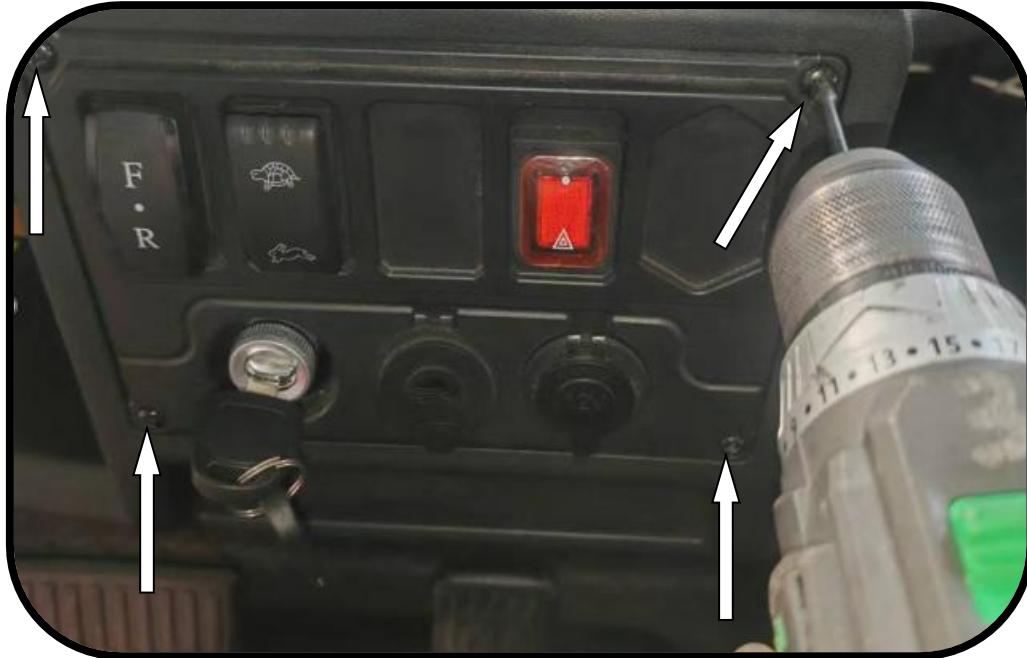

WARNING:

Before working on electrical components, always disconnect the battery to prevent electric shock or short circuits.

- Disconnect the wires from the gear switch in sequence: green, purple, and blue.

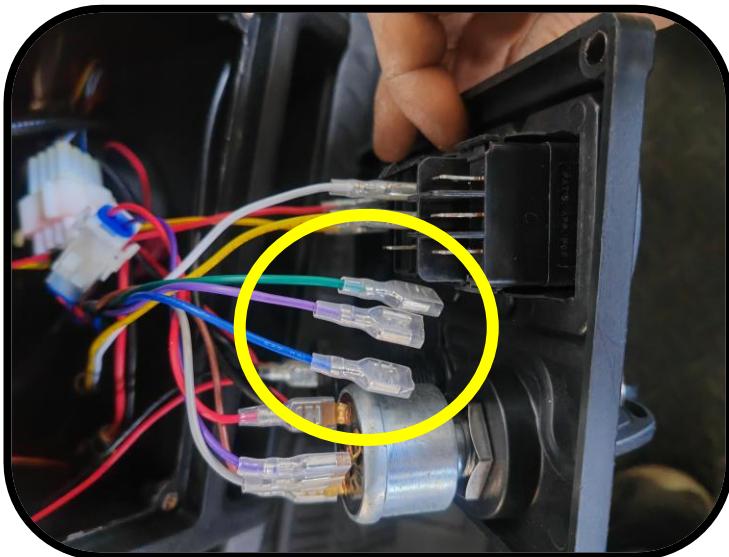

- Press the arrow direction to release the gear switch, ensuring to press the four tabs to push it out.
- Reverse these steps to install the replacement.


Read carefully all the safety statements before attempting any procedure.

Key Switch Replacement

- Use a Phillips screwdriver to loosen and remove the four screws securing the control panel.

TOOL NEEDED

Phillips screwdriver
needle-nose pliers

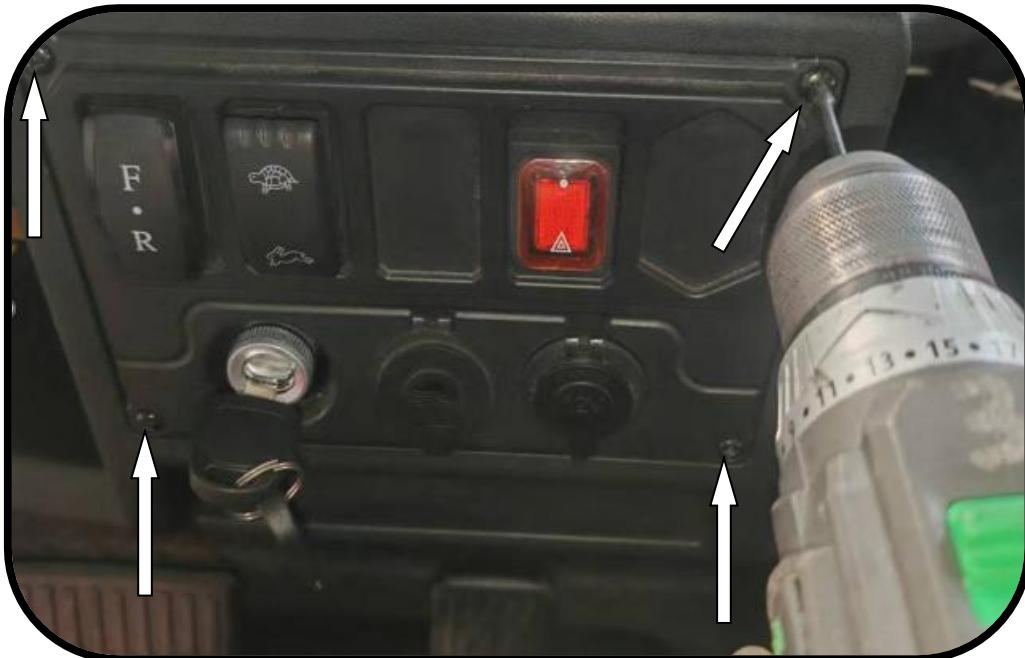

⚠️ WARNING:

Before working on electrical components, always disconnect the battery to prevent electric shock or short circuits.




Key Switch Replacement


- Disconnect the two sets of wires connected to the ignition switch.

TOOL NEEDED

Phillips screwdriver
needle-nose pliers

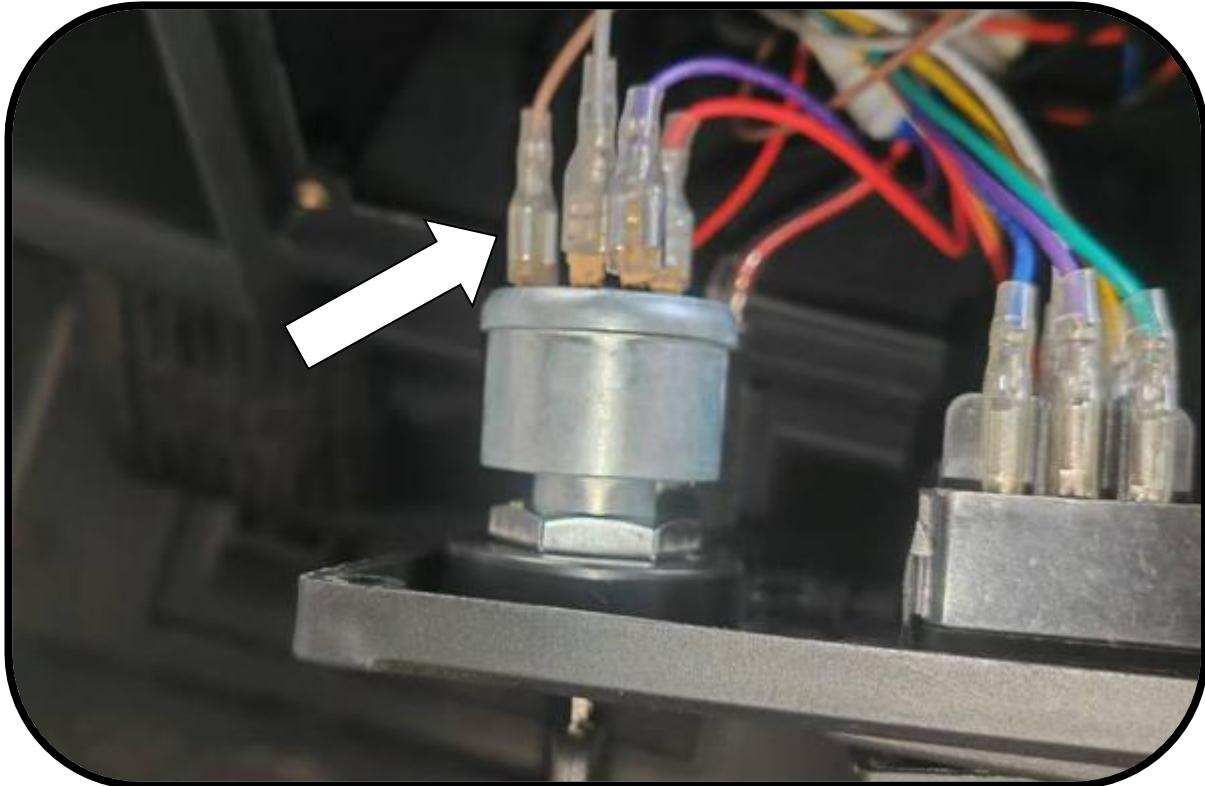

- Use needle-nose pliers to loosen the mounting base at the bottom of the ignition switch, then unscrew the front locking nut by hand. The ignition switch can then be removed.

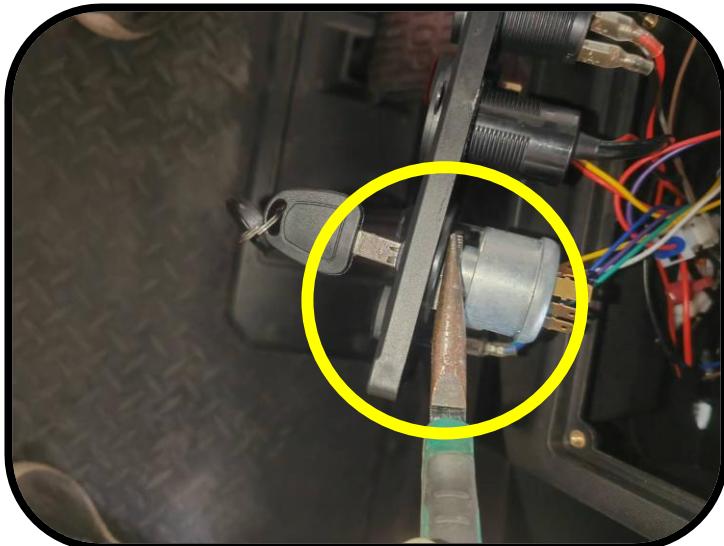

- Reverse these steps to install the replacement.


Read carefully all the safety statements before attempting any procedure.

Turtle/Rabbit Switch Replacement

- Unscrew and detach the four cross screws from the control panel, as show in the picture. Then remove the panel.

TOOL NEEDED



Phillips screwdriver

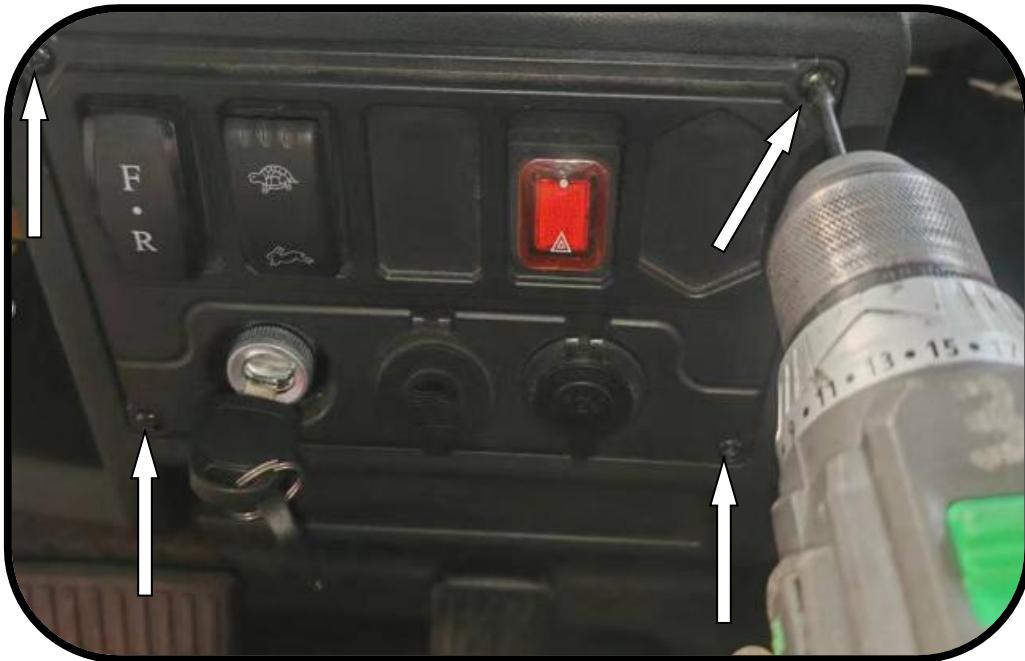

⚠️ WARNING:

Before working on electrical components, always disconnect the battery to prevent electric shock or short circuits.

- Disconnect the wires from the switch in sequence: Yellow, Green and White.

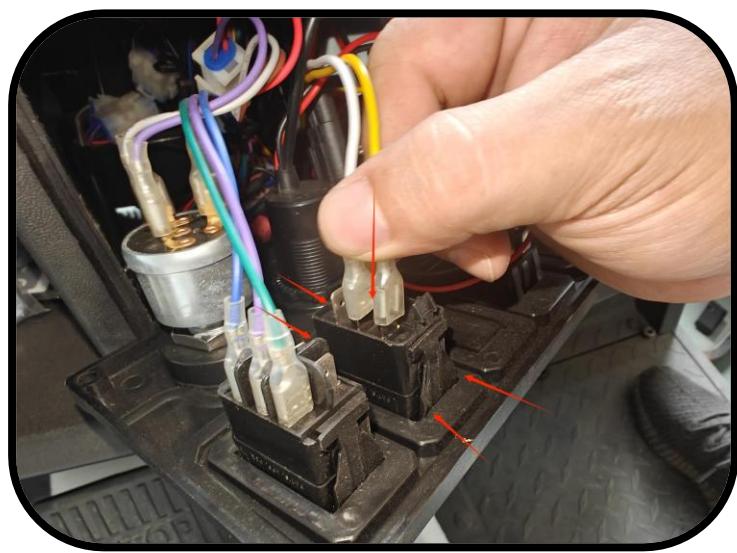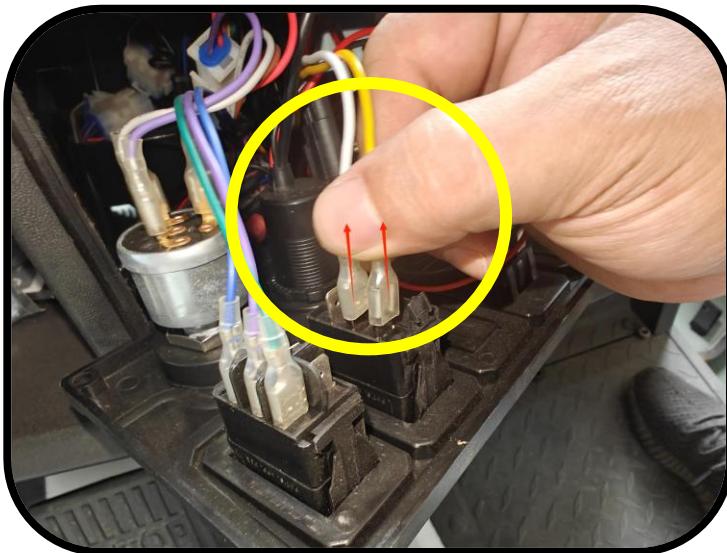


- Press the switch in the direction of the arrow and push it outwards to remove the switch.
- Reverse these steps to install the replacement.

Hazard Light Switch Replacement

- Unscrew and detach the four cross screws from the control panel, as show in the picture. Then remove the panel.

TOOL NEEDED



Phillips screwdriver

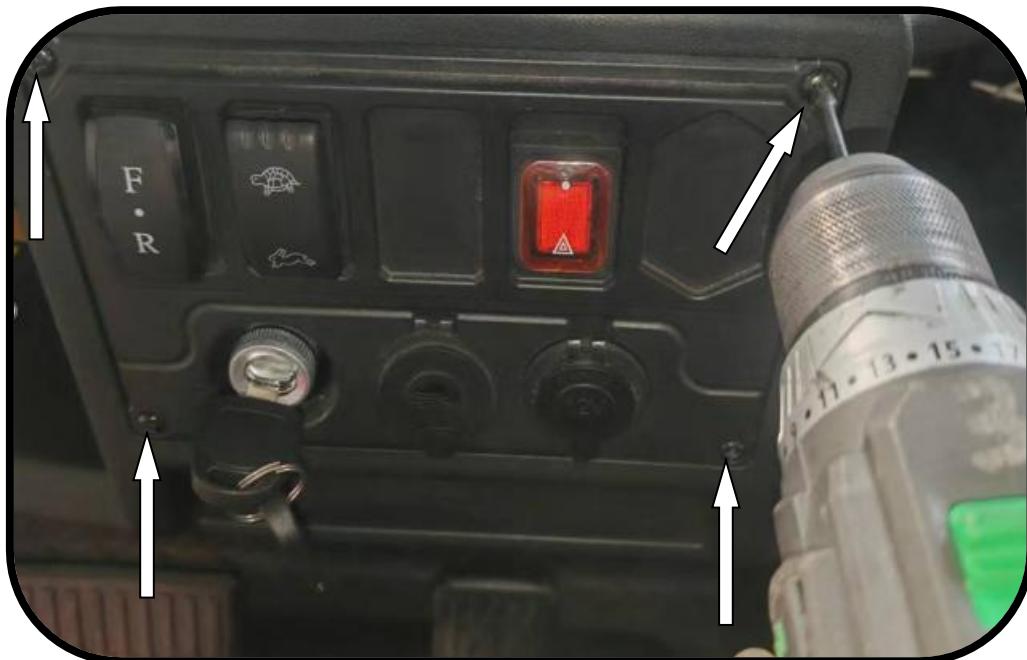

WARNING:

Before working on electrical components, always disconnect the battery to prevent electric shock or short circuits.

- Disconnect the wires from the switch in sequence: Red, Yellow

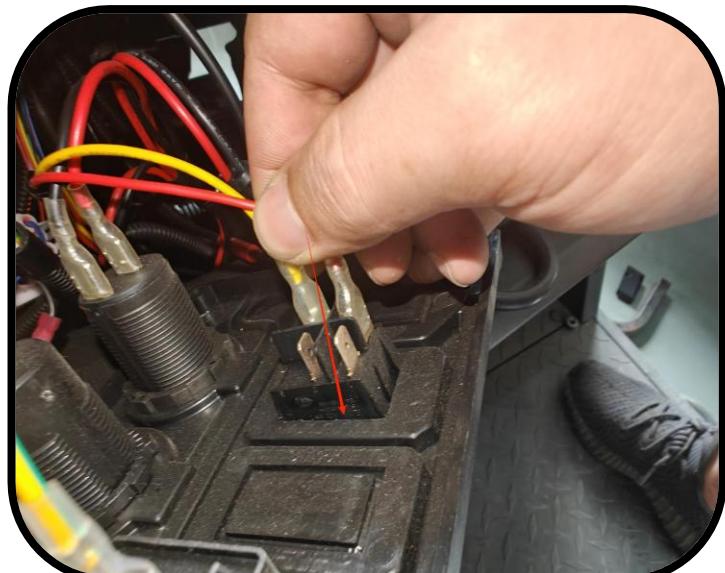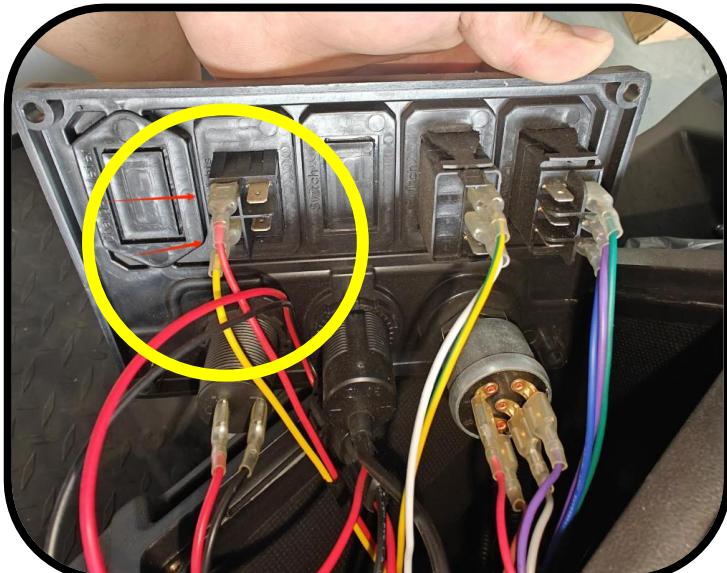

- Push the switch out to replace it.


Read carefully all the safety statements before attempting any procedure.

USB Switch Replacement

- Unscrew and detach the four cross screws from the control panel, as show in the picture. Then remove the panel.

TOOL NEEDED


Phillips screwdriver

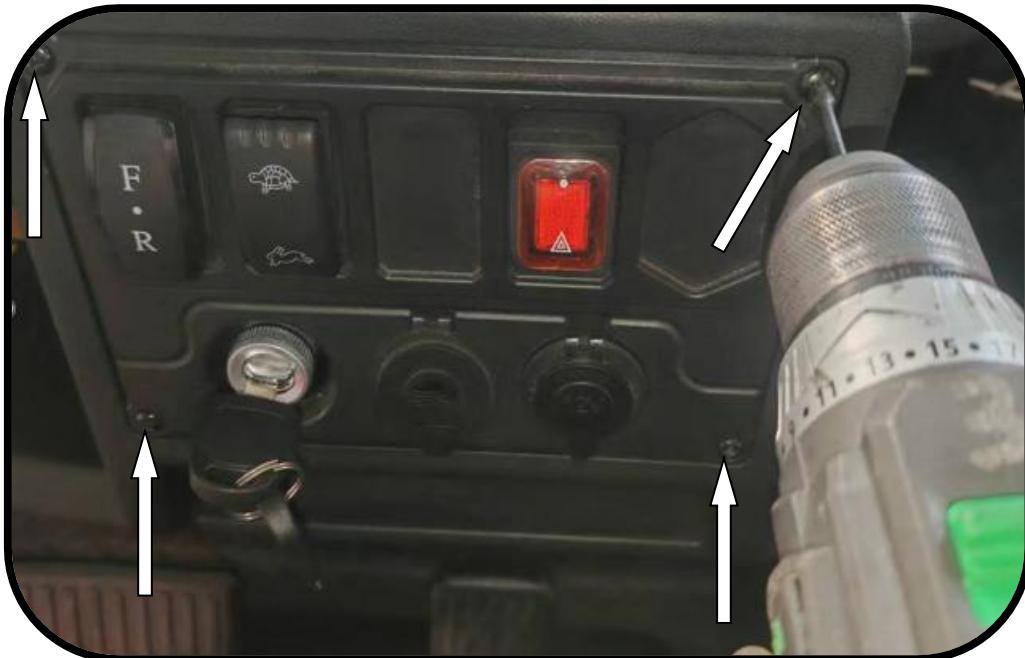

⚠️ WARNING:

Before working on electrical components, always disconnect the battery to prevent electric shock or short circuits.

- Unplug the 12V waterproof plug and the communication plug.

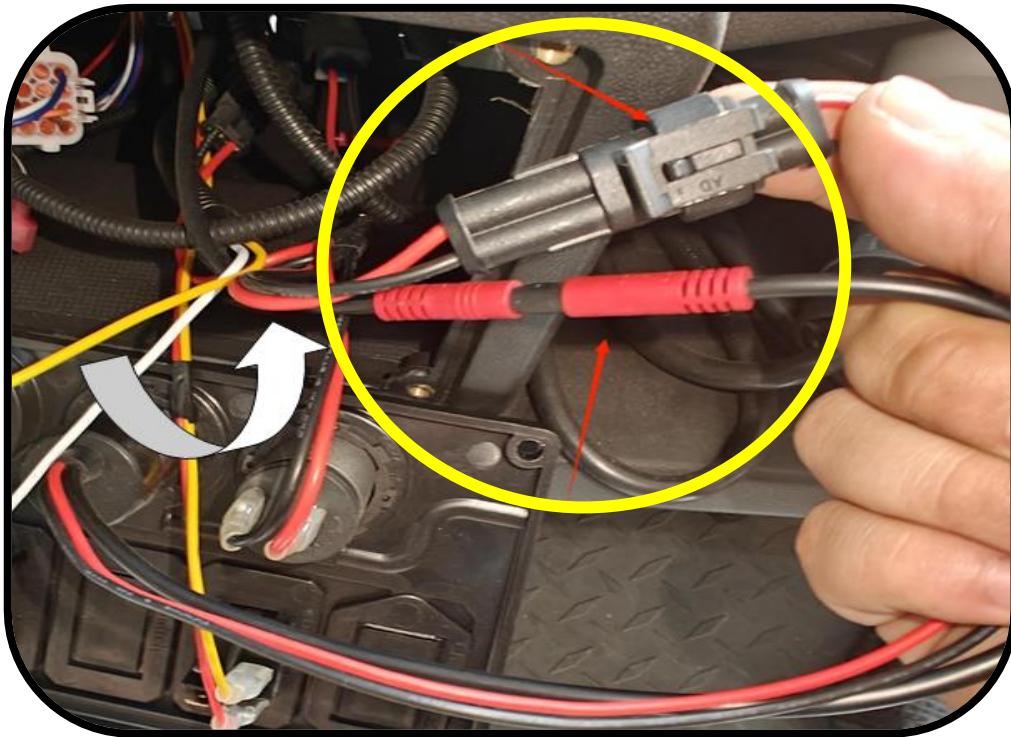


- Unscrew the back locking counterclockwise to remove the USB switch

Cigarette lighter Switch Replacement

- Unscrew and detach the four cross screws from the control panel, as show in the picture. Then remove the panel.

TOOL NEEDED

Phillips screwdriver

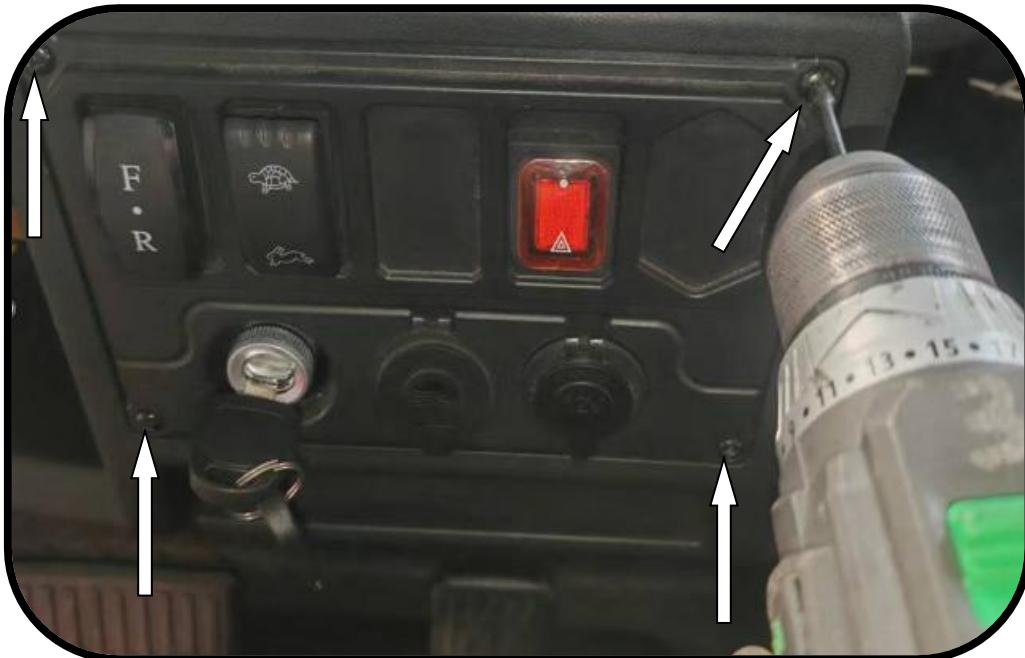

WARNING:

Before working on electrical components, always disconnect the battery to prevent electric shock or short circuits.

- Unplug the 12V waterproof plug (Red and Black)



- Unscrew the locking ring on the back counterclockwise to remove the cigarette lighter.

Read carefully all the safety statements before attempting any procedure.

Lithium Battery Replacement

- Open the battery compartment.
- Turn off the battery power.
- Remove the protective caps from the battery discharge port and charging port.



TOOL NEEDED

13 mm open-end wrench
10 mm open-end wrench
10 mm socket wrench

WARNING:

Before working on electrical components, always disconnect the battery to prevent electric shock or short circuits.


- Use a 13 mm open-end wrench to loosen and remove the screws on the battery discharge port, then disconnect the positive (+) and negative (−) terminals.



Read carefully all the safety statements before attempting any procedure.

Lithium Battery Replacement


- Use a 10 mm open-end wrench to loosen and remove the mounting screws on the charging port, then remove the charging cable.

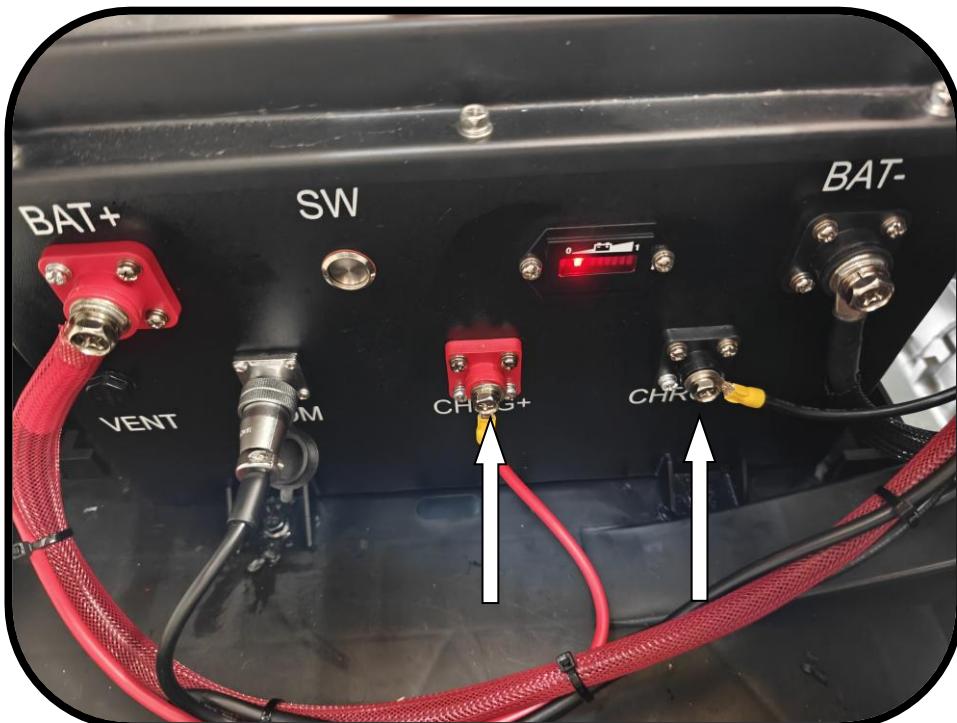

TOOL NEEDED

13 mm open-end wrench
10 mm open-end wrench
10 mm socket wrench

- Turn the CAN communication cable connector counterclockwise and remove the CAN cable.

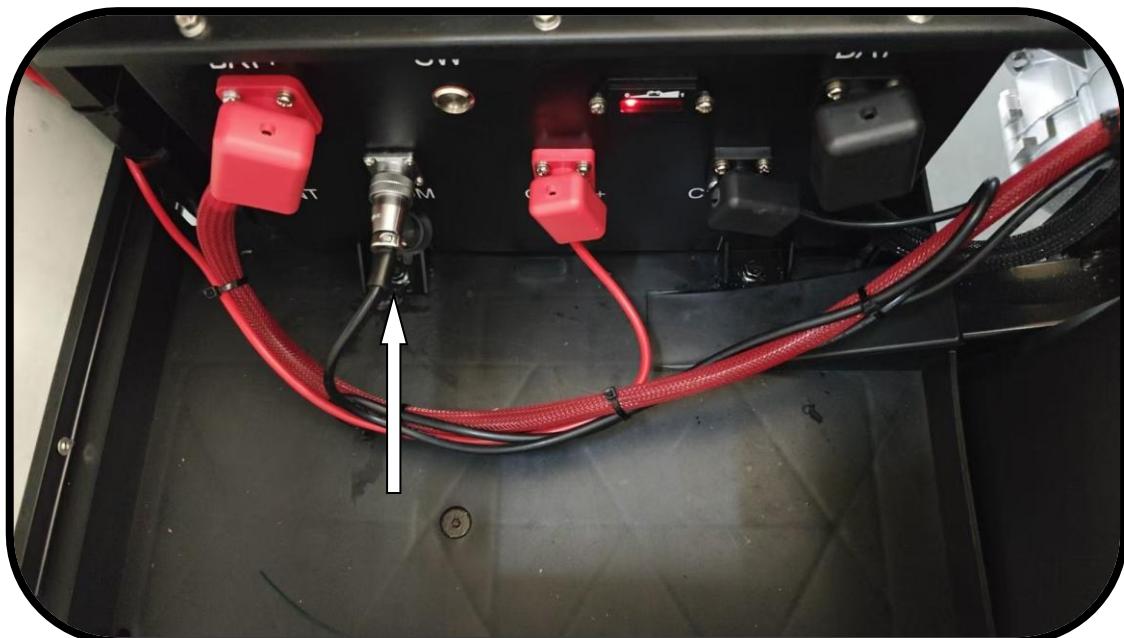

Read carefully all the safety statements before attempting any procedure.


Lithium Battery Replacement

- Use a 10 mm open-end wrench and a 10 mm socket wrench to loosen and remove the screws securing the battery.



TOOL NEEDED


13 mm open-end wrench
10 mm open-end wrench
10 mm socket wrench

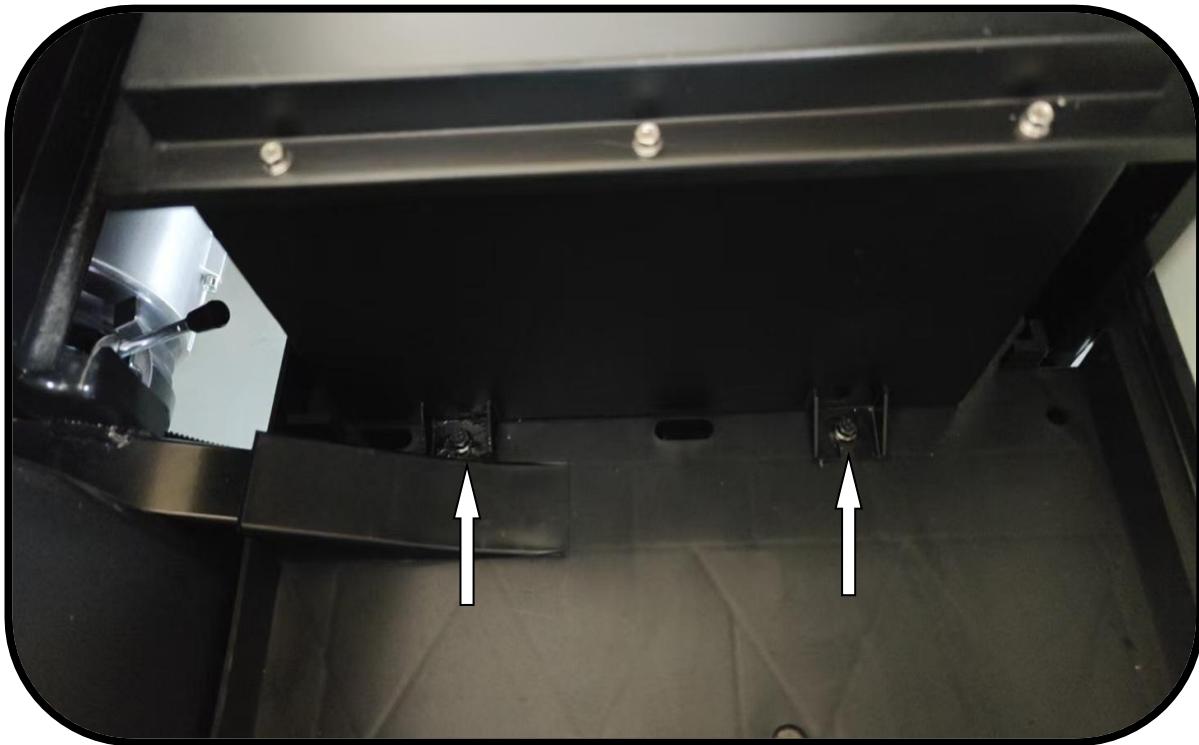

ELECTRICAL

Read carefully all the safety statements before attempting any procedure.

Lithium Battery Replacement

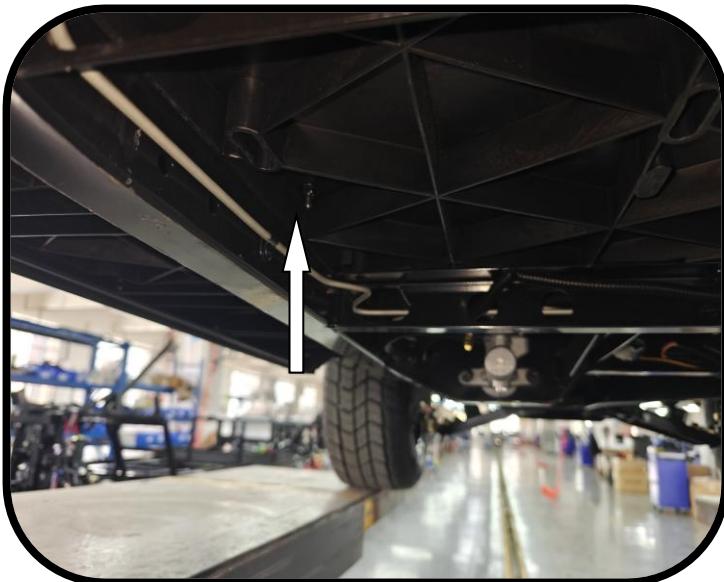

TOOL NEEDED

13 mm open-end wrench
10 mm open-end wrench
10 mm socket wrench




- The last four images show the locations of the screws securing the battery.
- Loosen all screws to remove the battery.
- Reverse the steps above to install the new battery.

Read carefully all the safety statements before attempting any procedure.

Charger Replacement

- First, cut off the cable tie that secures the charger cable with wire cutters.

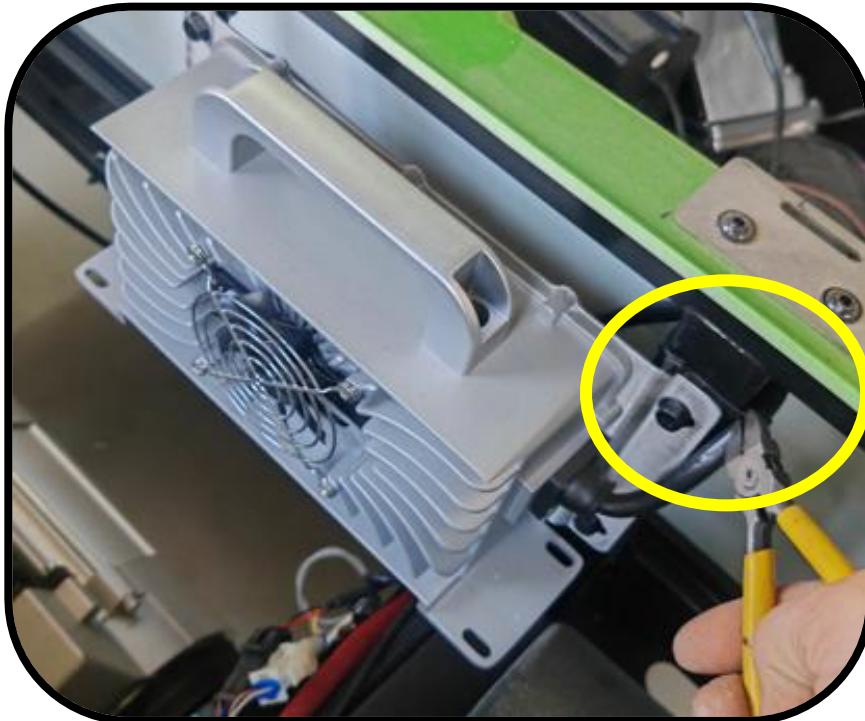


TOOL NEEDED

10mm Hexagon socket
Wire cutters

⚠️ WARNING:


Before working on electrical components, always disconnect the battery to prevent electric shock or short circuits.

- Use a 10mm hexagon socket to loosen and remove the four screws that secure the charger.

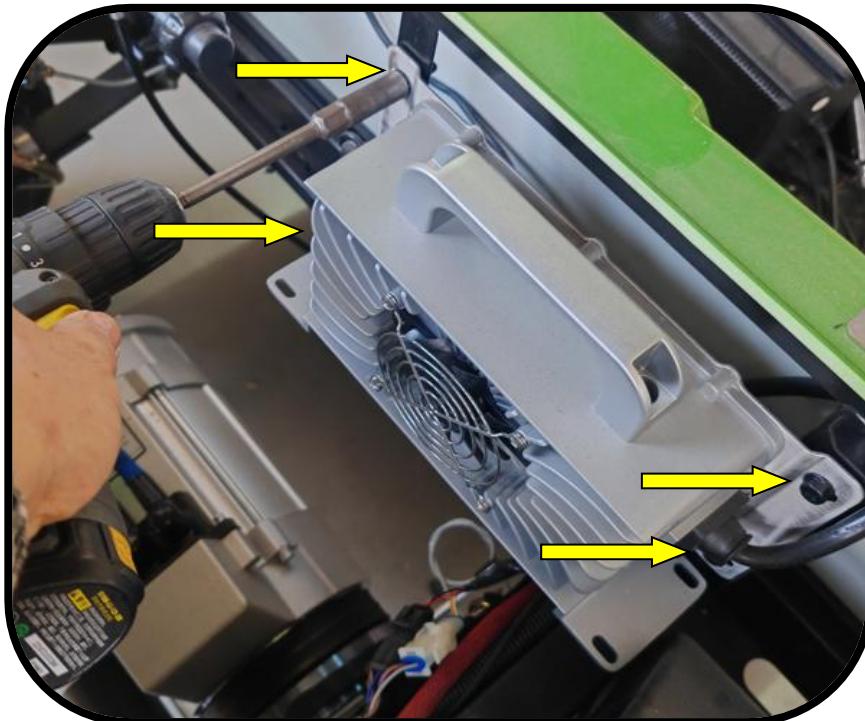


Charger Replacement

- Unplug the charger.

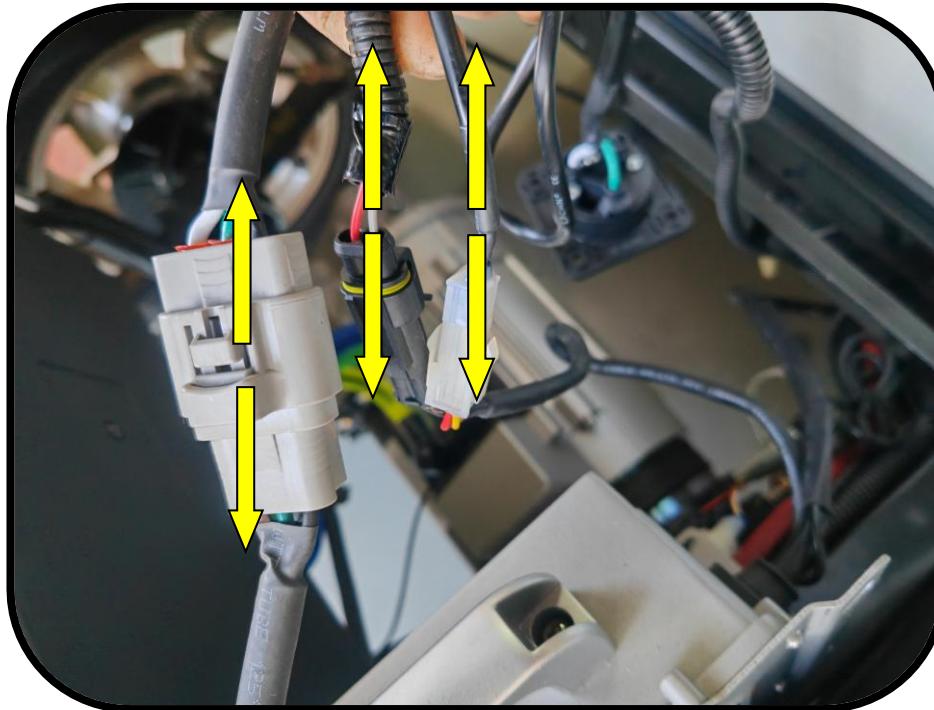

TOOL NEEDED

10mm Hexagon socket
Wire cutters

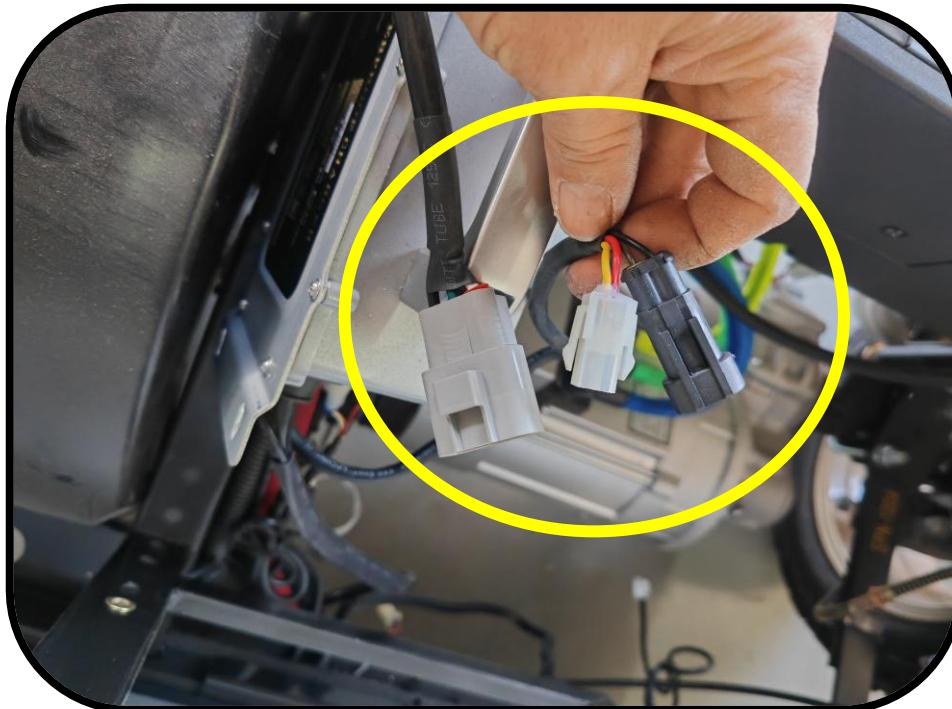


- Reverse these steps to install the replacement.

Read carefully all the safety statements before attempting any procedure.

Controller Replacement

- Use a Phillips screwdriver to remove the controller cover.

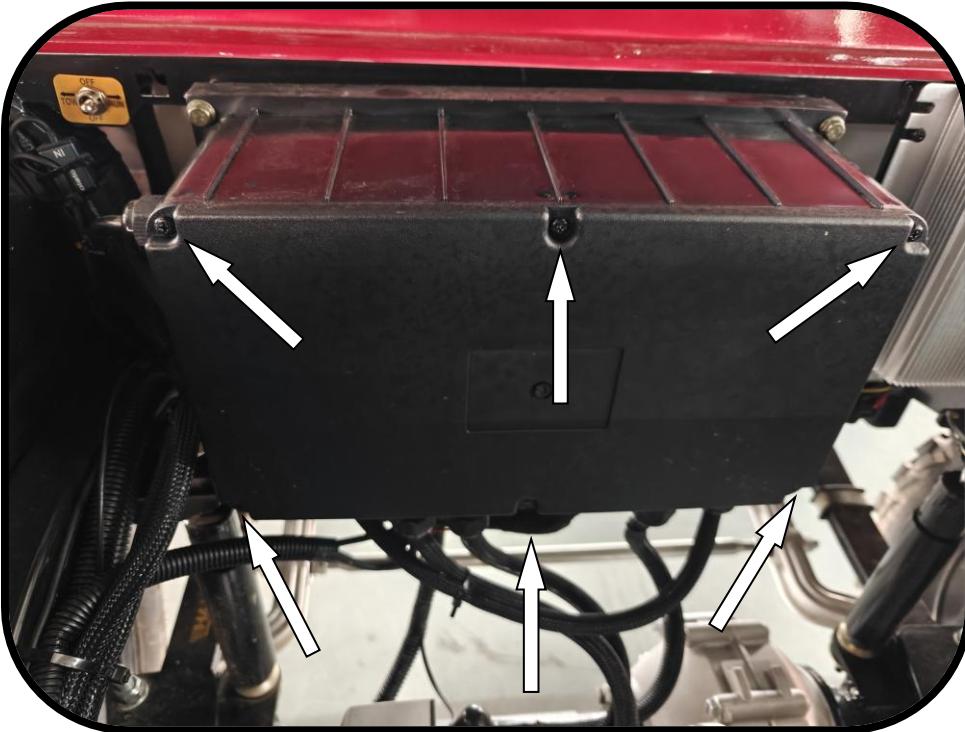



TOOL NEEDED

Phillips screwdriver
Flathead screwdriver
10 mm open-end wrench
13 mm open-end wrench

⚠️ WARNING:

Before working on electrical components, always disconnect the battery to prevent electric shock or short circuits.

- Use a flathead screwdriver to pry open and remove the controller plug.

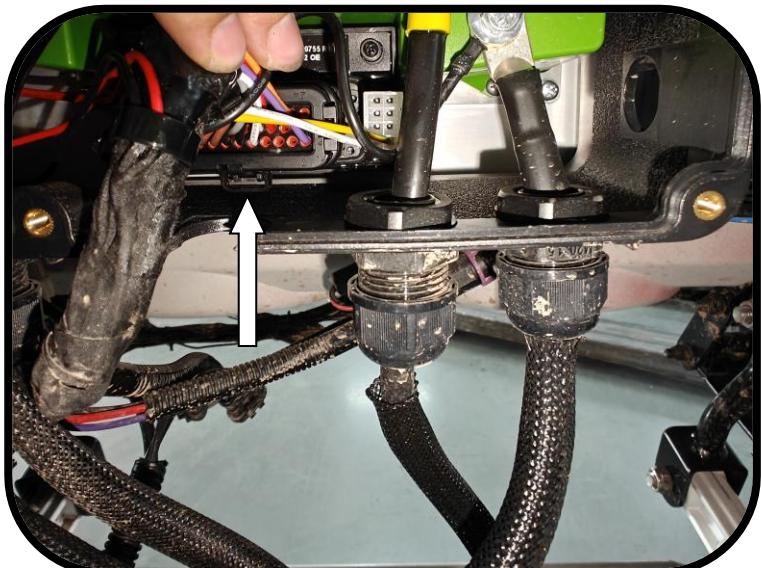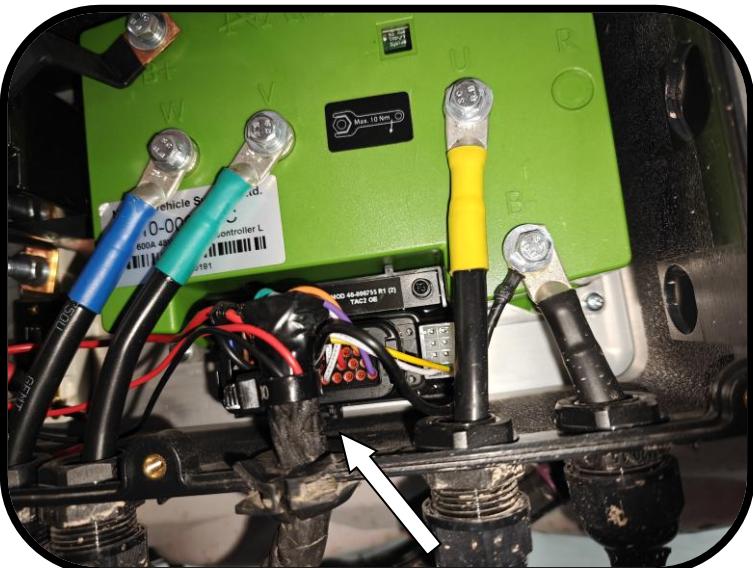


Controller Replacement


- Use a 10 mm open-end wrench to loosen and remove the U/V/W motor wires, copper connector, negative terminal, and screws.

TOOL NEEDED

Phillips screwdriver
Flathead screwdriver
10 mm open-end wrench
13 mm open-end wrench

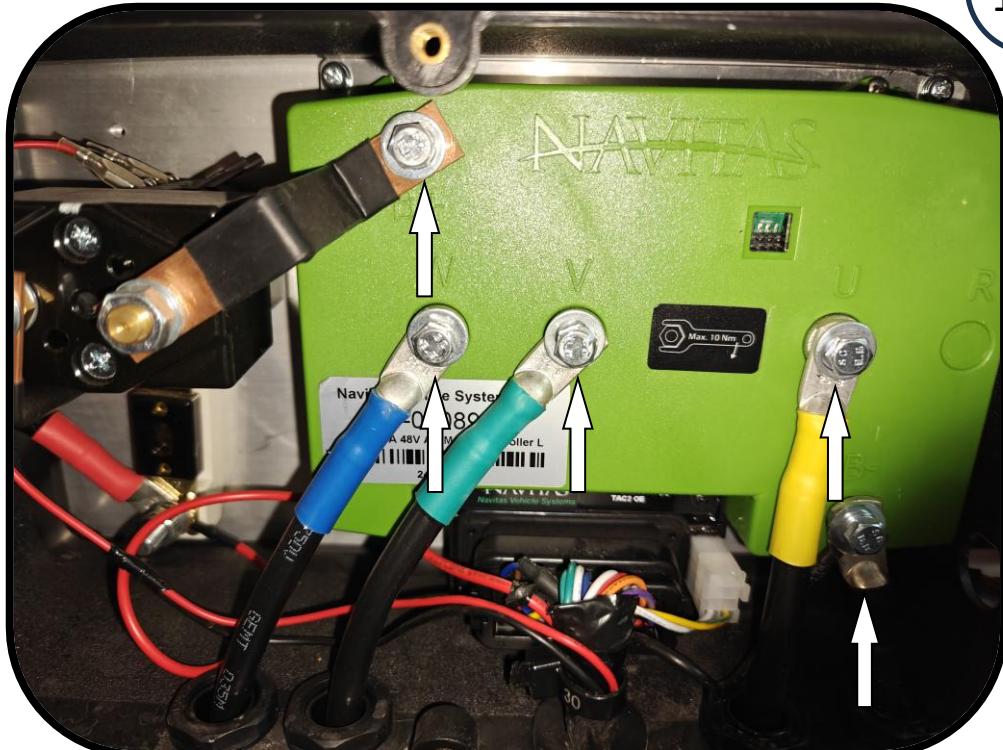

- Use a 13 mm open-end wrench to loosen and remove the nut on the fuse holder copper connector, then remove the connector.

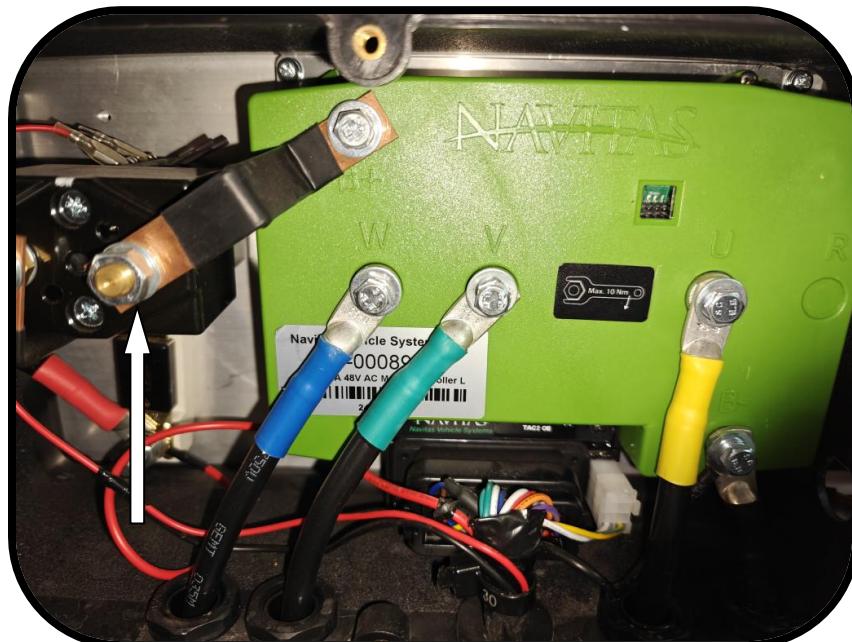


Read carefully all the safety statements before attempting any procedure.

Controller Replacement

- Use a Phillips screwdriver to loosen and remove the four screws securing the controller, then remove the controller.

TOOL NEEDED

Phillips screwdriver
Flathead screwdriver
10 mm open-end wrench
13 mm open-end wrench

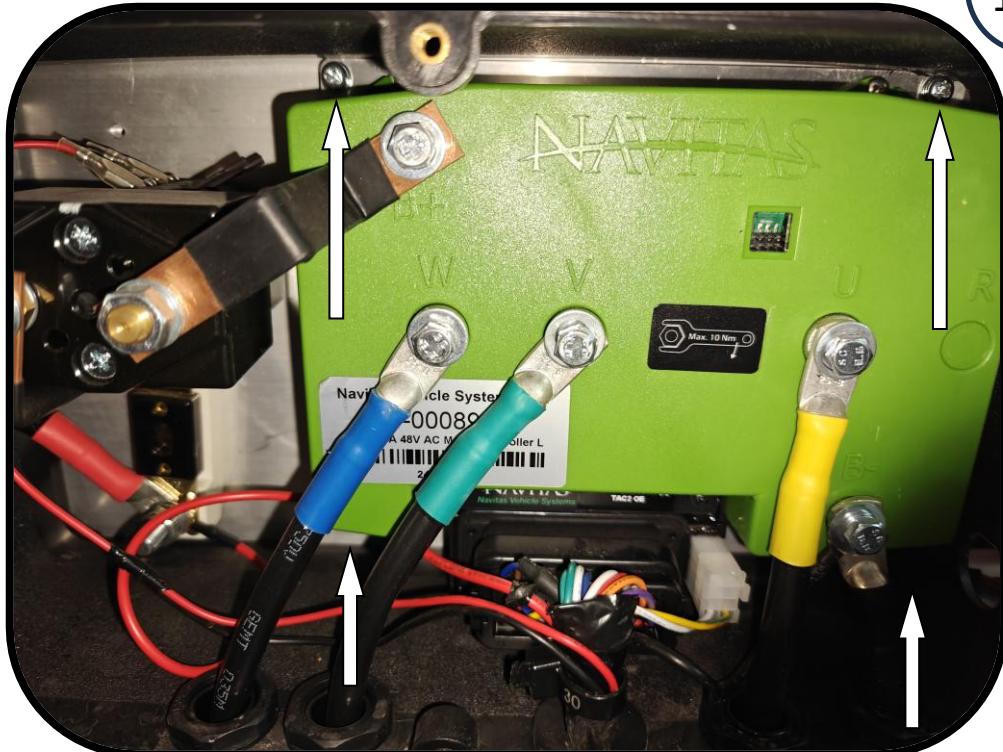


Voltage Converter Replacement

- Use a dikes to cut off the cable tie that secures the DC circuit.



- Unplug the DC connector.

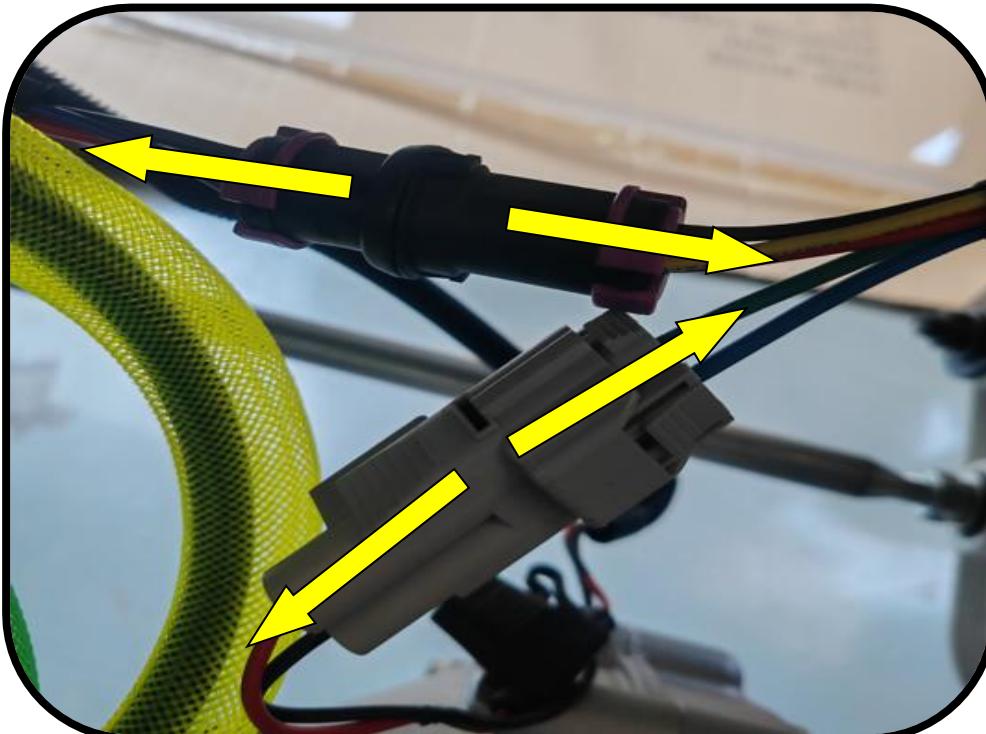

TOOL NEEDED

Phillips screwdriver
Dikes


WARNING:

Before working on electrical components, always disconnect the battery to prevent electric shock or short circuits.

Read carefully all the safety statements before attempting any procedure.

Voltage Converter Replacement

- Use a screwdriver to loosen the 4 screws that secure the DC and remove it.

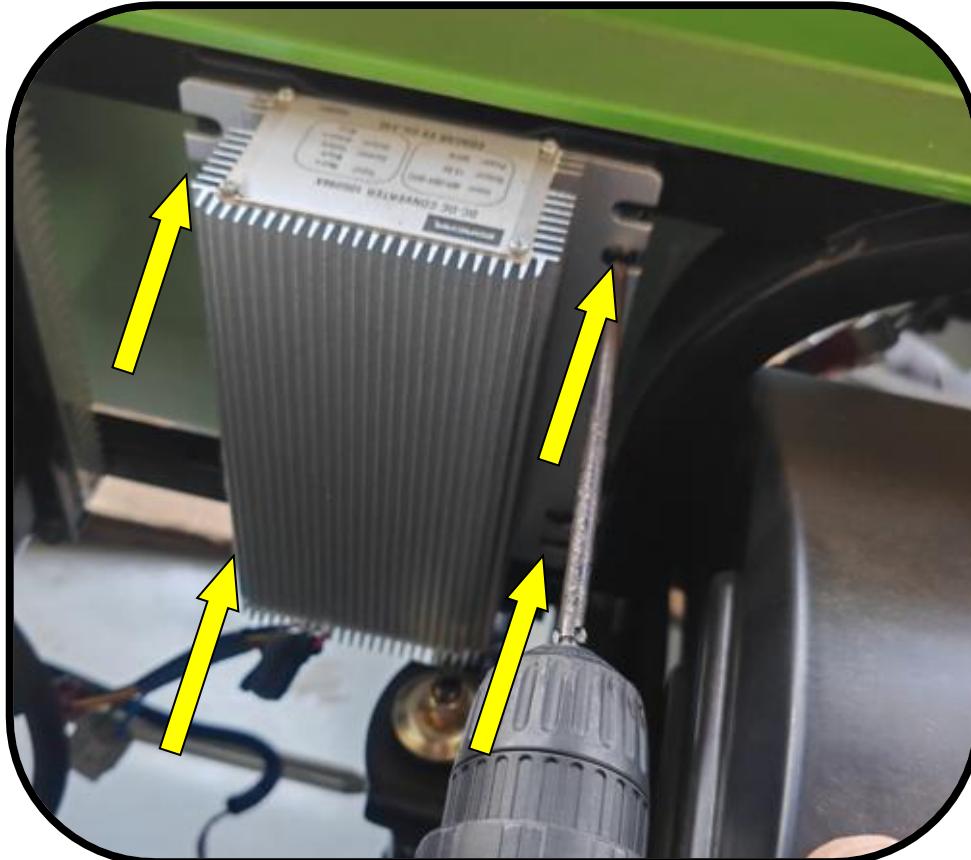

TOOL NEEDED

Phillips screwdriver
Dikes

- Reverse these steps to install the replacement.



SUSPENSION

Read carefully all the safety statements before attempting any procedure.

Front Shock replacement



⚠ CAUTION:

Always support the vehicle with jack stands before servicing suspension components. Use proper torque specifications when tightening fasteners and be cautious of spring tension to avoid injury.

TOOL NEEDED

15mm open-end wrench
15mm impact wrench

- Use a 15mm open-end wrench and a 15mm impact wrench to loosen and remove the bolts at the fastening points between the shock absorber and the frame.

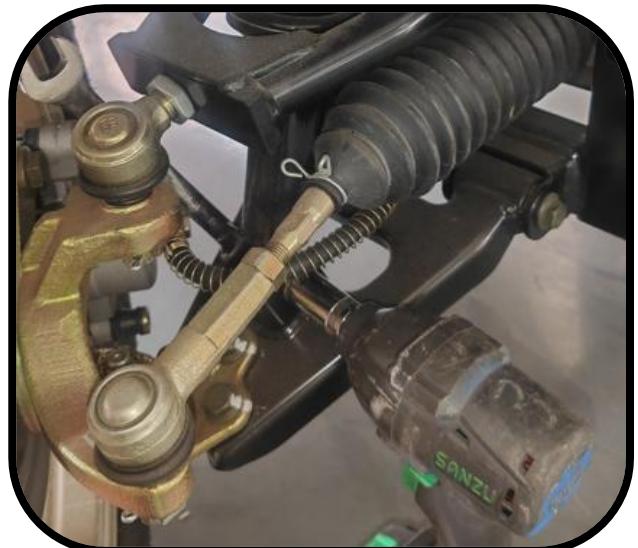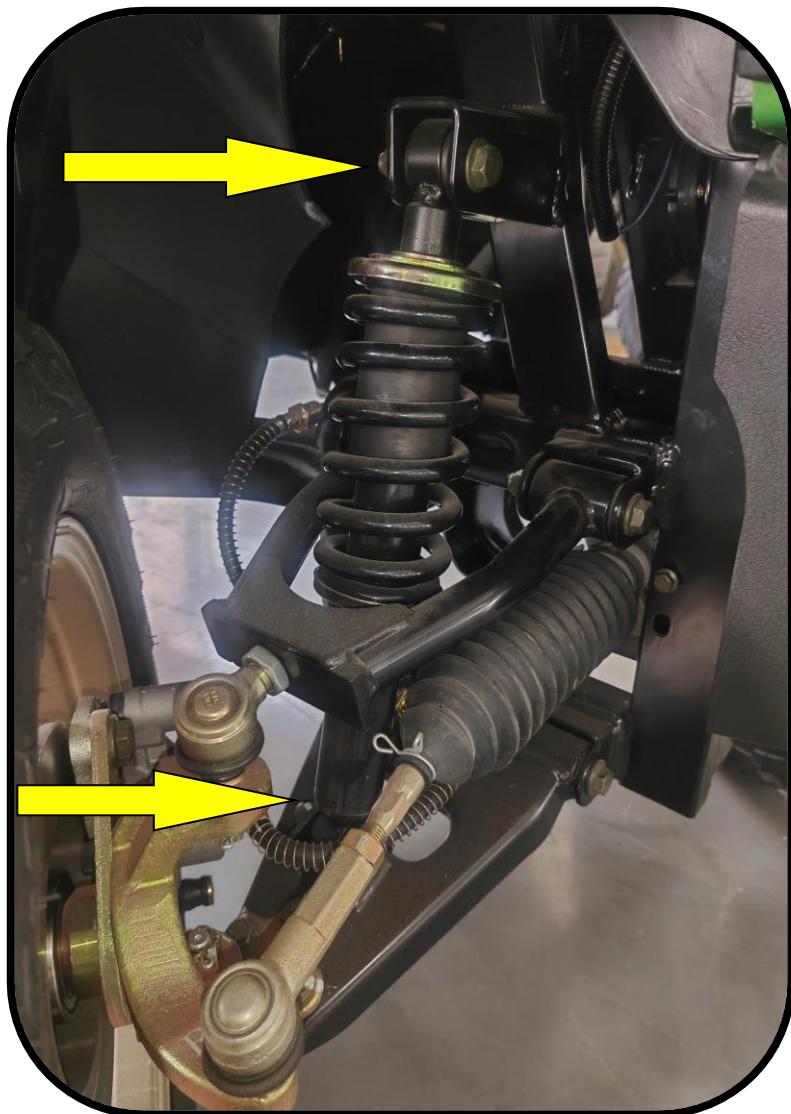

Read carefully all the safety statements before attempting any procedure.

Rear Shock Replacement


⚠ CAUTION:

Always support the vehicle with jack stands before servicing suspension components. Use proper torque specifications when tightening fasteners and be cautious of spring tension to avoid injury.

TOOL NEEDED

14mm open-end wrenches X2

- Use two 14mm open-end wrenches to loosen and remove the fastening nuts connecting the rear shock absorber to the frame and rear axle.

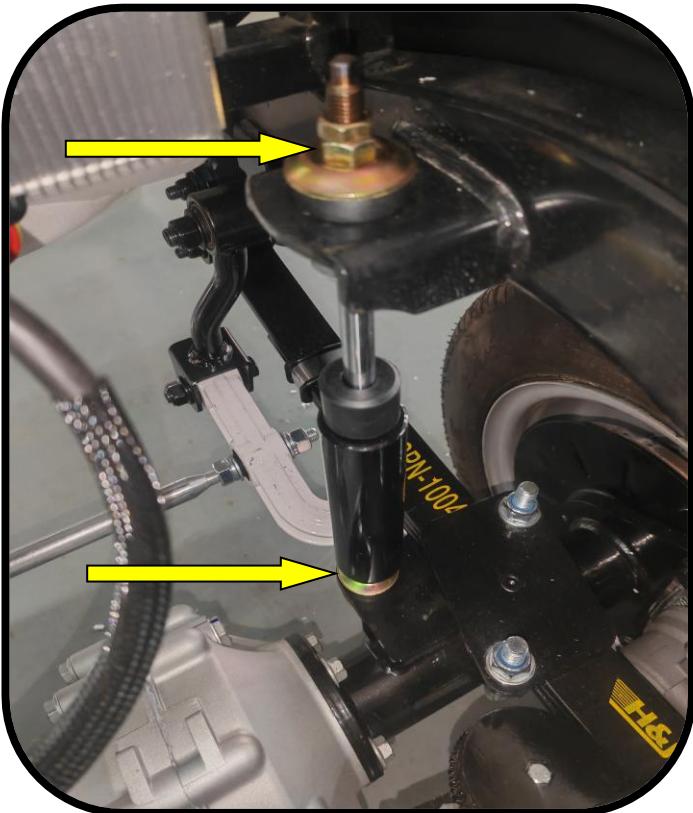

At the connection point between the rear shock absorber and the frame:

- Use the lower wrench to hold the bolt in place.
- Use the upper wrench to turn counterclockwise and loosen the upper nut.
- After removing the upper nut, turn the lower nut counterclockwise to loosen and remove it as well.

At the connection point between the rear shock absorber and the rear axle:

- Use the upper wrench to hold the bolt in place.
- Use the lower wrench to turn clockwise and loosen the lower nut.
- After removing the lower nut, turn the upper nut clockwise to loosen and remove it as well.



SUSPENSION

Read carefully all the safety statements before attempting any procedure.

Rear spring/bushing replacement

⚠ CAUTION:

Always support the vehicle with jack stands before servicing suspension components. Use proper torque specifications when tightening fasteners and be cautious of spring tension to avoid injury.


- Use a jack to lift the rear end of the cart.



TOOL NEEDED

15mm Hexagon socket
19mm Hexagon socket
15mm Hexagon wrench
Lubricant
Rubber Mallet Hammer
Floor Jack
Electric Wrench


- Use a 19mm hexagon socket to loosen and remove the steel plate locking screws.

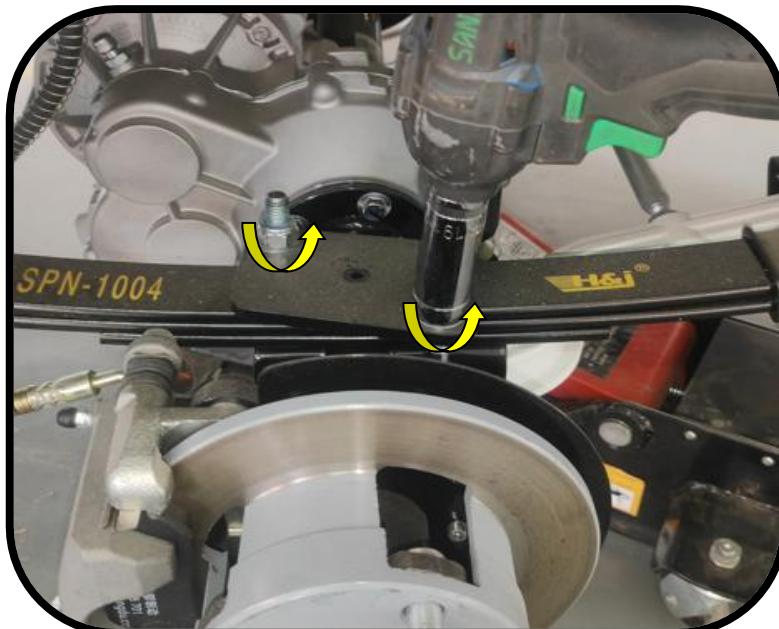


Read carefully all the safety statements before attempting any procedure.

Rear spring/bushing replacement

- Use a 15 hex socket and a 15mm open-end wrench to loosen the fixing screws at the front end of the steel plate (the frame side).

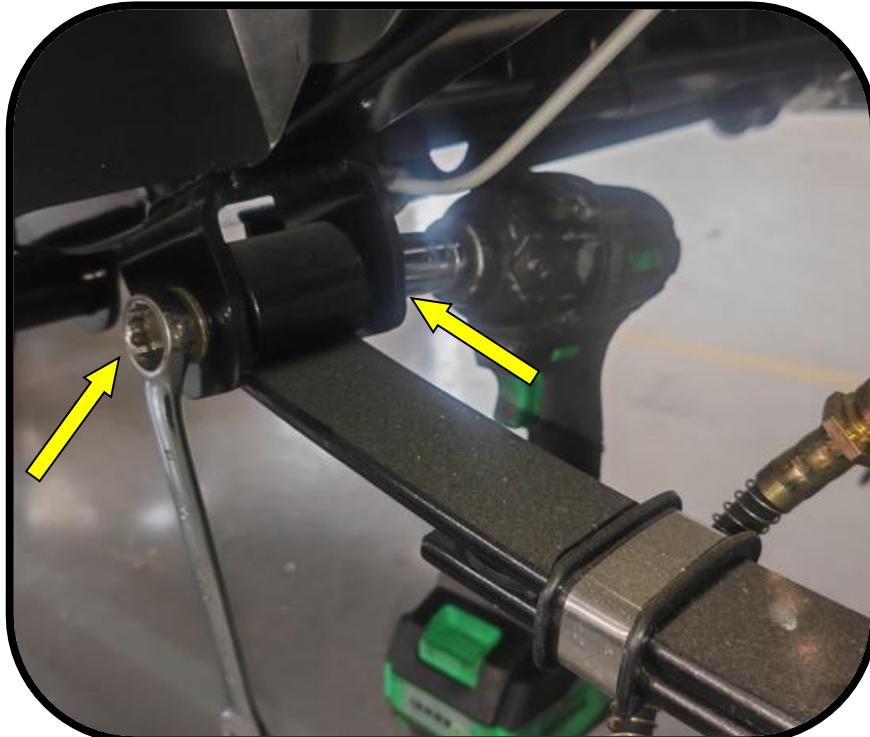

- Use a 15mm hex socket and a 15mm open-end wrench to loosen the fixing screws at the rear end of the steel plate (the side of the movable lock plate).

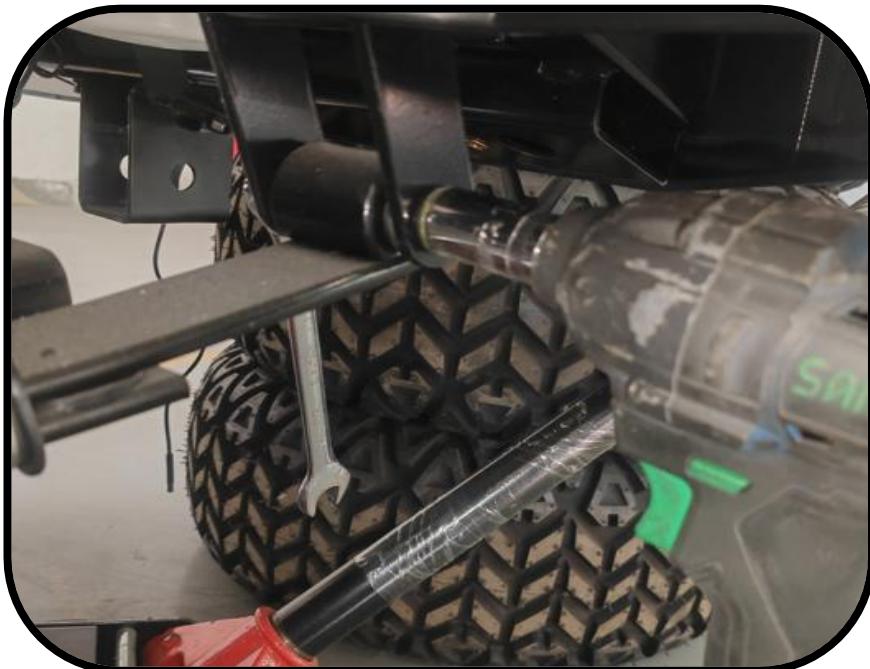

TOOL NEEDED

15mm Hexagon socket
19mm Hexagon socket
15mm Hexagon wrench
Lubricant
Rubber Mallet Hammer
Floor Jack
Electric Wrench

SUSPENSION

Read carefully all the safety statements before attempting any procedure.

Rear spring/bushing replacement

- Remove the screws at the front end of the steel plate (frame side) and the rear end of the steel plate (movable lock plate side) to take out the steel plate.



- Before installing the steel plate bushing, apply lubricating wax to the surface of the bushing to facilitate its insertion into the steel plate.



TOOL NEEDED

15mm Hexagon socket
19mm Hexagon socket
15mm Hexagon wrench
Lubricant
Rubber Mallet Hammer
Floor Jack
Electric Wrench

Read carefully all the safety statements before attempting any procedure.

Rear spring/bushing replacement

- Use a rubber hammer to gently tap the steel plate bushing into the steel plate.



TOOL NEEDED

15mm Hexagon socket
19mm Hexagon socket
15mm Hexagon wrench
Lubricant
Rubber Mallet Hammer
Floor Jack
Electric Wrench

- Reverse these steps to install the replacement.

SUSPENSION

Read carefully all the safety statements before attempting any procedure.

Front Suspension Alignment

⚠ CAUTION:


Always support the vehicle with jack stands before servicing suspension components. Use proper torque specifications when tightening fasteners and be cautious of spring tension to avoid injury.

TOOL NEEDED

Large Triangle Square
Tape Measure
17mm Hexagon Wrench
13mm Hexagon Wrench
15/16 Wrenches x2

To adjust the front tilt angle, ensure you are on a flat surface.


- Place a triangle square with one side flat against the ground and the other side positioned against the area indicated by the arrow above the tire.
- Observe the gap (between the tire and the triangle square) as shown by the arrow. Adjust the front wheel camber to achieve a gap of 5-10mm.

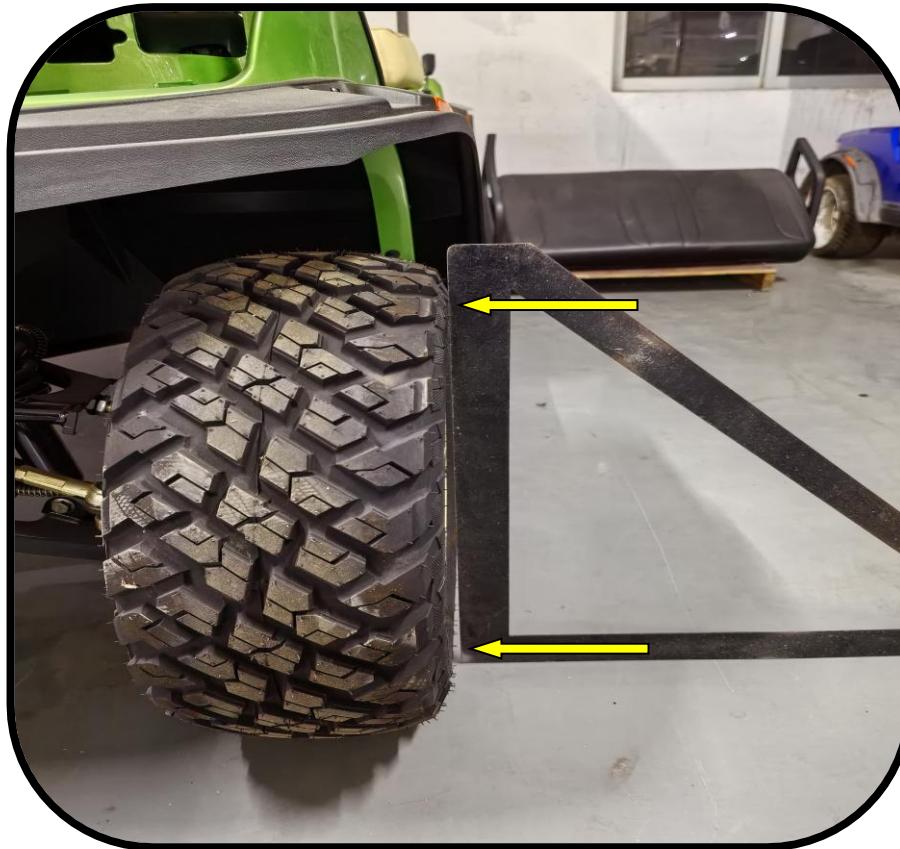

Read carefully all the safety statements before attempting any procedure.

Front Suspension Alignment

- Use a 15/16 wrench to adjust the two adjustment nuts as shown in the picture to achieve the desired tilt angle. Tighten both end nuts to complete the camber adjustment.

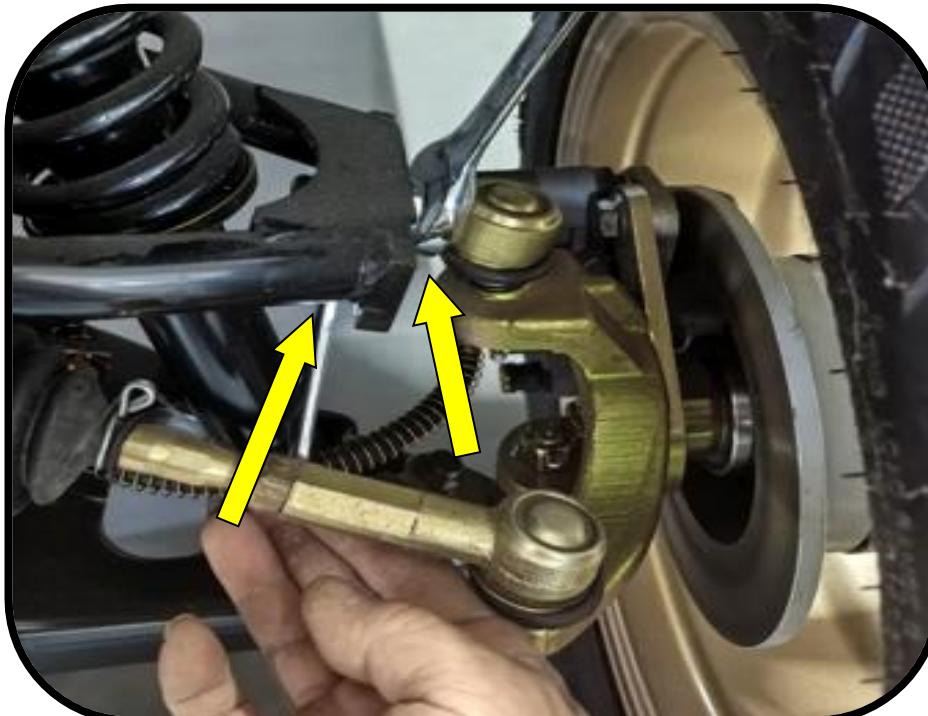

TOOL NEEDED

Large Triangle Square
Tape Measure
17mm Hexagon Wrench
13mm Hexagon Wrench
15/16 Wrenches x2



SUSPENSION

Read carefully all the safety statements before attempting any procedure.

Front Suspension Alignment

- Before adjusting the toe, mark the same height on both the left and right front tires using a marker.



- Measure the distance between the marks at the front of the front tires.



TOOL NEEDED

Large Triangle Square

Tape Measure

17mm Hexagon Wrench

13mm Hexagon Wrench

15/16 Wrenches x2

Read carefully all the safety statements before attempting any procedure.

Front Suspension Alignment

- Move the vehicle backward until the marks made on the front tires are visible at the rear of the front wheels. Then, measure the distance between the two marks at the rear of the front tires.



TOOL NEEDED

Large Triangle Square
Tape Measure
17mm Hexagon Wrench
13mm Hexagon Wrench
15/16 Wrenches x2



- Use a 13mm open-end hex wrench to adjust the protrusion length of the inner ball joint on the steering gear.
- Use a 17mm open-end hex wrench to hold the outer ball joint of the steering gear in place.
- By adjusting the protrusion length of the inner ball joints at both ends of the steering gear, ensure that the distance between the rear and front marks on the front tires is 3-5mm greater at the rear.
- Once the adjustment is complete, tighten the fixed nut on the inner ball joint.

Lower Control Arm Rod End Replacement

⚠ CAUTION:

Always support the vehicle with jack stands before servicing suspension components. Use proper torque specifications when tightening fasteners and be cautious of spring tension to avoid injury.


TOOL NEEDED

10mm socket wrench
10mm open-end wrench
15mm open-end wrench
15mm socket wrench
15mm impact wrench
jack

- Use a jack to lift the front end of the vehicle, ensuring the front wheels are off the ground.




- Use a 15mm socket wrench and a 15mm impact wrench to loosen and remove the fastening bolts connecting the lower control arm to the frame.

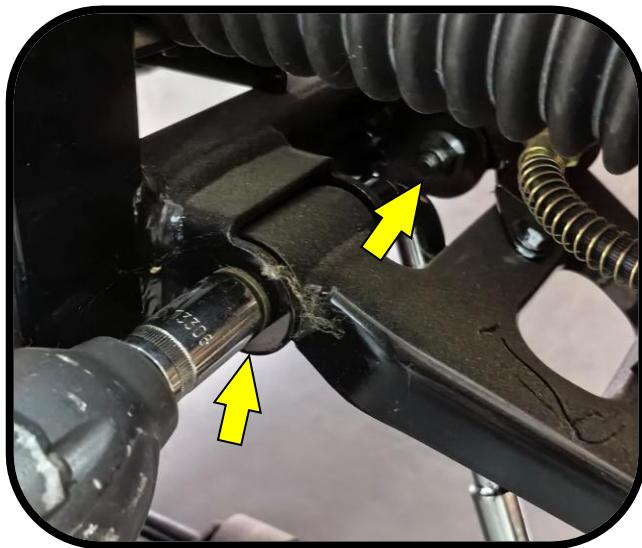

Read carefully all the safety statements before attempting any procedure.

Lower Control Arm Rod End Replacement

- Use a 15mm socket wrench and a 15mm impact wrench to loosen and remove the fastening bolts connecting the lower control arm to the lower ball joint.

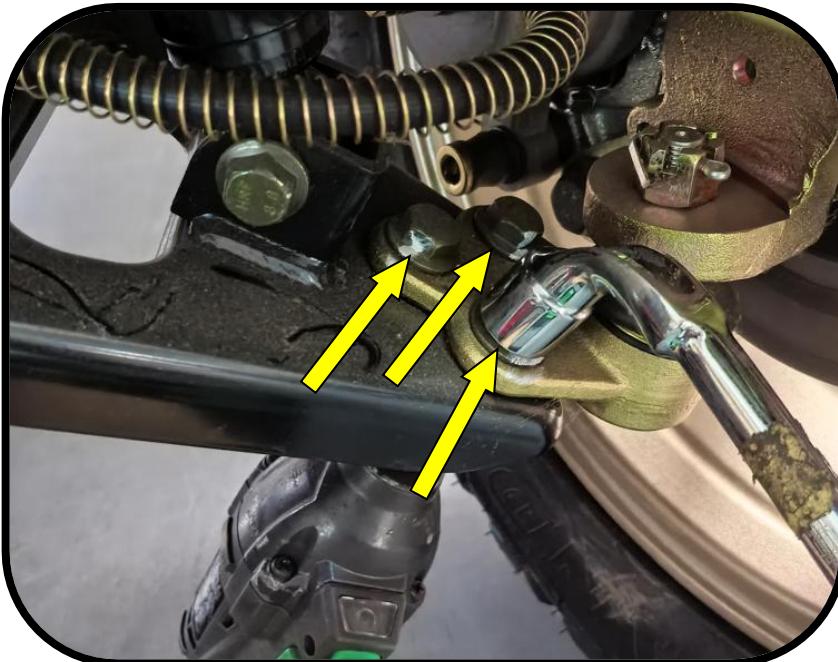

- Use a 10mm open-end wrench and a 10mm socket wrench to loosen and remove the fastening bolts securing the lower control arm to the oil pipe bracket.



TOOL NEEDED


10mm socket wrench
10mm open-end wrench
15mm open-end wrench
15mm socket wrench
15mm impact wrench
jack

SUSPENSION

Read carefully all the safety statements before attempting any procedure.

Lower Control Arm Rod End Replacement

- Use a 15mm socket wrench and a 15mm impact wrench to loosen and remove the fastening bolts connecting the lower control arm to the front shock absorber.

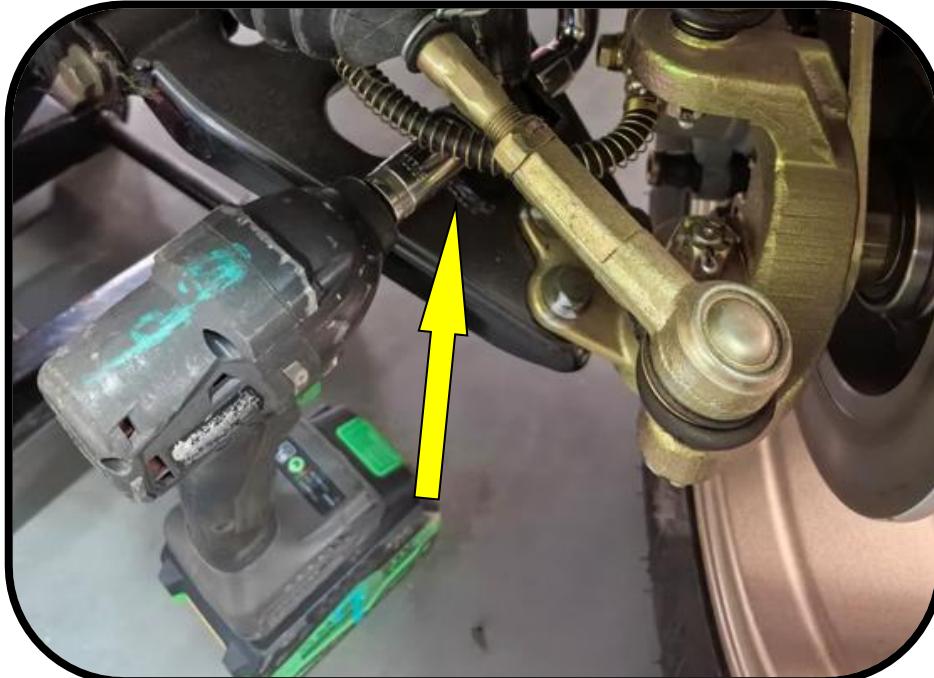

TOOL NEEDED

10mm socket wrench
10mm open-end wrench
15mm open-end wrench
15mm socket wrench
15mm impact wrench
jack



- Reverse these steps to install the replacement.

Read carefully all the safety statements before attempting any procedure.

Upper Control Arm Rod End Replacement

⚠ CAUTION:

Always support the vehicle with jack stands before servicing suspension components. Use proper torque specifications when tightening fasteners and be cautious of spring tension to avoid injury.


- Use a jack to lift the front end of the vehicle, ensuring the front wheels are off the ground.



TOOL NEEDED

Jack
Rubber mallet
needle-nose pliers
15mm impact wrench
15mm offset socket wrench
15mm open-end wrench
18mm open-end wrench
15/16 open-end wrench ×2

- Use two 15/16" open-end wrenches to loosen and remove the fastening nut connecting the upper control arm to the upper ball joint.

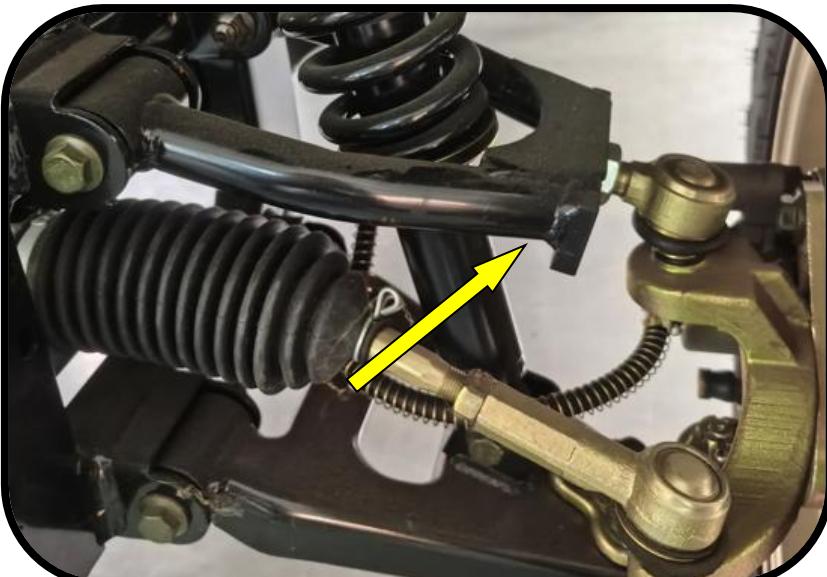


SUSPENSION


Read carefully all the safety statements before attempting any procedure.

Upper Control Arm Rod End Replacement

- As shown in the image, use the right-side wrench to hold the bolt in place while applying upward force on the left-side wrench to loosen the nut.

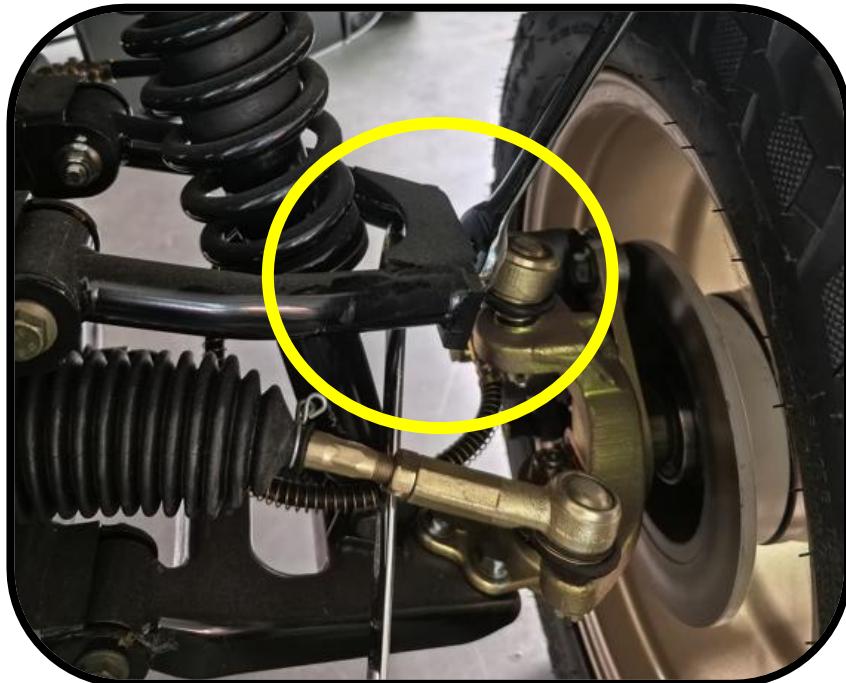

- Use a 15mm open-end wrench and a 15mm impact wrench to loosen and remove the fastening bolts connecting the upper control arm to the frame.

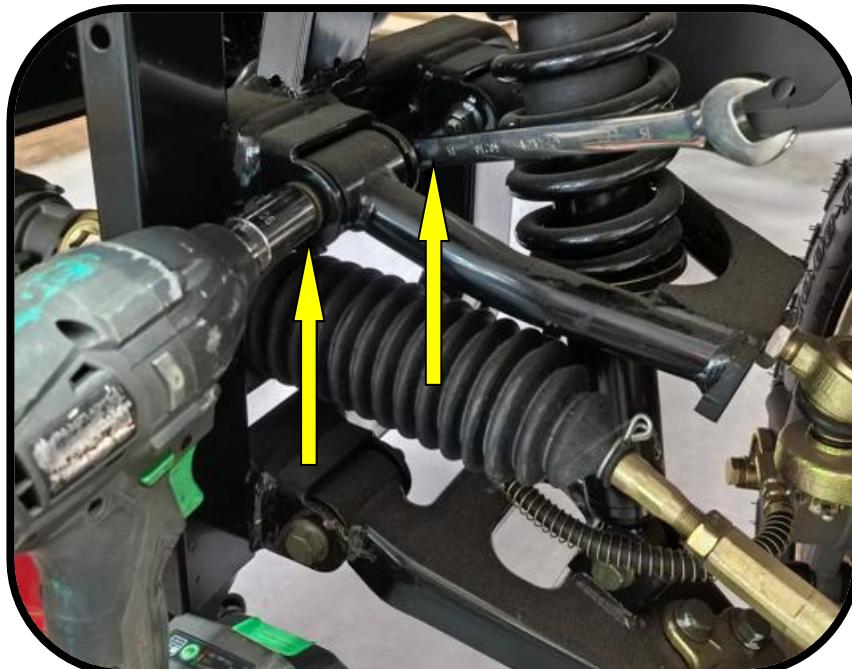


TOOL NEEDED

Jack
Rubber mallet
needle-nose pliers
15mm impact wrench
15mm offset socket wrench
15mm open-end wrench
18mm open-end wrench
15/16 open-end wrench ×2

Read carefully all the safety statements before attempting any procedure.

Upper Control Arm Rod End Replacement

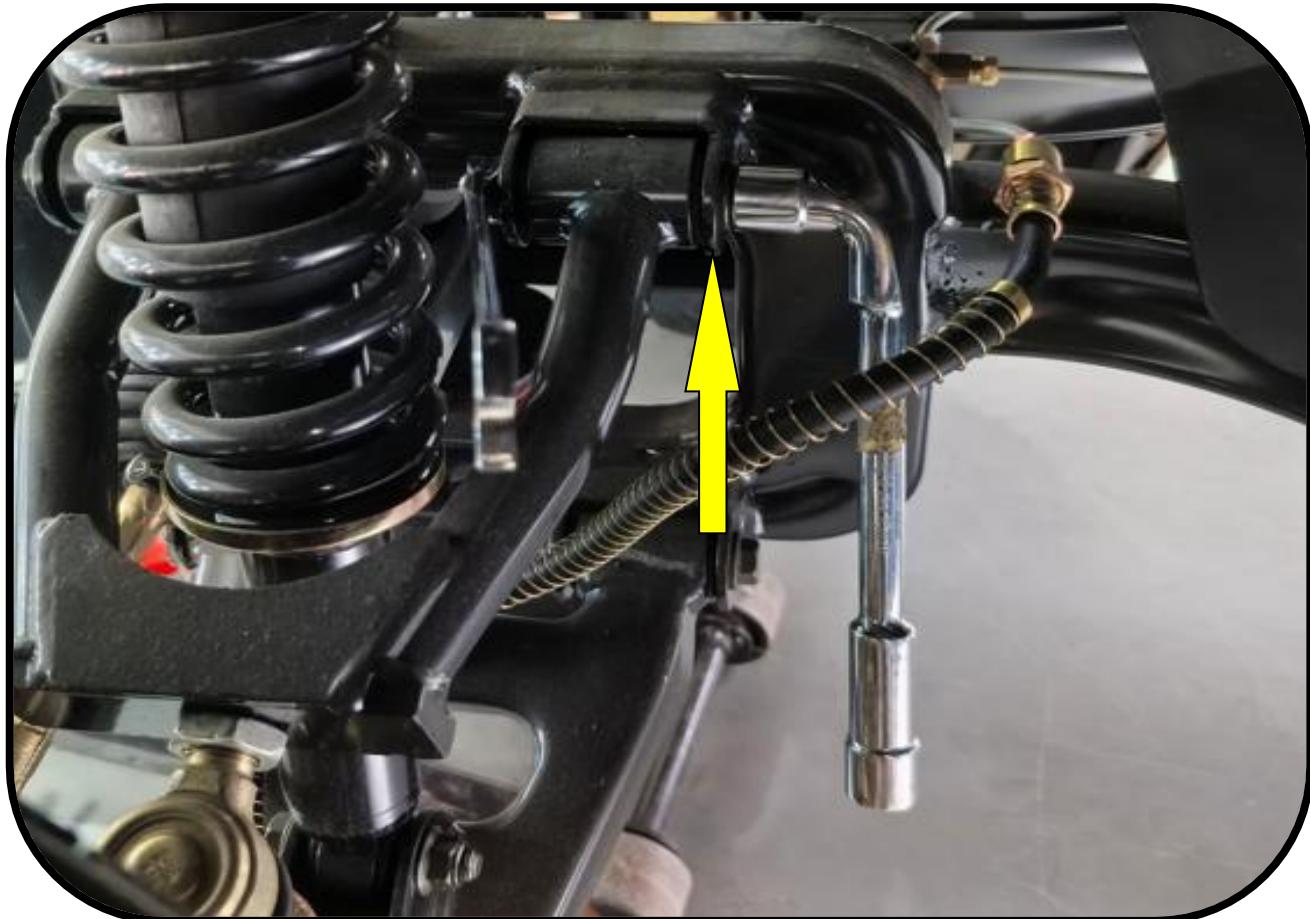

- Reverse these steps to install the replacement.

Steering Rack Replacement


⚠ CAUTION:

Always support the vehicle with jack stands before servicing suspension components. Use proper torque specifications when tightening fasteners and be cautious of spring tension to avoid injury.

TOOL NEEDED

13mm sockets
13mm Elbow Wrench
17 mm Open-End Wrench
Needle-Nose Pliers
Rubber Mallet

- Use a 13 mm socket to loosen and remove the fastening bolt at the connection point between the universal joint and the steering gear.

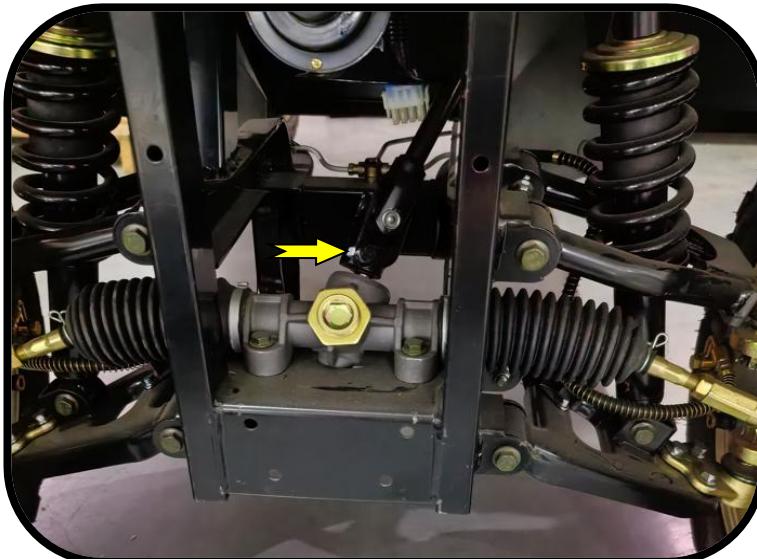

- Use needle-nose pliers to remove the R-clip pin from the nut securing the outer tie rod of the steering gear to the steering knuckle.



Read carefully all the safety statements before attempting any procedure.


Steering Rack Replacement

- Use a 17 mm open-end wrench to loosen and remove the slotted nut securing the outer tie rod of the steering gear to the steering knuckle.



TOOL NEEDED

13mm sockets
13mm Elbow Wrench
17 mm Open-End Wrench
Needle-Nose Pliers
Rubber Mallet

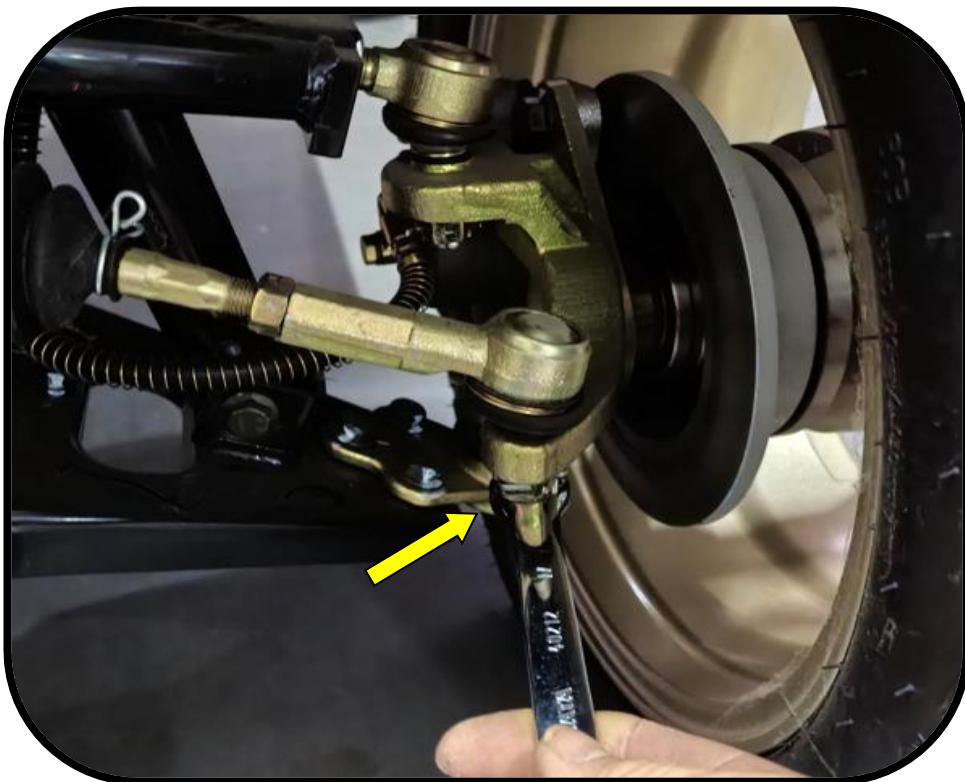


Steering Rack Replacement

- Use a rubber mallet to tap the connection point between the steering knuckle and the outer tie rod of the steering gear to loosen the linkage.



- Use a 13 mm socket to loosen and remove the bolts and nuts securing the steering gear, then take out the steering gear.

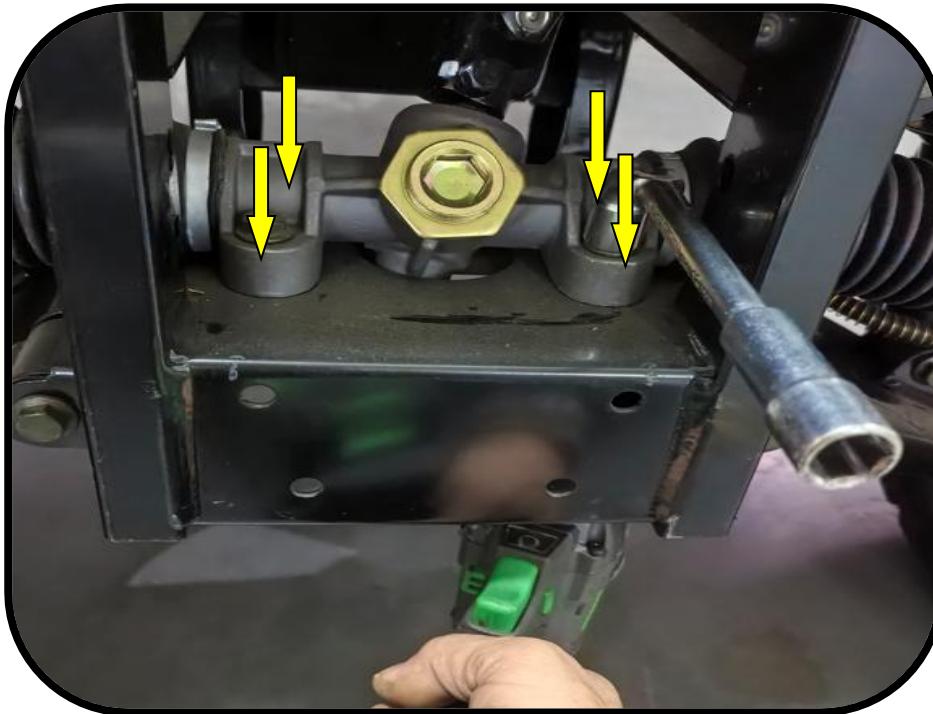

TOOL NEEDED

13mm sockets
13mm Elbow Wrench
17 mm Open-End Wrench
Needle-Nose Pliers
Rubber Mallet

Read carefully all the safety statements before attempting any procedure.

Front Bumper Replacement


⚠ CAUTION:

Use the correct tools when handling body components to avoid damage. Ensure all electrical connections are secure when installing accessories to prevent malfunctions.


TOOL NEEDED

10mm socket wrench

- As shown by the arrows in the image, there are four screw fastening points.

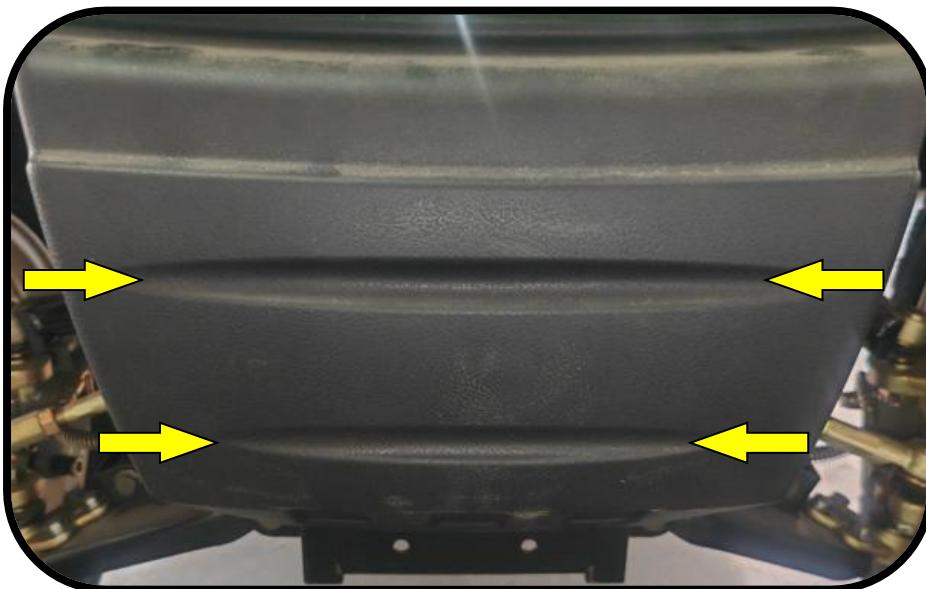

- Use a 10mm socket wrench to loosen and remove the fastening bolts securing the front bumper to the frame.

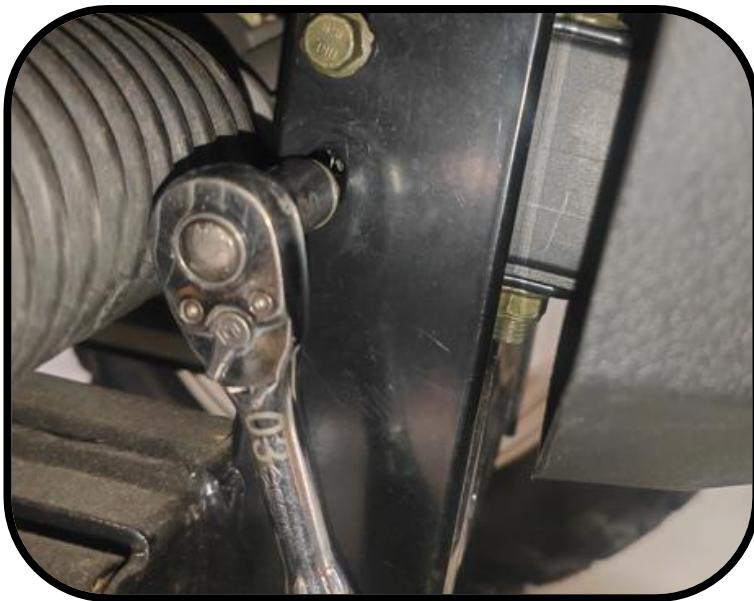

- Reverse these steps to install the replacement.

BODY & ACCESSORIES

Read carefully all the safety statements before attempting any procedure.

Rear Bumper Replacement

⚠ CAUTION:

Use the correct tools when handling body components to avoid damage. Ensure all electrical connections are secure when installing accessories to prevent malfunctions.

TOOL NEEDED

4mm hex wrench
13mm socket wrench

- Disconnect the camera communication cable at the location shown in the image.




Read carefully all the safety statements before attempting any procedure.

Rear Bumper Replacement

- Use a 13mm impact wrench to loosen and remove the fastening bolts securing the rear bumper to the frame at the locations shown in the image.

TOOL NEEDED

4mm hex wrench
13mm socket wrench

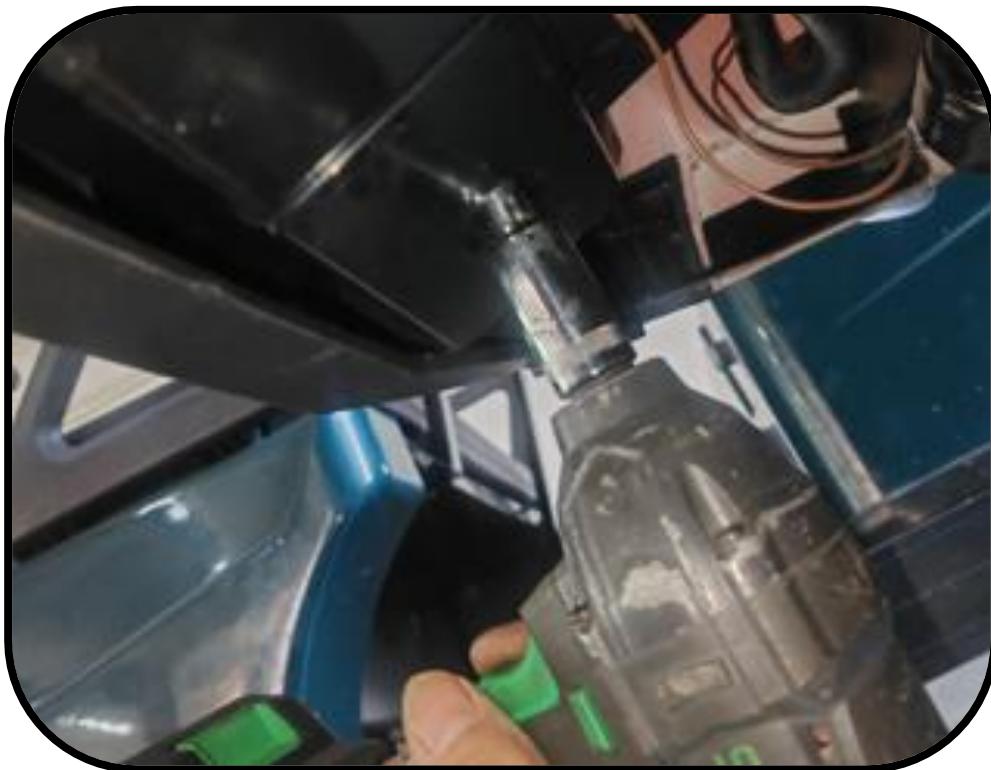


Rear Bumper Replacement

- Use a 4mm hex wrench to loosen and remove the fastening screws securing the rear bumper to the rear cover at the locations shown in the image.

TOOL NEEDED

4mm hex wrench
13mm socket wrench

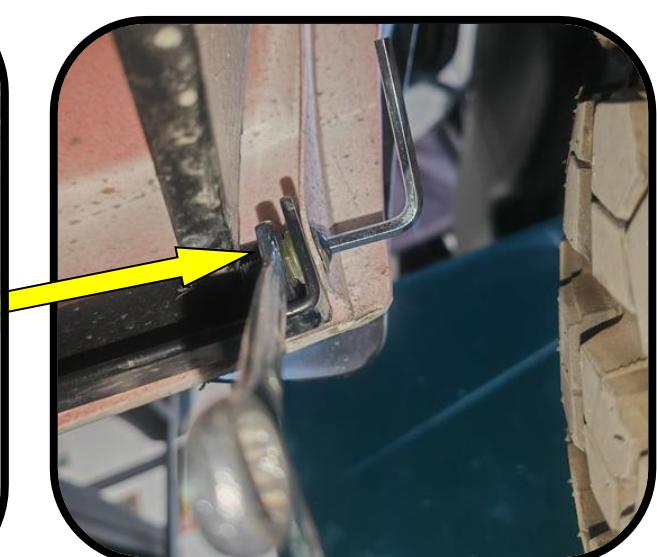

- Once removed, the bumper can be taken off.
- Reverse these steps to install the replacement.

Read carefully all the safety statements before attempting any procedure.

Headlight Replacement


⚠ CAUTION:

Use the correct tools when handling body components to avoid damage. Ensure all electrical connections are secure when installing accessories to prevent malfunctions.


TOOL NEEDED

8mm open-end wrench

- Remove the cup holder.

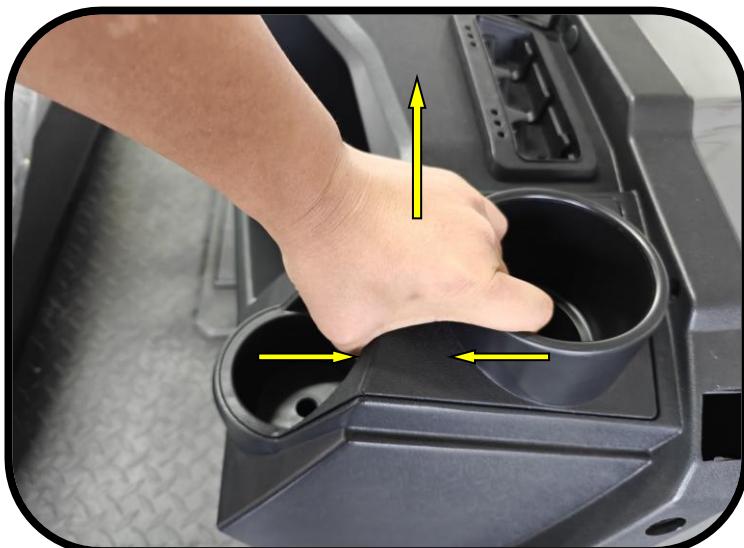

- Use an 8mm wrench to loosen and remove the screws connecting the headlight to the front cover. Then unplug the headlight connector to take the light out.

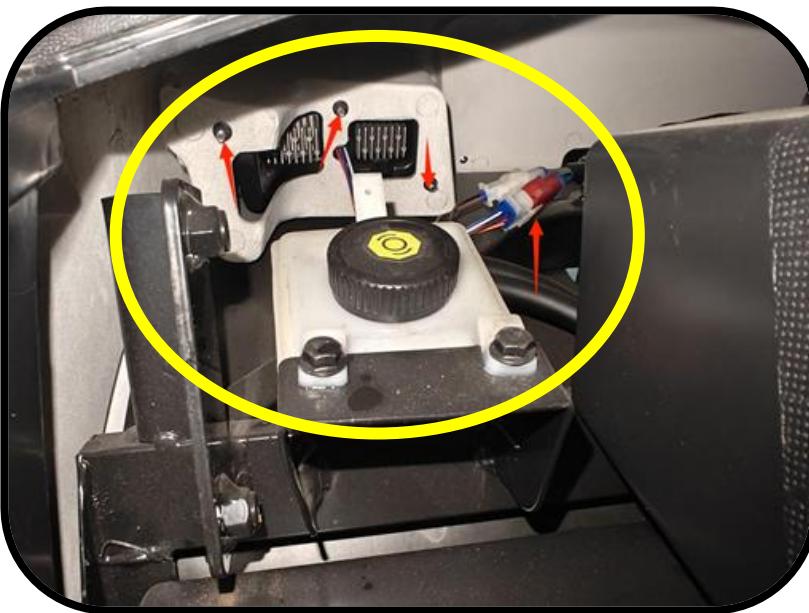

- Reverse these steps to install the replacement.

BODY & ACCESSORIES

Read carefully all the safety statements before attempting any procedure.

Taillight Replacement

⚠ CAUTION:

Use the correct tools when handling body components to avoid damage. Ensure all electrical connections are secure when installing accessories to prevent malfunctions.


TOOL NEEDED

8mm open-end wrench

- As shown in the picture, at the spot pointed by the arrow.



- Use an 8mm open-end wrench to loosen and remove the screws connecting the taillight to the rear cover. Then unplug the taillight connector to remove the light.

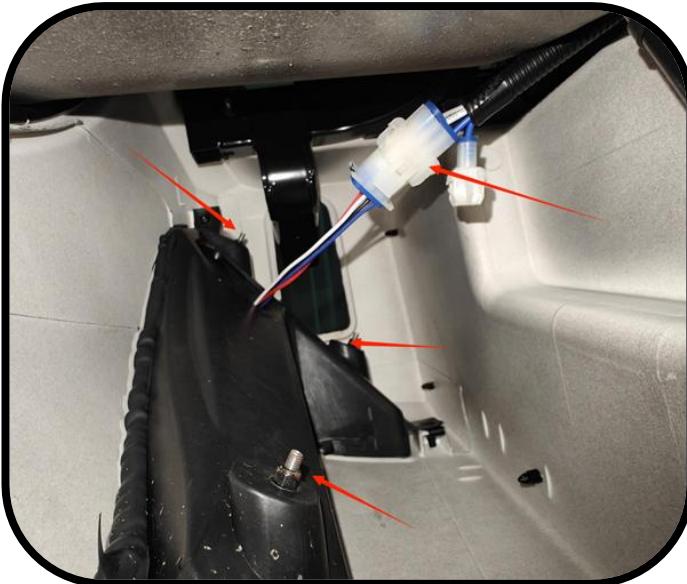

- Reverse these steps to install the replacement.

Read carefully all the safety statements before attempting any procedure.

Roof Replacement

⚠ CAUTION:

Use the correct tools when handling body components to avoid damage. Ensure all electrical connections are secure when installing accessories to prevent malfunctions.

TOOL NEEDED

13mm Open-End Wrench
13mm Electric Wrench

- Loosen and remove the 8 sets of screws securing the roof to the roof brackets as indicated by the arrows. And remove it.



- Reverse these steps to install the replacement.

Windshield Replacement


⚠ CAUTION:

Use the correct tools when handling body components to avoid damage. Ensure all electrical connections are secure when installing accessories to prevent malfunctions.

TOOL NEEDED

15mm Hexagon socket
19mm Hexagon socket

- Use a 4mm hex impact wrench to loosen and remove the screws at the locations shown in the image.
- Push forward on the vehicle to disengage the glass clips from the front roof support bar.

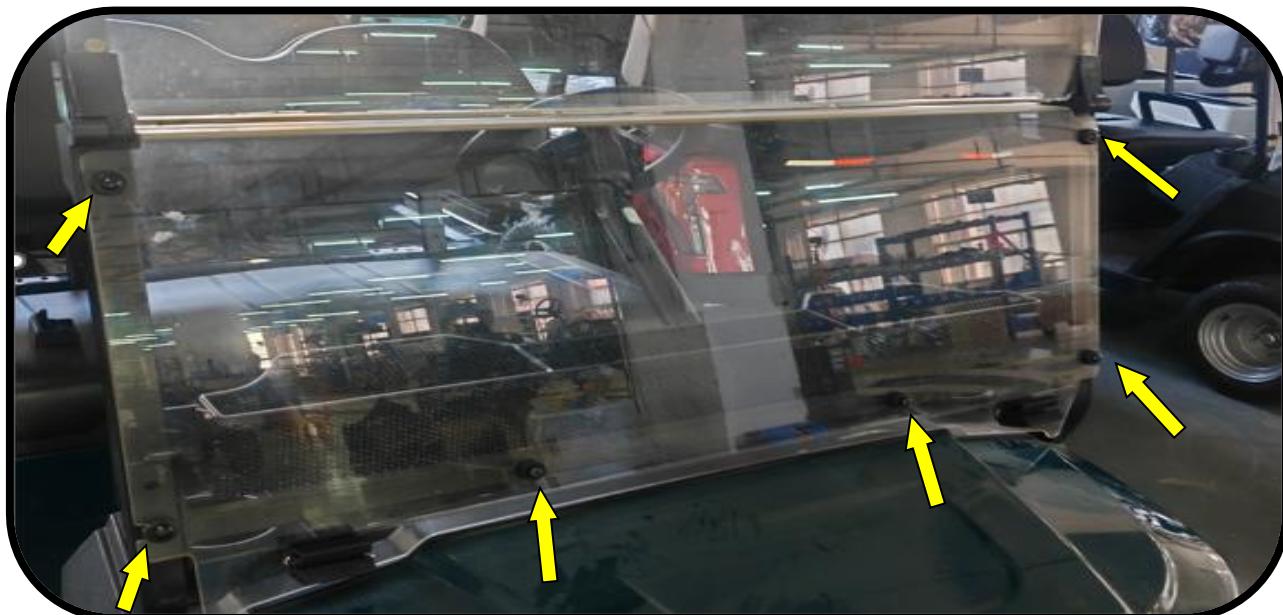

- Reverse these steps to install the replacement.

Read carefully all the safety statements before attempting any procedure.

Soundbar Replacement

⚠ CAUTION:

Use the correct tools when handling body components to avoid damage. Ensure all electrical connections are secure when installing accessories to prevent malfunctions.

TOOL NEEDED

4mm Hex Key

- Use a 4mm Hex Key to loosen and remove the four screws as shown in the image.



BODY & ACCESSORIES


Read carefully all the safety statements before attempting any procedure.

Soundbar Replacement


- Unplug the 5-pin lighting control connector.

TOOL NEEDED


4mm Hex Key

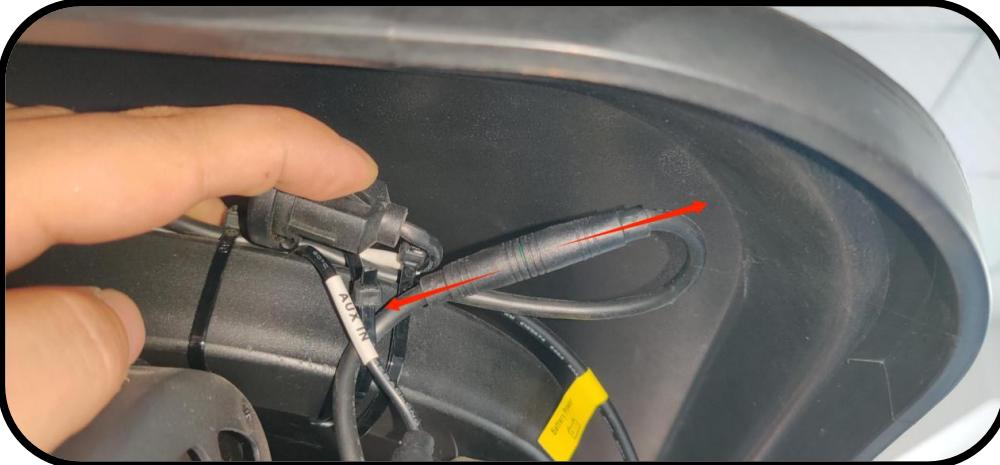

- Disconnect the power cable.

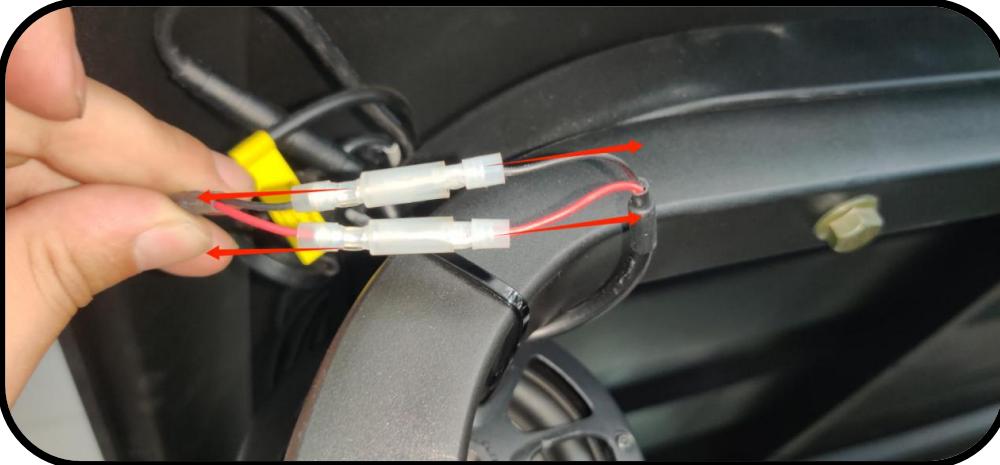

- Unplug the audio cable. Once disconnected, the speaker can be removed.

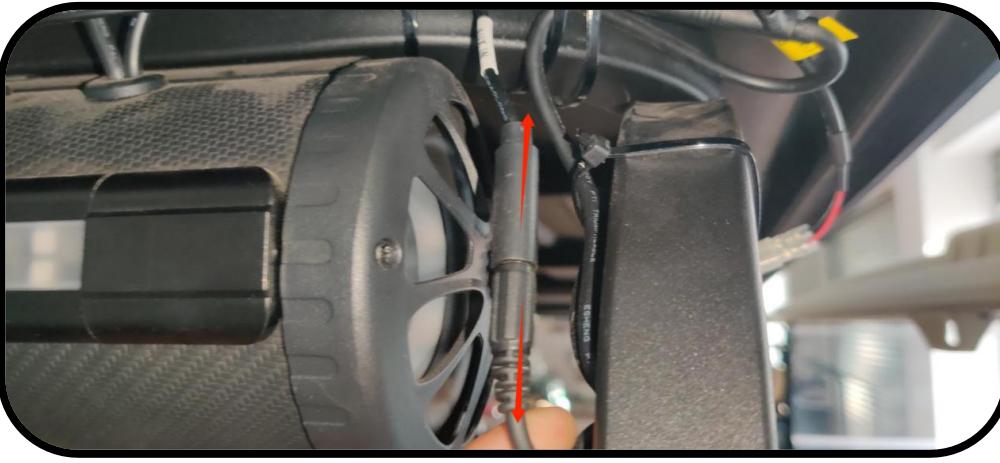

- Reverse these steps to install the replacement.

Read carefully all the safety statements before attempting any procedure.

Display Screen Replacement


⚠ CAUTION:

Use the correct tools when handling body components to avoid damage. Ensure all electrical connections are secure when installing accessories to prevent malfunctions.

TOOL NEEDED

Phillips screwdriver

- Loosen and remove the 4 screws on the center control panel and remove it.

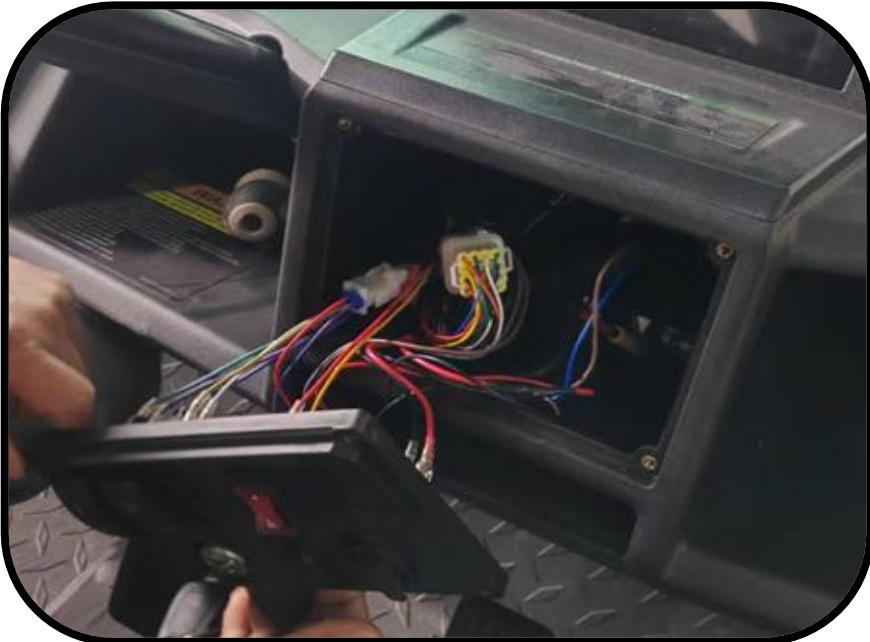

Display Screen Replacement

- Use a Phillips screwdriver to loosen and remove the 4 screws connecting the dashboard and the screen.
Unplug the screen connector to remove the screen.

TOOL NEEDED

Phillips screwdriver



- Reverse these steps to install the replacement.

Read carefully all the safety statements before attempting any procedure.

Light/Brake Handle Switch Replacement

⚠ CAUTION:

Use the correct tools when handling body components to avoid damage. Ensure all electrical connections are secure when installing accessories to prevent malfunctions.

TOOL NEEDED

Phillips screwdriver

- Push in the direction of the arrow to open the switch mount cover.



BODY & ACCESSORIES


Read carefully all the safety statements before attempting any procedure.

Light/Brake Handle Switch Replacement

- Use a Phillips screwdriver to loosen and remove the screw connecting the switch mount to the handlebar.

TOOL NEEDED

Phillips screwdriver

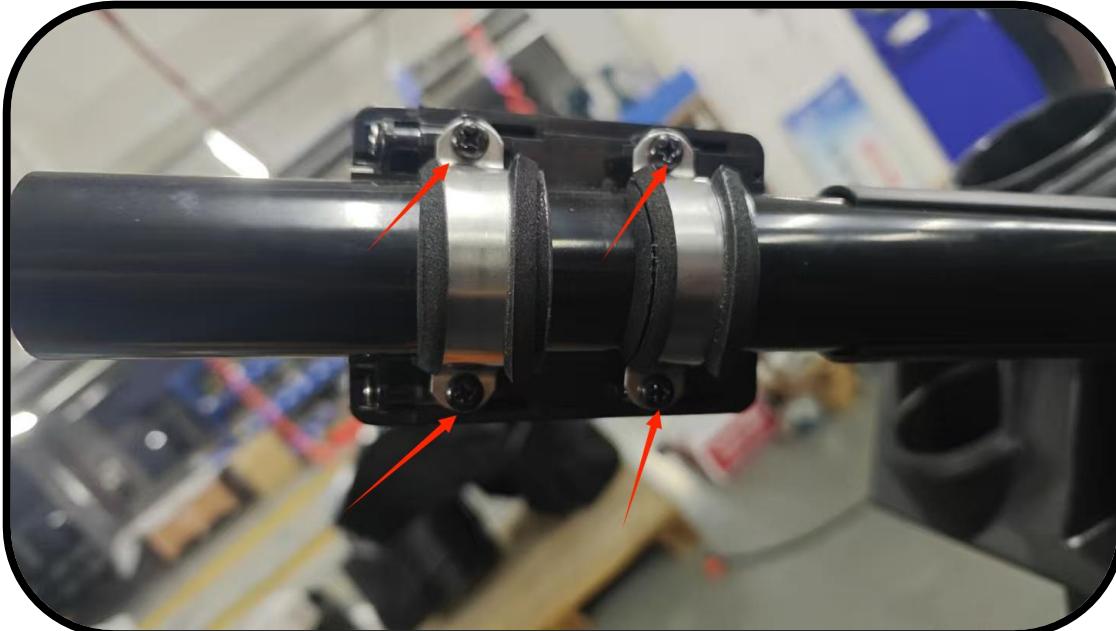

- Use a Phillips screwdriver to loosen and remove the top cover screw of the brake switch.



Read carefully all the safety statements before attempting any procedure.


Light/Brake Handle Switch Replacement

TOOL NEEDED

Phillips screwdriver



- Pull the wire cover along the handlebar in the direction of the arrow and push the switch mount in the arrow direction to separate the switch from the mount.

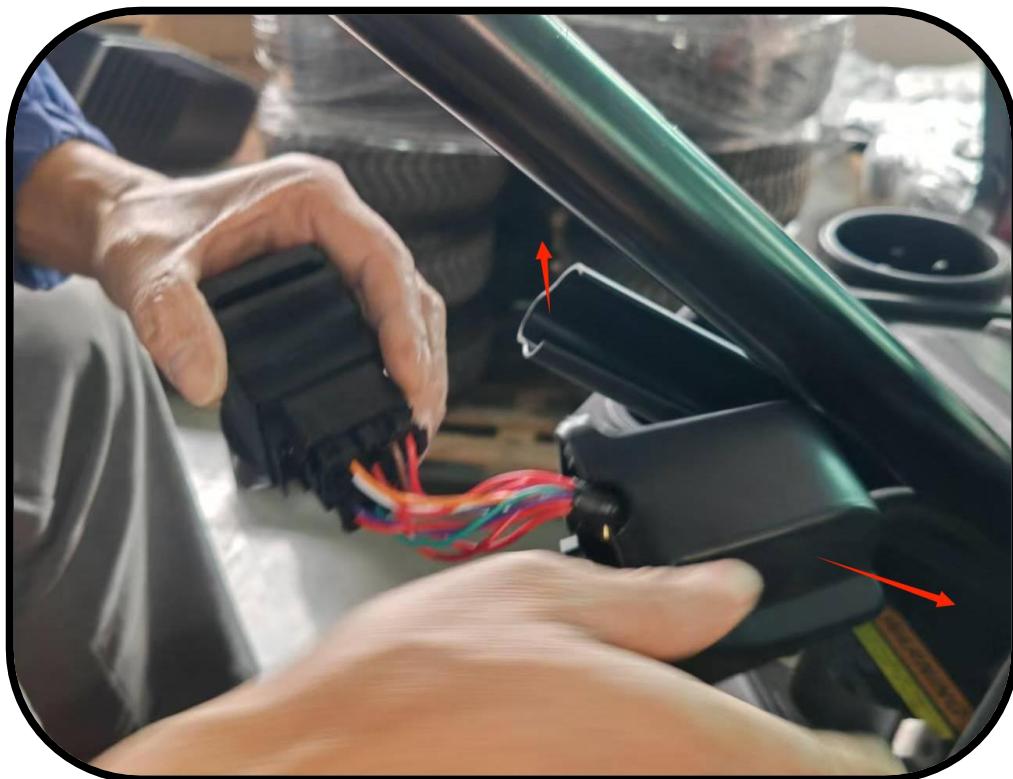

Read carefully all the safety statements before attempting any procedure.

Light/Brake Handle Switch Replacement

- Unplug the brake handle connector to replace the switch.



- Reverse these steps to install the replacement.

TOOL NEEDED

Phillips screwdriver

Read carefully all the safety statements before attempting any procedure.

Headlight Controller Replacement

⚠ CAUTION:

Use the correct tools when handling body components to avoid damage. Ensure all electrical connections are secure when installing accessories to prevent malfunctions.


TOOL NEEDED

Phillips screwdriver
Diagonal cutters

- Use a Phillips screwdriver to open the central control panel.



- The headlight controller is located at the position indicated by the arrow.

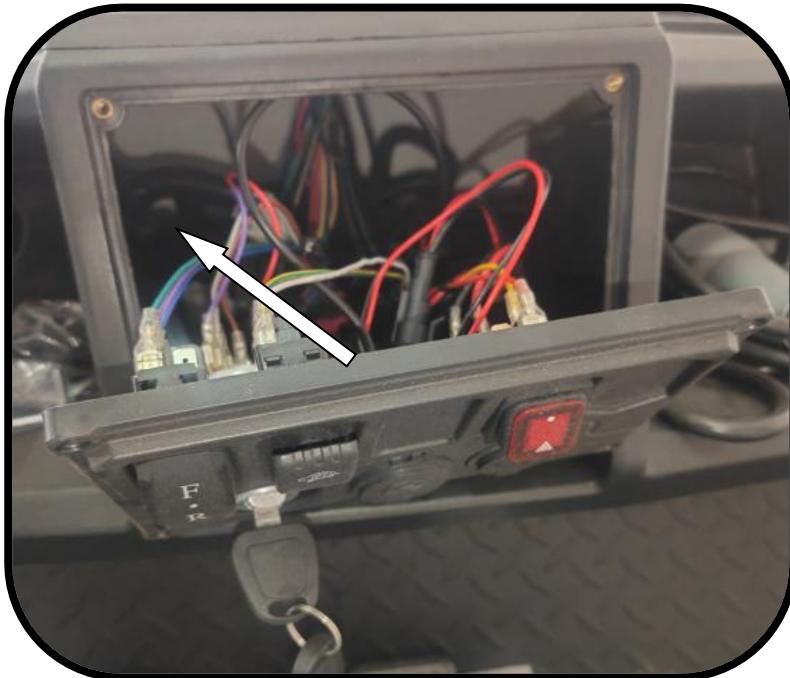

Headlight Controller Replacement

- Disconnect the plug from the headlight controller



TOOL NEEDED

Phillips screwdriver
Diagonal cutters



- Use diagonal cutters to cut off the zip ties securing the headlight controller wiring.



- Reverse these steps to install the replacement.

NOTE

NOTE



CARTS



BATTERY PARTS



www.breezyev.com