





:: Catalog No.	LFLV-7W-30K LFLV-7W-50K	LFLV-12W-30K LFLV-12W-50K	
:: Wattage	7W	12W	
:: Lumens	500 (30K), 550 (50K)	800 (30K), 900 (50K)	
:: Voltage	12V AC/DC (Tolerance: 8-1	14V AC/DC 7W, 11-14V AC/DC 12W)	
:: Color Temp	3000K Warm White (	(30K), 5000K Cool White (50K)	
:: Beam Angle	40°	60°	
:: Light Source	Nichia 757 UL-Recognized LED Cor	ntroller and SMD LED Array (Non-Dimmable)	
:: Housing / Finish	ADC 12 Cast Aluminum	with Powder Coat (Bronze Finish)	
:: Lens	Optical Polycarbonate Lens	Prismatic Reflector + Optic LED Lens and Glass Front Lens	
:: Dimensions	4.30" 2.36"	3.94"	

:: Accessories included



Silicon-filled WireNuts



8-1/2" Non-metallic Spike



2ft. SPT-2 18AWG Lead Wire



Integrated SMD board and Optical Lens















**E2** 

12V LED LANDSCAPE LIGHTS



#### 12V INTEGRATED LED LANDSCAPE FLOOD LIGHTS

:: Catalog No.	FLV12-6W-30K FLV12-6W-50K	FLV12-12W-30K FLV12-12W-50K	FLV12-24W-30K FLV12-24W-50K	FLV12-32W-30K FLV12-32W-50K
:: Wattage	6W	12W	24W	32W
:: Lumens	500 (30K), 550 (50K)	1200 (30K), 1300 (50K)	2200 (30K), 2500 (50K)	3200 (30K), 3500 (50K)

12V AC/DC (Tolerance: 12-18V AC, 10-26V DC)

3000K Warm White (30K), 5000K Cool White (50K)

:: Beam Angle 60°

:: Light Source Philips Lumileds (Non-dimmable)

:: Housing / Finish ADC 12 Cast Aluminum with Powder Coat (Bronze Finish)

:: Lens Optical Polycarbonate Lens


:: Dimensions

:: Voltage


:: Color Temp













:: Accessories included



Silicon-filled WireNuts



Non-metallic Spike

3ft. SPT-2 18AWG Lead Wire (6W 22AWG)











#### 12V INTEGRATED LED WALL WASH LIGHTS

:: Catalog No.	LF4-12V-6W-30K LF4-12V-6W-50K	LF4-12V-12W-30K LF4-12V-12W-50K	LF4-12V-24W-30K LF4-12V-24W-50K	LF4-12V-30W-30K LF4-12V-30W-50K	LF4-12V-50W-30K LF4-12V-50W-50K	
:: Wattage	6W	12W	24W	30W	50W	
:: Lumens	440 (30K), 500 (50K)	1080 (30K), 1260 (50K)	2155 (30K), 2500 (50K)	2700 (30K), 3150 (50K)	4500 (30K), 5250 (50K)	
:: Voltage		1	2V AC/DC (Tolerance	: 12-18V AC, 10-26V I	DC)	
:: Color Temp		300	OK Warm White (30k	(), 5000K Cool White	(50K)	
:: Beam Angle		120° X 90°				
:: Light Source			Philips Lumileds	s (Non-dimmable)		
:: Housing / Finish		ADC 12 Cast Aluminum with Powder Coat (Bronze Finish)				
:: Lens			Optical Poly	carbonate Lens		
:: Dimensions	4.7" 2.6" 3.5"					
Accessories	For surface mounting use A-41-BR base see accessories page					

:: Accessories included



Silicon-filled WireNuts



3ft. SPT-2 18AWG Non-metallic Spike Lead Wire (6W 22AWG)















#### 12V LED GARDEN LIGHTS

	LF12-6WW
:: Catalog No.	LF12-6NW
	LF12-6CW

5W (New Higher Efficency, Same Lumens as Previous 6W) :: Wattage

400LM (3200K) / 450LM (4000K) / 450LM (5000K) :: Lumens

12V AC/DC (Toleranc: ±3V AC/DC) :: Voltage

3200K Warm White (WW), 4000K Natural White (NW), 5000K Cool White (CW) :: Color Temp

45° :: Beam Angle

COB Technology with Smooth Aluminum Reflector (Non-dimmable)


ADC 12 Cast Aluminum with Powder Coat (Bronze Finish) :: Housing / Finish

Glass Lens

:: Dimensions

:: Lens

:: Light Source



:: Accessories included













**E4** 




**Green** Zone





#### 12V LED DIRECTIONAL LIGHT - SOLID BRASS

:: Catalog No.	LFLD-5W-30K-BZ
:: Wattage	5W
:: Lumens	400LM
:: Voltage	12V AC/DC
:: Color Temp	3000K Warm White
:: Beam Angle	90° to 10° Adjustable with Telescopic Hood
:: Light Source	CREE COB Technology (Non-Dimmable)
:: Housing / Finish	Solid Brass Antique Bronze Finish
:: Lens	Magnifying Glass Lens Adjusts Beam Angle from 90° to 10°
:: Dimensions	4.5 to 6 "Adjustable for Beam Angle



:: Accessories included



Silicon-filled WireNuts



















#### 12VLED DIRECTIONAL LIGHTS - SOLID COPPER & SOLID BRASS

		ILV LLD DII	LOTIONAL LIGHTO	OOLID OOI I LIK &	JOEID DITHOG		
<b>E6</b>	:: Catalog No.	LD-098-CR	LD-176-CR	LD-176-BZ	LD-009-BZ		
LU	:: Housing / Finish	Cast Solid Cop	per, Natural Finish	Cast Solid Brass, Ar	ntique Bronze Finish		
	:: Wattage		5W (Included)	), 7W LED Max.			
12	:: Lumens		400	DLM			
V LEI	:: Voltage		12V /	AC/DC			
12V LED LANDSCAPE LIGHTS	:: Color Temp	3000K Warm White					
IDSC,	:: Beam Angle	36°					
APEL	:: Light Source	5W LED Glass MR16 Lamp Included (WESTGATE Part Number: MR16-400L-30K-D)					
.IGHT	:: Lens		Convex (	Glass Lens			
S	:: Dimensions	e v v	2-3/8" 2-5/8"	2-5/8" 2-5/8"	25.5 True 25.5 T		
	:: Accessories included						

Silicon-filled

WireNuts

8-1/2"

Non-metallic Spike

3ft.

SPT-2 18AWG

Lead Wire

LED MR16 Lamp





#### 12VLED DIRECTIONAL LIGHTS - SOLID BRASS

:: Catalog No.	LD-006-BZ	LD-103-BZ	LD-099-BZ	LD-174-BZ
:: Housing / Finish	(	ast Solid Brass, Antique Bronze F	inish	Spun Solid Brass
:: Wattage		5W (Included	), 7W LED Max.	
:: Lumens		40	OLM	
:: Voltage		12V	AC/DC	
:: Color Temp		3000K W	arm White	
:: Beam Angle		3	36°	
:: Light Source	5W LEI	O Glass MR16 Lamp Included (WE	STGATE Part Number: MR16-400	DL-30K-D)
:: Lens		Convex	Glass Lens	
:: Dimensions		e,sin 2-lar		
:: Accessories included		3ft.		



LED MR16 Lamp

SPT-2 18AWG

Lead Wire

8-1/2"

Non-metallic Spike

Silicon-filled

WireNuts











#### 12V LED DIRECTIONAL LIGHTS-SOLIDBRASS, CAST ALUMINUM, FIBER GLASS

		121 225 SINCE FIGHTIE EIGHT GELISSING GOOD NEGHTIGHT, 1152N GEL					
<b>E8</b>	:: Catalog No.	LD-192-BZ	AD-192-BK AD-192-BR	AD-192-FBK			
LU	:: Housing / Finish	Cast Brass Antique Bronze (BZ)	Die-cast Aluminum Black (BK), Bronze (BR)	Fiberglass (Black)			
	:: Wattage		5W (Inluded), 7W LED Max.				
12	:: Lumens		400LM				
V LEI	:: Voltage		12V AC/DC				
12V LED LANDSCAPE LIGHTS	:: Color Temp	3000K Warm White					
DSC	:: Beam Angle	36°					
APE L	:: Light Source	5W LED glass MR	5W LED glass MR16 Lamp Included (WESTGATE Part Number: MR16-400L-30K-D)				
IGHT	:: Lens		Convex Glass Lens				
S	:: Dimensions	4-1/2"	2-1/2"	4.112"			

:: Accessories included



WireNuts

8-1/2" Non-metallic Spike





LED MR16 Lamp













#### 12V LED DIRECTIONAL LIGHTS - ALUMINUM

:: Catalog No.	AD-102-BK AD-102-BR	AD-003-BK AD-003-BR	AD-130-BK AD-130-BR	AD-131-BK AD-131-BR		
:: Housing / Finish			uminum (), Bronze (BR)			
:: Wattage		5W (Include	ed), 7W LED Max.			
:: Lumens		4	400LM			
:: Voltage		12'	V AC/DC			
:: Color Temp		3000K Warm White				
:: Beam Angle			36°			
:: Light Source	5W LEC	O Glass MR16 Lamp Included (W	/ESTGATE Part Number: MR16-40	oL-30K-D)		
:: Lens		Flat Glass Lens (E	xcept AD-102 Convex)			
:: Dimensions	4-31A" - 2-12		5566	5,518		
·· Accessories						

:: Accessories included



Silicon-filled WireNuts



8-1/2" Non-metallic Spike





LED MR16 Lamp















#### **AGED NICKEL COLLECTION**

:: Catalog No.	LD-103-AN	LA-112-AN	LA-117-AN	LA-116-AN	LA-111-AN	
:: Housing / Finish	Cast Brass, Aged Nickel Finish	Cast Brass, Aged Nickel Finish				
:: Wattage	5W (Included), 7W LED Max.	3W				
:: Lumens	400LM	200LM				
:: Voltage	12V AC/DC	12V AC/DC				
:: Color Temp	3000K Warm White	3000K Warm White				
:: Beam Angle	36°			360°		
:: Light Source	5W LED Glass MR16 Lamp Included	Int	egrated SMD LED Towe	rHeavy-Duty Clear Gl	ass Lens	
:: Lens	Flat Glass Lens	-				
:: Diameter of Shade	For dimensional drawing	5-1/2"	7-7/8"	6-3/4"	8"	
:: Total Height	see page E7	23"	23"	23"	23"	
:: Accessories						



Silicon-filled WireNuts



8-1/2" Non-metallic Spike



Lead Wire



LED MR16 Lamp (LD-103-AN)



**LED Tower** (Path lights)









**E10** 







# **E12**

#### 12V LED AREA LIGHTS-SOLID BRASS

:: Catalog No.	LA-STEM-BZ	LA-112-BZ	LA-115-BZ	LA-117-BZ			
:: Housing / Finish		Solid Brass - Antique Bronze Finish					
:: Wattage		3	W				
:: Lumens		200	DLM				
:: Voltage	12V AC/DC						
:: Color Temp		3000K Wa	arm White				
:: Beam Angle		36	60°				
:: Light Source		Integrated SMD LED Tower	Heavy-Duty Clear Glass Lens				
:: Lens	-						
:: Diameter of Shade	_	5-1/2"	5-3/8"	7-7/8"			
:: Total Height	23"	23"	23"	23"			
:: Accessories included	* If ordering stem and shade separately, add "-C" to fixture model for shade Example: LA-112-BZ-C (Shade only) + LA-STEM-BZ						

Silicon-filled

WireNuts

8-1/2"

Non-metallic Spike

3ft.

SPT-2 18AWG


Lead Wire

**LED Tower** 







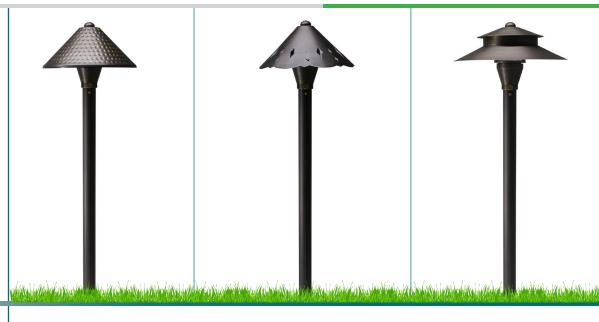

#### 12V LED AREA LIGHTS-SOLID BRASS

:: Catalog No.	LA-116-BZ	LA-118-BZ	LA-111-BZ			
:: Housing / Finish	Solid Brass - Antique Bronze Finish					
:: Wattage		3W				
:: Lumens		200LM				
:: Voltage	12V AC/DC					
:: Color Temp	3000K Warm White					
:: Beam Angle	360°					
:: Light Source	Integ	rated SMD LED Tower Heavy-Duty Clear Glas	s Lens			
:: Lens	-					
:: Diameter of Shade	6-3/4" 6-7/8" 8"					
:: Total Height	23" 23" 23"					
:: Accessories	* If ordering stem and shade separately, add "-C" to fixture model for shade					

included

Silicon-filled WireNuts



8-1/2" Non-metallic Spike



Example: LA-112-BZ-C (Shade only) + LA-STEM-BZ

3ft. SPT-2 18 AWG Lead Wire



**LED Tower** 







**E14** 



#### 12V LED AREA LIGHTS SOLID BRASS

:: Catalog No.	LA-008-BZ	LA-010-BZ	LA-002-BZ	
:: Housing / Finish		Solid Brass - Antique Bronze Finish		
:: Wattage		3W		
:: Lumens		200LM		
:: Voltage	12V AC/DC			
:: Color Temp	3000K Warm White			
:: Beam Angle	360°			
:: Light Source	Integrated SMD LED Tower			
:: Lens	Heavy-Duty Clear Glass Lens			
:: Diameter of Shade	5-1/2"	8-1/2"	5-1/2"	
:: Total Height	20"	23"	23-1/2"	
:: Accessories	* If ordering stem and shade separately, add "-C" to fixture model for shade			

included

3ft.

SPT-2 18AWG

Lead Wire

**LED Tower** 

8-1/2"

Non-metallic Spike

Silicon-filled

WireNuts

Example: LA-112-BZ-C (Shade only) + LA-STEM-BZ





#### 12V LED PAGODA LIGHTS

:: Catalog No.	AA-145-BZ AA-145-BK	AA-146-BZ AA-145-BK	AA-148-BK	
:: Housing / Finish	Sol	id Brass - Antique Bronze Finish (BZ), Black	(BK)	
:: Wattage		3W		
:: Lumens		200LM		
:: Voltage	12V AC/DC			
:: Color Temp	3000K Warm White			
:: Beam Angle	360°			
:: Light Source	Integrated SMD LED Tower			
:: Lens		Heavy-Duty Clear Glass Lens		
:: Diameter of Shade	6"	6"	8-3/4"	
:: Height of Stem	4"	13"	11"	
:: Total Height	9-1/2"	13"	14-3/4"	
:: Accessories included				

**LED Tower** 

8-1/2"

Non-metallic Spike

Silicon-filled

WireNuts

3ft.

SPT-2 18AWG

Lead Wire







**E16** 

#### 12V LED AREA LIGHTS-SOLID COPPER

:: Catalog No.	LA-STEM-CR	LA-111-CR	LA-117-CR	LA-116-CR		
:: Housing / Finish		Solid Copper,	Natural Finish			
:: Wattage		3	W			
:: Lumens		200	DLM			
:: Voltage	12V AC/DC					
:: Color Temp		3000K Wa	arm White			
:: Beam Angle		360°				
:: Light Source		Integrated SI	MD LED Tower			
:: Lens	Heavy-Duty Clear Glass Lens					
:: Diameter of Shade	_	8"	7-3/4"	6-3/4"		
:: Height of Stem	23"	23"	23"	23"		
:: Total Height	* If orc	* If ordering stem and shade separately, add "-C" to fixture model for shade Example: LA-111-CR-C (Shade only) + LA-STEM-CR				
:: Accessories						

included



WireNuts





8-1/2" Non-metallic Spike





**LED Tower** 













#### 12V LED AREA LIGHTS-SOLID COPPER

:: Catalog No.	LA-010-CR	LA-118-CR	LA-112-CR
:: Housing / Finish		Solid Copper, Natural Finish	
:: Wattage		3W	
:: Lumens		200LM	
:: Voltage	12V AC/DC		
:: Color Temp	3000K Warm White		
:: Beam Angle	360°		
:: Light Source	Integrated SMD LED Tower		
:: Lens	Heavy-Duty Clear PC Lens		
:: Diameter of Shade	5-3/4"	6-1/4"	6-1/4"
:: Height of Stem	20"	18"	12"
I.i I.i			

:: Total Height

:: Accessories included



Silicon-filled WireNuts



8-1/2" Non-metallic Spike



Lead Wire



**LED Tower** 





















E18

### LED STEP LIGHTS

:: Catalog No.	LS-124-BZ	LS-155-BZ	LS-160-BZ	LS-161-BZ
:: Material / Finish	Solid Bras	s Faceplate, Antique Bronze Fini	sh, Powder Coated Galvanized St	reel Housing
:: Wattage		;	3W	
:: Lumens		20	DOLM	
:: Voltage		12V	AC/DC	
:: Color Temp	3000K Warm White			
:: Beam Angle		!	90°	
:: Light Source		Integrated S	MD LED Module	
:: Lens		Glass, Inside Fros	st with Foam Gasket	
:: Dimensions	2 5/16 9 3/8"  Housing Depth: 3 1/2"	4 1/2"  2 5/16"  5 5/8"  Housing Depth: 2 1/4"	8" 5 3 3" 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	4 1/2" 3 1/8" 5 5/8"  Housing Depth: 2 1/4"

:: Accessories included



Silicon-filled WireNuts



3ft. SPT-2 18AWG Lead Wire



Integrated SMD LED Module



















STEP LIGHTS WITH LED LAMPS

5 (WITNESS COMPANY COM

:: Catalog No.	LS-180-BZ 3" ARCHITECTURAL	LS-158-BZ	LS-158-SS	LS-159-BZ	
:: Housing / Finish	Solid Brass, Antique Bronze Finish	Solid Brass, Antique Bronze Finish	Cast Solid Brass, Stainless Steel Finish	Solid Brass, Black Finish	
:: Wattage		3	W		
:: Lumens		300	oLM		
:: Voltage		12V /	AC/DC		
:: Color Temp	3000K Warm White				
:: Beam Angle	80°				
:: Light Source	LED JC G4 Corn Lamp Bipin				
:: Lens		Glass	s Lens		
:: Dimensions	3.126°				
:: Accessories					





ilicon-filled SPT-2 18AWG
WireNuts Lead Wire



LED JC G4 Corn Lamp Bipin













#### STEP LIGHTS WITH LED LAMPS

	AS-158-BR	AS-159-BR
:: Catalog No.	AS-158-BK	AS-159-BK

:: Housing / Finish
:: Wattage

Cast Aluminum,
Bronze / Black Finish
:: Wattage

:: Lumens 300LM

:: Voltage 12V AC/DC

:: Color Temp 3000K Warm White

:: Beam Angle 80°


:: Light Source LED JC G4 Corn Lamp Bipin


:: Lens Glass Lens

:: Dimensions

**E20** 

**LED STEP LIGHTS** 





:: Accessories included



3ft. SPT-2 18AWG Lead Wire



LED JC G4 Corn Lamp Bipin















## 12V INTEGRATED LED (IN GROUND) LIGHTS

:: Catalog No.	IGL-7W-30K	IGL-3W-30K	IGL-1W-30K	F21
:: Housing / Finish	Stain	less Steel Cover, Aluminum Housing, PVC S	Sleeve	
:: Wattage	7W	3W	1W	
:: Lumens	620LM	290LM	100LM	_
:: Voltage		12V AC/DC		
:: Color Temp		3000K Warm White		WELL LIGHTS
:: Beam Angle	36°			- 0,
:: Light Source	COB Technology (Dimmable)			_
:: Lens		Glass lens		_
:: Dimensions	3.74" (95mm) 3.94" (100mm) 5.50" (140mm) 7W LED Light Engine Recessed Housing	3.54" (90mm) 3.39" (86mm) Recessed Housing	1.65° (42mm)  2.87° (73mm)  1.50° (38mm)  2.76° (70mm)  1W LED Light Engine  Recessed Housing	
:: Accessories included	Silicon-filled WireNuts	5" SJTW 20AWG Lead Wire TECHN	DB ology	

LED



#### **WELL LIGHTS WITH SLEEVE WITH LED LAMPS**

<b>E22</b>	:: Catalog No.	WL-137-BK	WL-137-BZ	WL-138-BK	WL-138-BZ	WL-138-SS
LZZ	:: Housing / Finish	Cast Aluminum (Black Finish with PVC Sleeve)	Cast Brass (Antique Bronze Finish with PVC Sleeve)	Cast Aluminum (Black Finish with PVC Sleeve)	Cast Brass (Antique Bronze Finish with PVC Sleeve)	Solid Stainless Steel with PVC Sleeve
	:: Wattage			5W		
LED	:: Lumens			400LM		
D ST	:: Voltage			12V AC/DC		
STEP LIGHTS	:: Color Temp		3000K Warm White			
ЭНТЅ	:: Beam Angle			36°		
	:: Light Source		MR16 Lamp Included	I (WESTGATE Part Number	er: MR16-400L-30K-D)	
	:: Lens			Flat Temp. Glass		
	:: Dimensions	3-7/8*	3-7/8*	3-7/8"	3-7/8"	37/8"
	:: Accessories included	Silicon-filled WireNuts	d SPT-2	ft. 18AWG Wire		location IP67

LED MR16 Lamp

Lead Wire















a partition of the contract of

#### **WELL LIGHTS WITH LED LAMPS**

:: Catalog No.	WL-105-1-BK	WL-105-BK	WL-157-BK	WL-181-BK WL-181-BR	WL-181-BZ	<b>E23</b>
:: Housing / Finish		uminum, Finish	Diecast Aluminum, Black Finish	Diecast Aluminum, Black (BK) & Bronze (BR) Finish	Solid Brass Antique Bronze (BZ) Finish	
:: Wattage			5W			WEL
:: Lumens			400LM			WELL LIGHTS
:: Voltage			12V AC/DC			SIH
:: Color Temp		3000K Warm White				
:: Beam Angle	3	6°	60°	36°	36°	
:: Light Source		MR16 lamp included (WESTGATE Part Number: MR16-400L-30K-D)				
:: Lens			Glass lens			
:: Dimensions	3.7/8*	3-7/8*	3-7/8"	3-7/8"	3-7/8"	
:: Accessories included	Silicon-fille WireNuts	d SPT-2	ft. 18AWG Wire LED	MR16 Lamp	location IP67	

LED MR16 Lamp

Lead Wire



INTEGRATED









HSL-13-30K

3W

160LM

· O

**LED HARDSCAPE LIGHTS** 

HSL-3-30K HSL-7-30K :: Catalog No. Cast Aluminum Fixture, Stainless Steel Bracket, Aluminum Front Trim with Dark Gray Finish (Paintable) :: Housing / Finish 1W 2W :: Wattage :: Lumens 30LM 100LM :: Voltage 12V AC

:: Color Temp


:: Beam Angle

:: Light Source


:: Dimensions

:: Accessories included

:: Lens



3ft. SPT-2 18AWG Lead Wire




3000K Warm White

36°

**LED COB Technology** 

**Built-In Glass Magnifying Lens** 



Aluminum Dark Gray (Paintable) Trim & Bracket Included









**E24** 

**LED STEP LIGHTS** 







#### **PAR36 FIXTURES**

:: Catalog No.	WL-140-FBK	LD-001-BZ
:: Housing / Finish	Fiber Glass, Black	Die-cast Brass, Antique Bronze Finish
:: Wattage	-	
:: Lumens	Depends on lamp	Depends on lamp
:: Voltage	12V	12V
:: Color Temp	-	-
:: Beam Angle	Depends on lamp	Depends on lamp
:: Light Source	PAR36 (not included)	Shown With Westgate PAR36 Lamp (not included)
:: Dimensions		4-9/10"

:: Components



Silicon-filled WireNuts (Included)



SJTW 18AWG Lead Wire with fork ends for WL-140-FBK (Included)



SPT-2 18AWG Lead Wire with fork ends for LD-001-BZ (Included)



Westgate PAR36 Lamp (Not Included) See page E31


















**E26** 

#### SINGLE-GANG LED STEP LIGHT ENGINE FOR RECESSED TRIMS

:: Catalog No.	SLEA-12V-30K SLEA-12V-50K	SLEA-120V-30K SLEA-120V-50K		
:: Material / Finish	PVC Housing			
:: Wattage	2W			
:: Lumens	86LM	86LM		
:: Voltage	12V AC/DC	120V AC		
:: Color Temp	3000K Warm White, 5000K Cool White			
:: Beam Angle	-			
:: Light Source	Integrated COB LED Bar (Weatherproof) with built-in driver			
:: Lens	PC L	ens		

:: Dimensions





Fits in Single Gang Switch Boxes (not included)

:: Accessories included



Lead Wire




**PVC Gasket Set** for J-box or weatherproof box mounting







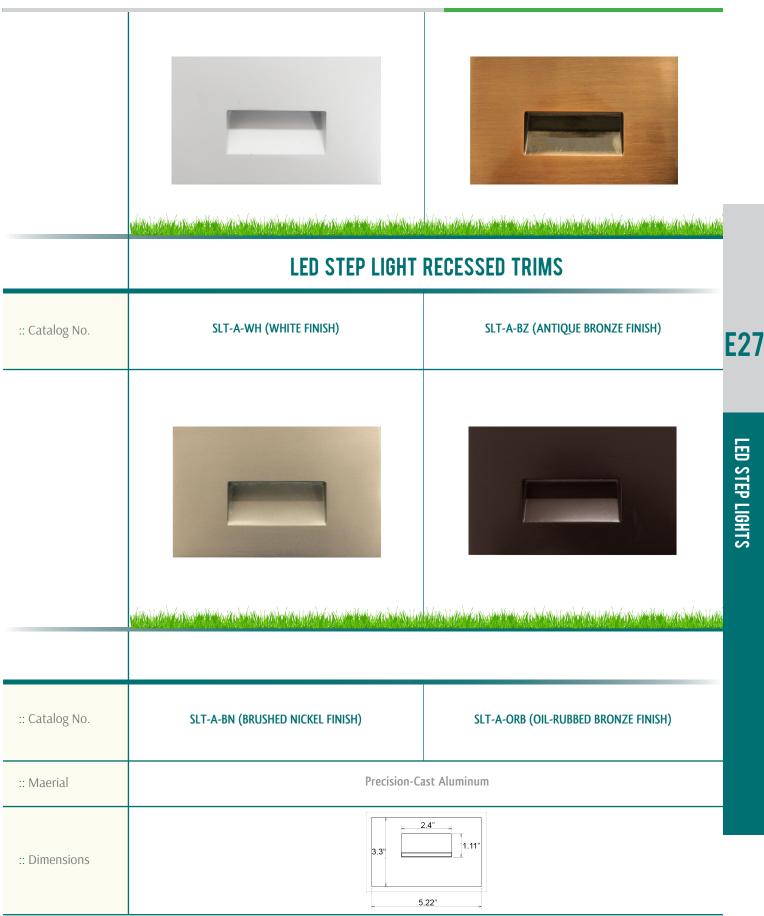









#### SINGLE-GANG LED STEP LIGHT ENGINE

:: Catalog No.	SLE-12V-30K SLE-12V-50K	SLE-120V-30K SLE-120V-50K	
:: Material / Finish	PVC Housing W/ inside frosted PC lens		
:: Wattage	3W		
:: Lumens	100LM (3000K) / 118LM (5000K)	90LM (3000K) / 104LM (5000K)	
:: Voltage	12V AC/DC 120V AC		
:: Color Temp	3000K Warm White, 5000K Cool White		
:: Beam Angle	-		


:: Light Source

**E28** 

Integrated SMD LED Module (Weatherproof) with built-in driver

Glass, Inside Frost with Foam Gasket :: Lens

:: Dimensions





Fits in Single Gang Switch Boxes (not included)

:: Accessories included





**PVC Gasket Set** for J-box or weatherproof box mounting







UW-125-SS

Stainless Steel



#### **LED UNDERWATER LIGHTS**

E30

:: Catalog No.

UW-125-BS

:: Housing / Finish

Brass

:: Wattage 5W

:: Lumens 400LM

:: Voltage 12V AC/DC


:: Color Temp 3000K Warm White

:: Beam Angle 36°

:: Light Source MR16 Lamp Included (WESTGATE Part Number: MR16-400L-30K-D)

:: Lens Glass Lens

:: Dimensions



:: Accessories included





30ft. SJO 18-2AWG Lead Wire



LED MR16 Lamp



















	MR16-400L	MR16-500L	MR16-RGB	PAR36 FOR ENCLOSED FIXTURES
:: Catalog No.	MR16-400L-27K-D MR16-400L-27K-D MR16-400L-27K-D MR16-400L-27K-D	MR16-500L-30K-D MR16-500L-50K-D	MR16-5W-RGB	PAR36-10W-30K PAR36-10W-30K PAR36-10W-30K
:: Wattage	5W	7W	5W	10W
:: Lumens	380LM, 380LM, 390LM, 400LM	500LM, 560LM	280LM	500LM, 800LM, 600LM
:: Voltage	12V AC/DC	12V AC/DC	12V AC/DC	12V AC/DC
:: Color Temp	2700K, 3000K, 4100K, 5000K	3000K, 5000K	RGB	3000K, 4000K, 5000K
:: Beam Angle	36°	36°	36°	50°











#### 12V AC/DC REPLACEMENT LAMPS

:: Catalog No.	GZ-JC-39L-27K GZ-JC-39L-30K	GZ-JC-18L-27K GZ-JC-18L-30K	GZ-JC-WP-3W-32K	GZ-S8-32K
:: Wattage	3W	2W	3W	1.4W
:: Lumens	180LM	250LM	180LM	70LM
:: Voltage	12V AC/DC	12V AC/DC	12V AC/DC	12V AC/DC
:: Color Temp	2700K, 3000K	2700K, 3000K	3200K	3200K
:: Beam Angle	360°	360°	360°	360°

#### DUAL-TAP (12V/15V AC) LANDSCAPE TRANSFORMERS WITH TIMER & PHOTOCELL **SLIDE DOOR**

:: Catalog No.	TR-40W-DT-TPC-SS	TR-75W-DT-TPC-SS	TR-100W-DT-TPC-SS	TR-200W-DT-TPC-SS
:: Wattage	40W	75W	100W	200W
:: Finish	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
:: Input Voltage	120V 60Hz	120V 60Hz	120V 60Hz	120V 60Hz
:: Terminal Blocks	2	2	2	2
:: Dimensions	L 8.2" - W 3.67" - H 4.2"		L 11.35" - W 4	1.05" - H 4.05"

:: Accessories included



Built-in timer Non-removable pins



Built-in Photocell Non-removable



6 Foot plug-in cord



Magnetic circuit breaker on secondary to protect lighting system









E32





# MULTI-TAP (12V/13V/14V/15V AC) LANDSCAPE TRANSFORMERS TIMER & PHOTOCELL READY NOT INCLUDED - HINGE DOOR

:: Catalog No.	TR-150W-MT-SS	TR-300W-MT-SS	TR-600W-MT-SS	TR-900W-MT-SS
:: Wattage	150W	300W	600W	900W
:: Finish	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
:: Input Voltage	120V 60Hz	120V 60Hz	120V 60Hz	120V 60Hz
:: Terminal Blocks	2	2	2	2
:: Dimensions	L 11.4" - W 5.4" - H 5.3"	L 12.6" - W 5.9" - H 5.9"	L 14.3" - W 6.7" - H 6.7"	L 18.1" - W 7.9" - H 7.9"

:: Options







	PLUG-IN MECHANICAL TIMER	PLUG-IN DIGITAL TIMER	PLUG-IN PHOTOCELL
:: Catalog No.	TR-MTMR	TR-DTMR	TR-PC
:: Description	24-Hour 3-Prong Mechanical Plug-in Timer	7-Day 3-Prong Digital Plug-in Timer	Photocell with Plug-in Molex Connector

:: Accessories included




6 Foot plug-in cord included with Transformers










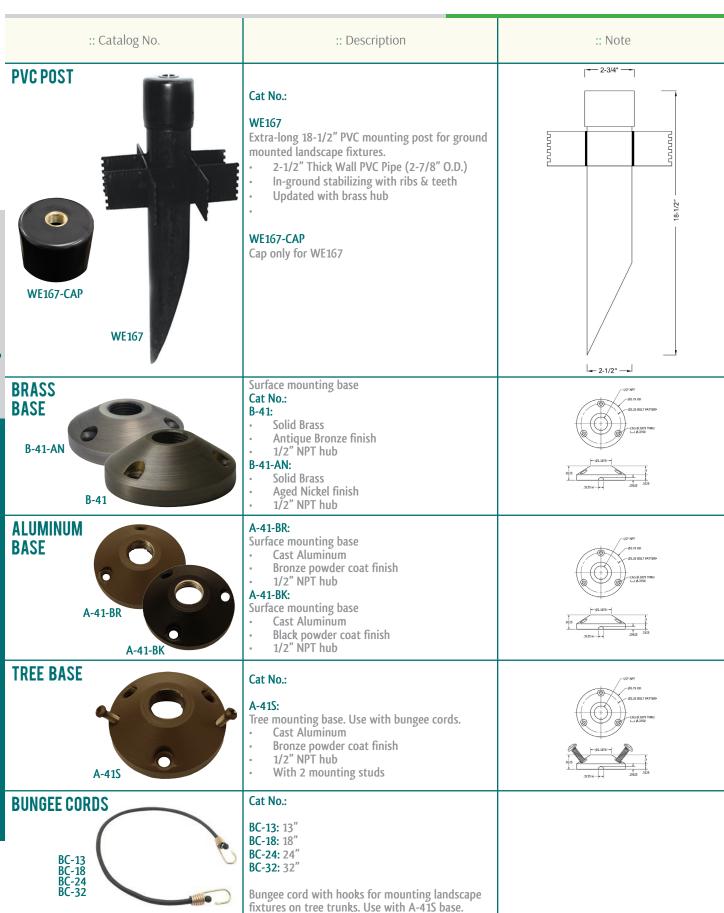



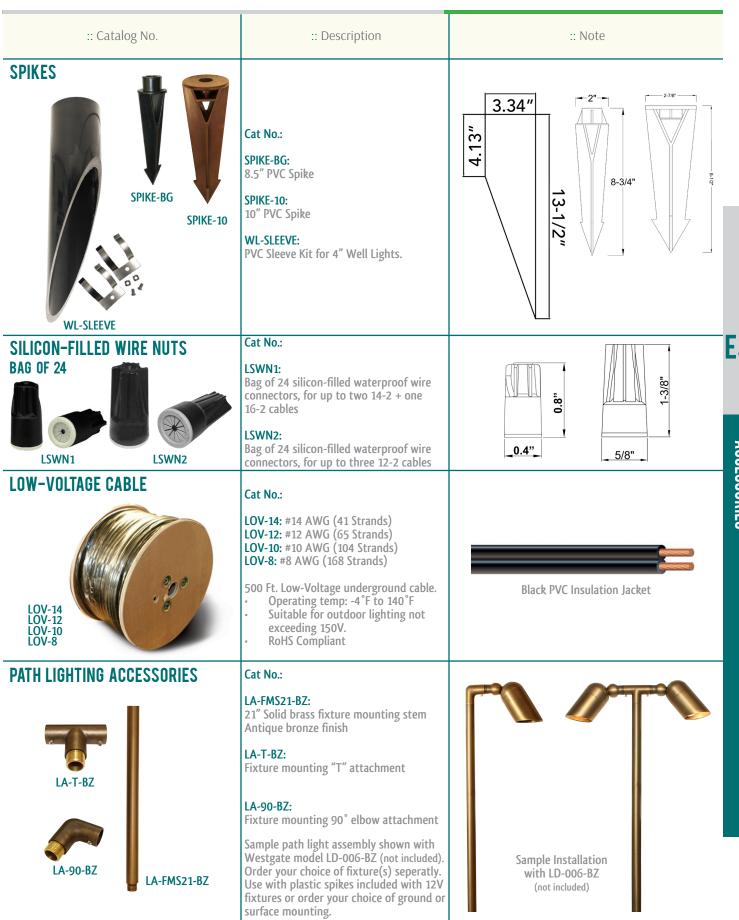



	LANDSONI E EIGHTING AGGESSONIE	<u> </u>	
	:: Catalog No.	:: Description	:: Note
	12V SNAP CONNECTOR  WE-CONN	Cat No.:  Main Cable: 10/2, 12/2, 14/2 Fixture Cable: 16/2, 18/2  Black Color	
	AREA LIGHTING REPLACEMENT PARTS	Cat No.:	Fit: Knob
<b>F</b> 00	LA-STEM-RL LA-STEM-KNOB	LA-STEM-KNOB: Replacement Knob  LA-STEM-RL: Replacement Lens  LA-STEM-REPL-LED:	Lens
E36	LA-STEM-REPL-LED	Replacement LED Tower Fits Pagoda Lights  Fits Pagoda Wire  Fits Pagoda Lights  Fits Pagoda Lights	LED Tower
ACCESSORIES	STEP LIGHTING REPLACEMENT LED MODULE	Cat No.: LED-REPL-LED	Fits:
RIES	LS-REPL-LED	Replacement LED Module for: LS-155-BZ LS-155-BZ  - 3 Watts - 200 Lumens - 3000K - 12V AC/DC - Built-in Diver	
	PAGODA LIGHTS REPLACEMENT GLASS		Fit:
		Cat No.:  AA-145-RG: Relacement Glass for 2-Tier Pagodas  AA-146-RG: Relacement Glass for 3-Tier Pagodas  AA-147-RG: Relacement Glass for 4-Tier Pagodas	
	AA-145-RG AA-146-RG AA-147-RG		1 1 1

