



# Exit Sign & Emergency Lighting

Westgate's exit signs and emergency lighting products feature state of the art design features and long life LED technology to meet NFPA and UL 924 requirements.



**TECHNICAL SPECIFICATIONS:**


- :: High impact thermoplastic LED exit with emergency battery backup
- :: Energy efficient LED panel, 3.2 watts (red) 3.8 watts (green), 25-year rated
- :: 120/277-volt operation
- :: Universal canopy for side or top mounting on wall or ceiling
- :: Easy snap-out left or right arrows
- :: 4.8V maintenance-free Ni-Cad battery for long life
- :: Low profile compact design, available in white or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Universal exit: single or double face – wall or ceiling mount
- :: Mounting accessories included
- :: UL-listed for damp locations, meets UL924, NFPA 101 Life Safety Code
- :: 5-year warranty

**LED EXIT SIGN**

CATALOG NO.	LETTERS	NUMBER OF FACEPLATES	FACEPLATE	VOLTAGE	BATTERY
XT-RW-EM	Red	Universal Single/Double	White	120/277	Ni-Cad
XT-GW-EM	Green	Universal Single/Double	White	120/277	Ni-Cad
XT-RB-EM	Red	Universal Single/Double	Black	120/277	Ni-Cad
XT-GB-EM	Green	Universal Single/Double	Black	120/277	Ni-Cad

G1

THERMOPLASTIC LED EXIT SIGN

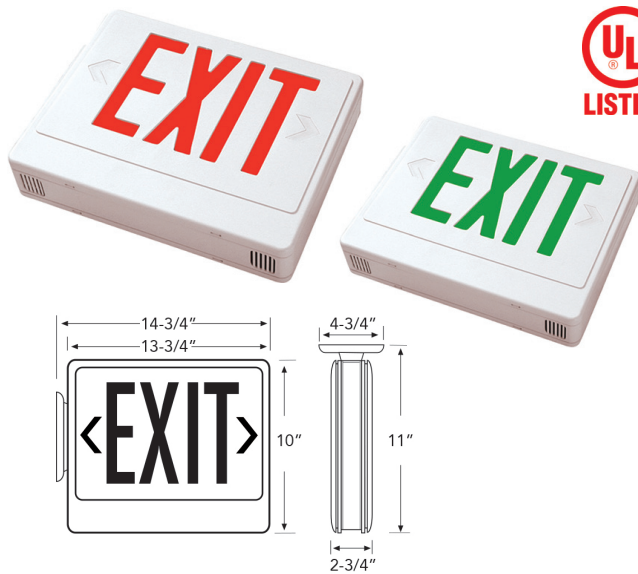


**TECHNICAL SPECIFICATIONS:**

- :: High impact thermoplastic LED exit with emergency battery backup
- :: Energy efficient LED panel, 3.2 watts (red) 3.8 watts (green), 25-year rated, 11 watts remote capacity
- :: 120/277-volt operation
- :: Universal canopy for side or top mount (for wall and ceiling installation)
- :: Easy snap-out left or right arrows
- :: 6.0V maintenance-free lead acid 4.5 Ah battery for long life
- :: Low profile compact design, available in white or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Runs for longer time without remote heads
- :: Universal exit: single or double face – wall or ceiling mount
- :: Mounting accessories included
- :: UL-listed for damp locations, meets UL924, NFPA 101 Life Safety Code
- :: 5 year warranty

**LED EXIT SIGN WITH REMOTE CAPABILITY**

CATALOG NO.	LETTERS	NUMBER OF FACEPLATES	FACEPLATE	VOLTAGE	BATTERY
XT-RCRW-EM	Red	Universal Single/Double	White	120/277	Lead Acid
XT-GCGW-EM	Green	Universal Single/Double	White	120/277	Lead Acid
XT-RCRB-EM	Red	Universal Single/Double	Black	120/277	Lead Acid
XT-GCGB-EM	Green	Universal Single/Double	Black	120/277	Lead Acid

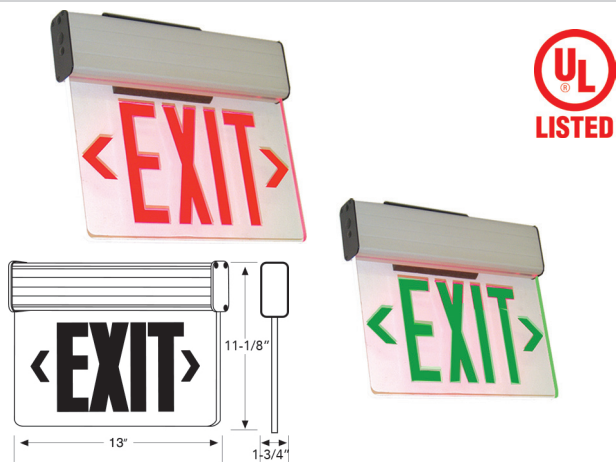


**TECHNICAL SPECIFICATIONS:**

- :: Specification grade exit with emergency battery backup (90 minutes)
- :: Extruded aluminum canopy with clear acrylic panel
- :: Universal mounting plate for back, top, or side mounting
- :: Energy efficient LED panel, 4.5 watts (red) 4.8 watts (green), 25-year rated 120/277-volt operation
- :: Single or double face (Mylar insert used for double face\*)
- :: Left or right arrow
- :: 4.8 V Ni-Cad battery for long life (0-50 deg C)
- :: Low profile compact design
- :: 90-minute EM-rated with push style test switch and red indicator light mounting accessories included
- :: Also available with plastic housing

**EDGELIT LED EXIT SIGN**

CATALOG NO.	LETTERS	FACEPLATE	TRIMPLATE	VOLTAGE	BATTERY	CUSTOMIZE
<b>XE-1RCA-EM</b>	Red	Single Face Clear	Aluminum	120/277	Lead Acid	Black housing & white faceplate
<b>XE-1GCA-EM</b>	Green	Single Face Clear	Aluminum	120/277	Lead Acid	Black housing & white faceplate
<b>XE-1RCW-EM</b>	Red	Single Face Clear	White	120/277	Lead Acid	Black housing & white faceplate
<b>XE-1GCW-EM</b>	Green	Single Face Clear	White	120/277	Lead Acid	Black housing & white faceplate
<b>XE-2RMW-EM</b>	Red	Double Face Mirror	White	120/277	Lead Acid	Black housing & white faceplate
<b>XE-2GMW-EM</b>	Green	Double Face Mirror	White	120/277	Lead Acid	Black housing & white faceplate
<b>XE-2RMA-EM</b>	Red	Double Face Mirror	Aluminum	120/277	Lead Acid	Black housing & white faceplate
<b>XE-2GMA-EM</b>	Green	Double Face Mirror	Aluminum	120/277	Lead Acid	Black housing & white faceplate

G2

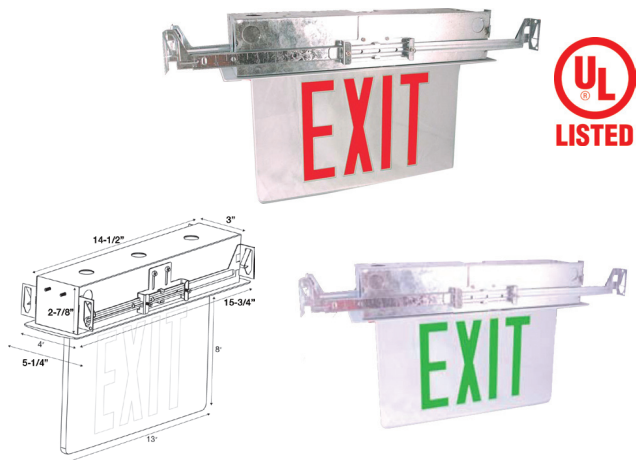

**TECHNICAL SPECIFICATIONS:**

- :: Specification grade exit with emergency battery backup (90 minutes)
- :: Recessed canopy with extruded aluminum housing
- :: Energy efficient LED panel, 4.5 watts (red) 4.8 watts (green), 25-year rated 120/277-volt operation
- :: Single or double face (Mylar insert used for double face\*)
- :: Left or right arrow
- :: 4.8 V Ni-Cad battery for long life (0-50 deg C)
- :: Low profile compact design
- :: 90-minute EM-rated with push style test switch and red indicator light mounting accessories included
- :: Adjustable (24") bar hangers compatible for use in T-bar ceilings
- :: Mounting accessories included

**RECESSED EDGELIT LED EXIT SIGN**


CATALOG NO.	LETTERS	FACEPLATE	TRIMPLATE	VOLTAGE	BATTERY	CUSTOMIZE
<b>XTR-1RCA-EM</b>	Red	Single Face Clear	Aluminum	120/277	Lead Acid	Black housing & white faceplate
<b>XTR-1GCA-EM</b>	Green	Single Face Clear	Aluminum	120/277	Lead Acid	Black housing & white faceplate
<b>XTR-1RCW-EM</b>	Red	Single Face Clear	White	120/277	Lead Acid	Black housing & white faceplate
<b>XTR-1GCW-EM</b>	Green	Single Face Clear	White	120/277	Lead Acid	Black housing & white faceplate
<b>XTR-2RMW-EM</b>	Red	Double Face Mirror	White	120/277	Lead Acid	Black housing & white faceplate
<b>XTR-2GMW-EM</b>	Green	Double Face Mirror	White	120/277	Lead Acid	Black housing & white faceplate
<b>XTR-2RMA-EM</b>	Red	Double Face Mirror	Aluminum	120/277	Lead Acid	Black housing & white faceplate
<b>XTR-2GMA-EM</b>	Green	Double Face Mirror	Aluminum	120/277	Lead Acid	Black housing & white faceplate

EDGELIT LED EXIT SIGN



**TECHNICAL SPECIFICATIONS:**

- :: Dual 120/277 voltage
- :: Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- :: 2.4V long life, maintenance-free, rechargeable NiCd battery
- :: Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- :: Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

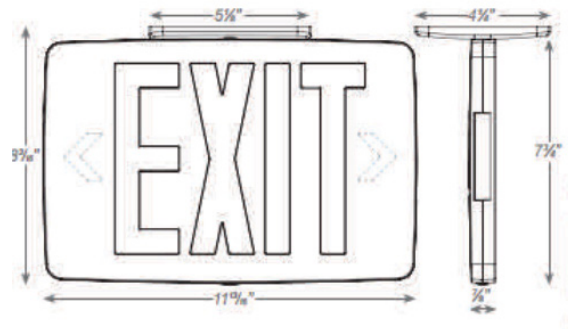

**THIN DIECAST LED EXIT SIGN**

CATALOG NO.	LETTERS	FACEPLATE	BODY	VOLTAGE	BATTERY
<b>XD-TH-1GAAEM</b>	Green	Single Face Aluminum	Aluminum	120/277	Battery backup
<b>XD-TH-1GBBEM</b>	Green	Single Face Black	Black	120/277	Battery backup
<b>XD-TH-1GWWEM</b>	Green	Single Face White	White	120/277	Battery backup
<b>XD-TH-1RAAEM</b>	Red	Single Face Aluminum	Aluminum	120/277	Battery backup
<b>XD-TH-1RBBEM</b>	Red	Single Face Black	Black	120/277	Battery backup
<b>XD-TH-1RWWEM</b>	Red	Single Face White	White	120/277	Battery backup
<b>XD-TH-2GAAEM</b>	Green	Double Face Aluminum	Aluminum	120/277	Battery backup
<b>XD-TH-2GBBEM</b>	Green	Double Face Black	Black	120/277	Battery backup
<b>XD-TH-2GWWEM</b>	Green	Double Face White	White	120/277	Battery backup
<b>XD-TH-2RAAEM</b>	Red	Double Face Aluminum	Aluminum	120/277	Battery backup
<b>XD-TH-2RBBEM</b>	Red	Double Face Black	Black	120/277	Battery backup
<b>XD-TH-2RWWEM</b>	Red	Double Face White	White	120/277	Battery backup


G3

DIECAST LED EXIT SIGN




**TECHNICAL SPECIFICATIONS:**

- :: NEMA 4X Wet Location requirements
- :: UV stabilized polycarbonate housing and lens, 5VA flame rating
- :: Impact resistant housing with seamless silicon gasket
- :: Energy efficient LED panel, 3.2 watts (red) 3.8 watts (green), 25-year rated
- :: 120/277-volt operation
- :: Universal canopy for side or top mount (for wall and ceiling installation)
- :: Easy snap-out left or right arrows
- :: 4.8V maintenance free Ni-Cad battery for long life
- :: Low profile compact design, available in white only
- :: 90-minute rated with push style test switch and red indicator light
- :: Top or back mount only—single face only
- :: Cold weather -4°F minimum operating temperature
- :: UL-listed for wet locations, meets UL924, NFPA 101 Life Safety Code

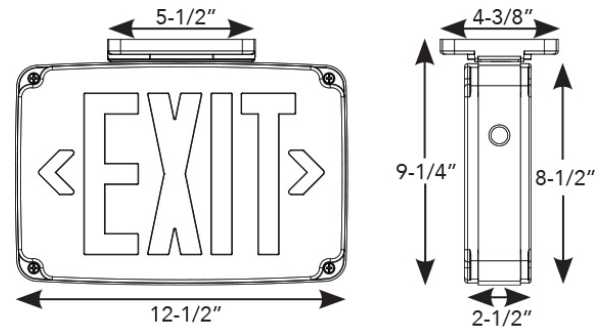

**WET LOCATION EXIT SIGN**

CATALOG NO.	LETTERS	NUMBER OF FACEPLATES	FACEPLATE	VOLTAGE	BATTERY
XT-WP-RG-EM	Gray	Double Face	Red	120/277	4.8V Ni-Cad
XT-WP-GG-EM	Gray	Double Face	Green	120/277	4.8V Ni-Cad
XT-WP-BLNKP		Single face conversion blank face plate			

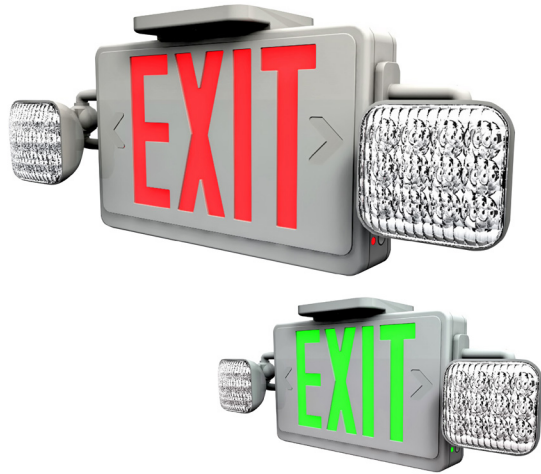

**TECHNICAL SPECIFICATIONS:**

- :: High-impact thermo-plastic LED exit and emergency light
- :: Even illumination across the face without LED imaging
- :: Energy-efficient LED panel, 3.2 watts (Red) 3.8 watts (Green), 25-year rated
- :: Two fully adjustable 1-watt glare-free LED heads for safe egress
- :: 120/277 volt operation (20-40°C)
- :: Top canopy included for ceiling installation
- :: EZ snap-out left or right arrow knock outs
- :: 96V maintenance-free sealed Ni-Cad rechargeable battery for long life
- :: Low profile compact design, available in white or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Universal exit: single or double face – wall (back) or ceiling mount
- :: Mounting accessories included
- :: UL-listed for damp locations, meets UL924, NFPA 101 Life Safety Code


**COMBINATION LED EXIT SIGN & LED EMERGENCY**

CATALOG NO.	LETTERS	NUMBER OF FACEPLATES	FACEPLATE	VOLTAGE	BATTERY	CUSTOMIZE
XT-CL-RW-EM	Red on Aluminum	Universal Single/Double	White	120/277	4.8V Ni-Cad	Black Housing
XT-CL-GW-EM	Green on Aluminum	Universal Single/Double	White	120/277	4.8V Ni-Cad	Black Housing



**TECHNICAL SPECIFICATIONS:**

- :: High-impact die-cast aluminum LED exit and emergency light
- :: Even illumination across the face without LED imaging
- :: Energy-efficient LED panel, 3.2 watts (Red) 3.8 watts (Green), 25-year rated
- :: Two fully adjustable 3-watt LED, glare-free heads for safe egress
- :: 120/277 volt operation (20-40°C)
- :: Top canopy included for ceiling installation
- :: EZ snap-out left or right arrow knock outs
- :: 8.4V maintenance-free sealed Ni-Cad rechargeable battery for long life
- :: Low profile compact design, available in white or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Universal exit: single or double face – wall (back) or ceiling mount
- :: Mounting accessories included
- :: UL-listed for damp locations, meets UL924, NFPA 101 Life Safety Code

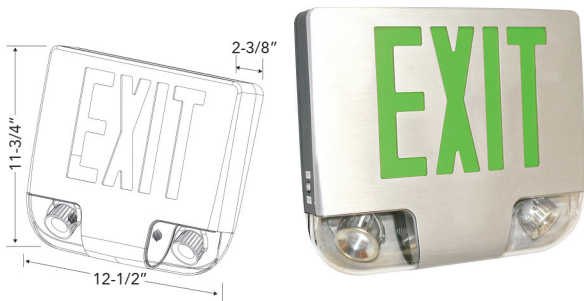

**ALUMINUM LED EXIT SIGN WITH ADJUSTABLE LED HEADS**

CATALOG NO.	LETTERS	NUMBER OF FACEPLATE	HOUSING	VOLTAGE	BATTERY	CUSTOMIZE
XT-C-ADJ-3RBAEM	Red on Aluminum	Universal Single/Double	Black	120/277	Ni-Cad	Aluminum or white housing
XT-C-ADJ-3GBAEM	Green on Aluminum	Universal Single/Double	Black	120/277	Ni-Cad	or Black/White Faceplate


G5

COMBINATION LED



**TECHNICAL SPECIFICATIONS:**

- :: High-impact thermo-plastic LED exit and emergency light
- :: Even illumination across the face without LED imaging
- :: Energy-efficient LED panel, 3.2 watts (Red) 3.8 watts (Green), 25-year rated
- :: Two fully adjustable 5.4 watts incandescent, glare-free heads for safe egress
- :: 120/277 volt operation (20-40°C)
- :: Top canopy included for ceiling installation
- :: EZ snap-out left or right arrow knock outs
- :: 6V maintenance-free sealed Ni-Cad rechargeable battery for long life
- :: Low profile compact design, available in white or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Universal exit: single or double face – wall (back) or ceiling mount
- :: Mounting accessories included
- :: ETL-listed for wet locations, meets UL924, NFPA 101 Life Safety Code



**WET LOCATION COMBINATION EXIT SIGN & EMERGENCY**

CATALOG NO.	LETTERS	NUMBER OF FACEPLATE	FACEPLATE	VOLTAGE	BATTERY	CUSTOMIZE
XT-CWP-RG-EM	Red	Universal Single/Double	Gray	120/277	Ni-Cad	Black housing
XT-CWP-GG-EM	Green	Universal Single/Double	Gray	120/277	Ni-Cad	Black housing



**TECHNICAL SPECIFICATIONS:**

- :: High-impact die-cast aluminum LED exit and emergency light
- :: Even illumination across the face without LED imaging
- :: Energy-efficient LED panel, 3.2 watts (Red) 3.8 watts (Green), 25-year rated
- :: Two fully adjustable 3-watt LED, glare-free heads for safe egress
- :: 120/277 volt operation (20-40°C)
- :: Top canopy included for ceiling installation
- :: EZ snap-out left or right arrow knock outs
- :: 8.4V maintenance-free sealed Ni-Cad rechargeable battery for long life
- :: Low profile compact design, available in white or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Universal exit: single or double face – wall (back) or ceiling mount
- :: Mounting accessories included
- :: UL-listed for damp locations, meets UL924, NFPA 101 Life Safety Code





**WET LOCATION COMBINATION EXIT SIGN & EMERGENCY**

CATALOG NO.	LETTERS	NUMBER OF FACEPLATE	HOUSING COLOR	OPTIONS
CWLEZXTE	R Red	1 Single Face	W White	TP Tamper Proof Screws CUSTOM Custom Wording
	G Green		B Black	
		2 Double Face	G Gray (with white face plate)	CW Cold Weather RC Remote Capacity SDT Self Diagnostics

# EL-1

**TECHNICAL SPECIFICATIONS:**

- :: High impact thermo-plastic emergency light
- :: Two fully adjustable 1 watt, glare-free LED lamp heads for safe egress
- :: Dual voltage: 120/277
- :: Operating temperature: 20-50°C
- :: 3.6V maintenance-free Ni-Cad rechargeable battery for long life
- :: Low profile compact design, available in white or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Surf mount with top and side knockout for conduit
- :: UL Listed for damp locations, UL924, NFPA 101 Life Safety Code
- :: Optional: High lumen LED lamp heads (1.5 watt) available (HL)

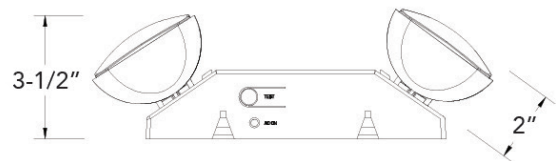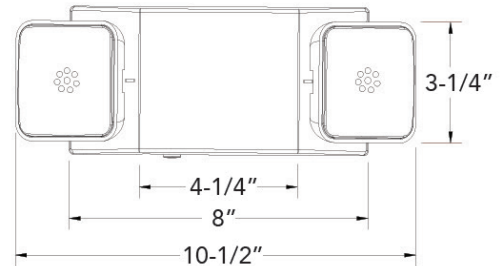

G7

LED EMERGENCY LIGHTS

## LED EMERGENCY LIGHTS

CATALOG NO.	HOUSING	HEADS	VOLTAGE	BATTERY	NOTES
EL-1	White	(2) 1W	120/277V	Ni-Cad	Universal mount: wall & ceiling
EL-1-B	Black	(2) 1W	120/277V	Ni-Cad	




# EL-2



**TECHNICAL SPECIFICATIONS:**

- :: High impact thermo-plastic emergency light
- :: Two fully adjustable 1 watt, glare-free LED lamp heads for safe egress
- :: Dual voltage: 120/277
- :: Operating temperature: 20-50°C
- :: Top and back K.O.'s for conduit mounting (1/2")
- :: 3.6V maintenance-free Ni-Cad rechargeable battery for long life
- :: Low profile compact design, available in white or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Surf mount with top and side knockout for conduit
- :: UL Listed for damp locations, UL924, NFPA 101 Life Safety Code
- :: Optional: High lumen LED lamp heads (1.5 watt) available (HL)

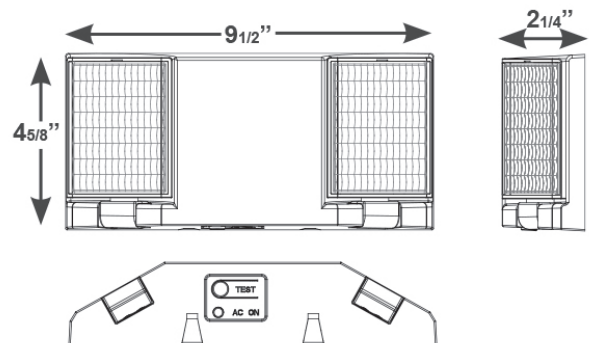


G8

LED EMERGENCY LIGHTS

## REMOTE CAPABLE LED EMERGENCY LIGHTS

CATALOG NO.	HOUSING	HEADS	VOLTAGE	BATTERY	NOTES
EL-2	White	(2) 1W	120/277V	Ni-Cad	Universal mount: wall & ceiling
EL-2-B	Black	(2) 1W	120/277V	Ni-Cad	

# EW-16

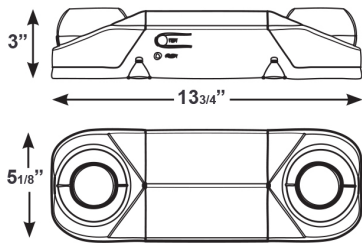

**TECHNICAL SPECIFICATIONS:**


- :: High impact thermo-plastic emergency light with polycarbonate cover available in Wet location with seamless silicon gasket
- :: Two fully adjustable 7-watt MR16 halogen lamp heads for safe egress
- :: Improved beam control for increased spacing and illumination
- :: Dual voltage: 120/277
- :: Operating temperature: 20-50°C
- :: 6V maintenance-free lead acid rechargeable battery for long life
- :: Low profile compact design, available in white, gray or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Mounting: wall mounting with KO's in back plate
- :: UL-listed for wet locations, meets UL924, NFPA 101 Life Safety Code (Only for EW-16-WP)



## MR16 EMERGENCY LIGHTS

CATALOG NO.	HOUSING	HEADS	VOLTAGE	BATTERY	NOTES
EW-16	White	(2) 7W MR16	120/277V	6V Lead Acid	Universal mount: wall & ceiling
	Black	(2) 7W MR16	120/277V	6V Lead Acid	

# EW-16-WP

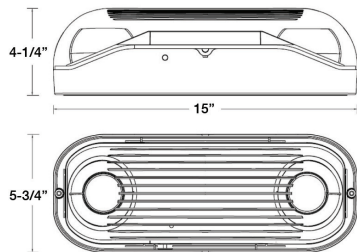

**TECHNICAL SPECIFICATIONS:**

- :: High impact thermo-plastic emergency light with polycarbonate cover available in Wet location with seamless silicon gasket
- :: Two fully adjustable 7-watt MR16 halogen lamp heads for safe egress
- :: Improved beam control for increased spacing and illumination
- :: Dual voltage: 120/277
- :: Operating temperature: 20-50°C
- :: 6V maintenance-free lead acid rechargeable battery for long life
- :: Low profile compact design, available in white, gray or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Mounting: wall mounting with KO's in back plate
- :: UL-listed for wet locations, meets UL924, NFPA 101 Life Safety Code (Only for EW-16-WP)



## MR16 EMERGENCY LIGHTS

CATALOG NO.	HOUSING	HEADS	VOLTAGE	BATTERY	NOTES
EW-16-WP	Gray	(2) 7W MR16	120/277V	6V Lead Acid	Universal mount: wall & ceiling



**TECHNICAL SPECIFICATIONS:**

- :: High-impact thermo-plastic housing
- :: Wet location listed with seamless silicon gaskets
- :: Integral breather vent and sealed test switch
- :: Two fully-adjustable 1.5-watt LED heads
- :: Lead acid battery
- :: Optional: 4 watts of remote capacity RC
- :: Dual voltage: 120/277
- :: Operating temperature: 20-50°C
- :: External wall mounting bracket built into housing
- :: 90-minute rated with push style test switch and red indicator light
- :: UL-listed for wet locations, meets UL924, NFPA 101 Life Safety Code



**INDOOR LED EMERGENCY LIGHTS WITH REMOTE CAPABILITY**

CATALOG NO.	HOUSING	HEADS	VOLTAGE	BATTERY
LESDXR627	White	27W	120/277V	9.6 Ni-Cad

**LEDTFX**



**TECHNICAL SPECIFICATIONS:**

- :: High-impact thermo-plastic housing
- :: Wet location listed with seamless silicon gaskets
- :: Integral breather vent and sealed test switch
- :: Two fully-adjustable 1.5-watt LED heads
- :: Lead acid battery
- :: Optional: 4 watts of remote capacity RC
- :: Dual voltage: 120/277
- :: Operating temperature: 20-50°C
- :: External wall mounting bracket built into housing
- :: 90-minute rated with push style test switch and red indicator light
- :: UL-listed for wet locations, meets UL924, NFPA 101 Life Safety Code



**WET LOCATION LED EMERGENCY LIGHTS WITH REMOTE CAPABILITY**

CATALOG NO.	HOUSING	HEADS	VOLTAGE	BATTERY
LEDTFX-2	Gray	(2) 1.5W	120/277V	9.6 Ni-Cad

**G10**

**WET LOCATION EMERGENCY LIGHTS**

# DBEL




**TECHNICAL SPECIFICATIONS:**

- :: Universal 120-277VAC voltage
- :: Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- :: 4.8V long life, maintenance-free, rechargeable NiCd battery
- :: Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- :: Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- :: Self-diagnostic test feature continually diagnoses units performance and tests system to ensure reliable operation and to meet electrical and life safety codes
- :: Field-selectable wiring allows for "AC" operation of the unit to be controlled using a wall-switch or a photocell or any other switching mechanism



G11

DECORATIVE EMERGENCY LIGHTS

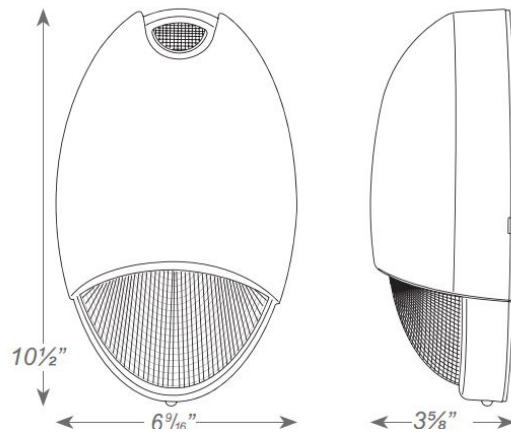

**DECORATIVE OUTDOOR LED AC/EMERGENCY UNIT (CAN BE SET ON ALL NIGHT)**

CATALOG NO.	HOUSING COLOR	OPTIONS
DBEL-ACEM-HL	W White B Black BR Gray (with white face plate) N Nickel	CW Cold Weather PC Photocell Sensor (Standard) SDT Self Diagnostics (Standard)

# RHLED-P & SRH




RHLED1-R1-P



RHLED2-R1-P



SRH-2-SM



SRH-1-LG

**FEATURES:**

- :: Fully adjustable LED remote lamp heads
- :: For use with remote capacity exits and emergency lighting units



## LED LAMP HEADS

CATALOG NO.	VOLTAGE	HOUSING	MATERIAL	LAMPS	NOTES
RHLED1-R1-P	3.6V	White	Plastic	(1) 1W LED	Indoor
RHLED2-R1-P	3.6V	White	Plastic	(1) 1W LED	Indoor
SRH-2-SM					
SRH-1-LG					

# RHLED-WP



RHLED1-CLPXTE



RHLED2-CLPXTE

**FEATURES:**

- :: Fully adjustable LED remote lamp heads
- :: For use with remote capacity exits and emergency lighting units



## LED LAMP HEADS

CATALOG NO.	VOLTAGE	HOUSING	MATERIAL	LAMPS	NOTES
RHLED1-WP	9.6V	White	Diecast Aluminum	(1) 1-watt LED	Outdoor
RHLED2-WP	9.6V	White	Diecast Aluminum	(2) 1-watt LED	Outdoor

**TECHNICAL SPECIFICATIONS:**


- ∴ High-impact resistant polycarbonate material
- ∴ Mounting hardware provided for easy installation

**APPLICATIONS:**

- ∴ Ideal for added environmental protection for exits and emergency lights.
- ∴ Great for gyms, locker rooms, schools, universities, apartment buildings, and other public areas



PCS-1

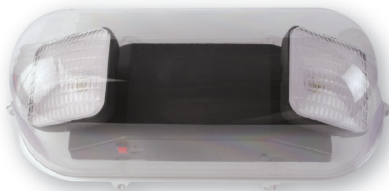

BGR-1



BG-1



BG-3C

**POLYCARBONATE VANDAL/ENVIRONMENTAL SHIELD GUARDS**

CATALOG NO.	LENGTH	WIDTH	DEPTH	NOTES
PCS-1	13-3/16"	9-3/16"	2-1/2"	For use with most standard exit signs
BG-1	22"	15"	7-3/4"	For use with most standard exit signs
BGR-1	18"	7-1/2"	7"	For use with most standard emergency lights
BG-3C	30-1/4"	13-3/4"	6-1/2"	For use with most standard combo exit signs

G13

VANDAL SHIELDS & WIRE GUARDS

<EXIT>

MEMORIAL FOR THE VETERANS OF THE WORLD

Name	Date
John Doe	1945
Jane Smith	1946
Robert Johnson	1947
Mary White	1948
William Brown	1949
Elizabeth Green	1950
Thomas Black	1951
Sarah Gray	1952
Michael Red	1953
Laura Blue	1954
David Yellow	1955
Jessica Purple	1956
Christopher Orange	1957
Amanda Pink	1958
Matthew Silver	1959
Stephanie Gold	1960

