


The device uses F4TS as an interface software to BMS.


To download it please go to <https://f4tserial.com>

After installing the app, load the configuration file "FSP1ENG46.json" found in the [www.flightsim.pro](http://www.flightsim.pro) downloads section.

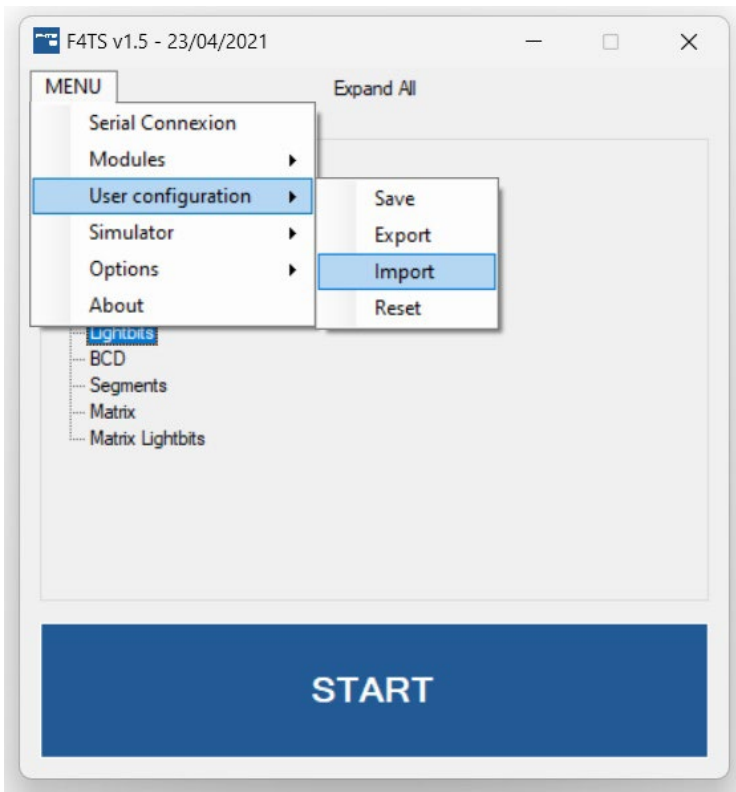

Unfortunately due software limitations, the configuration only works for a predetermined COM port so you will have to change the COM port number of the device to 46.

To do that go to Windows Settings/ Device Manager - select the device in the Ports section:

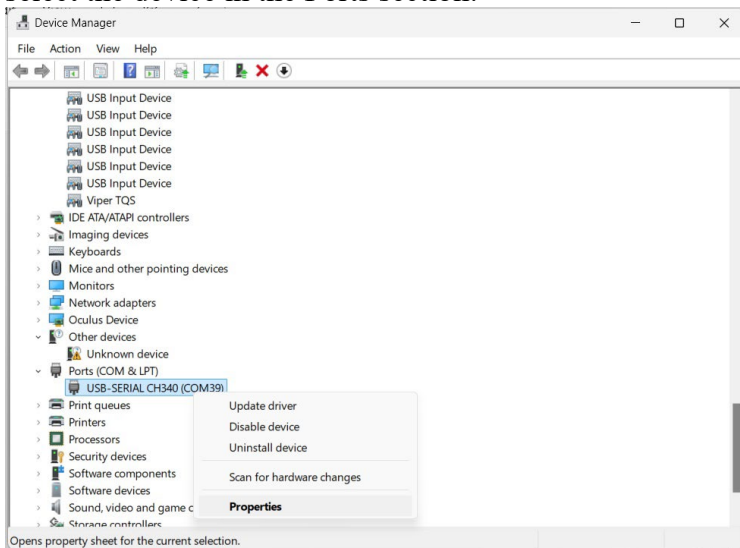

Select Properties - Advanced - and change the COM Port number to 46

USB-SERIAL CH340 (COM39) Properties

General

Port Settings

Driver

Details

Events

Bits per second: 9600

Data bits: 8

Parity: None

Stop bits: 1

Flow control: None

Advanced...

Restore Defaults

OK

Cancel

Advanced Settings for COM46

☒ Use FIFO buffers (requires 16550 compatible UART)

Select lower settings to correct connection problems.

Select higher settings for faster performance.

Receive Buffer: Low (1)

High (14) (14)

Transmit Buffer: Low (1)

High (16) (16)

COM Port Number: COM46

OK

Cancel

Defaults

Hit START for the application to run in the background while running BMS

