


RelentlessSCRATCH-RESISTANT SPC



Diamond Gard™

Next Generation Coating System

Diamond Gard[™] is a proprietary acrylic-based coating that solves the main problem with typical vinyl products: scuffs and scratches.


All Power Dekor vinyl products are coated with Diamond GardTM as standard, however there are some products that have multiple coats for added protection.


Relentless Collection

Relentless is coated 7 layers of Diamond Gard[™], so there is no need for a wear layer.

This means clearer and crisper visuals, because there is no hazy wear layer between you and the HD printed graphics layer.




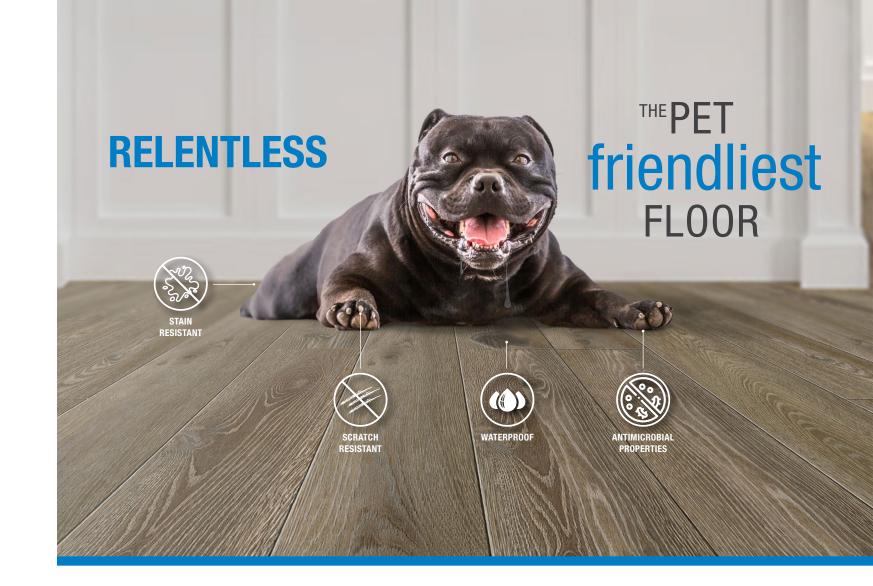

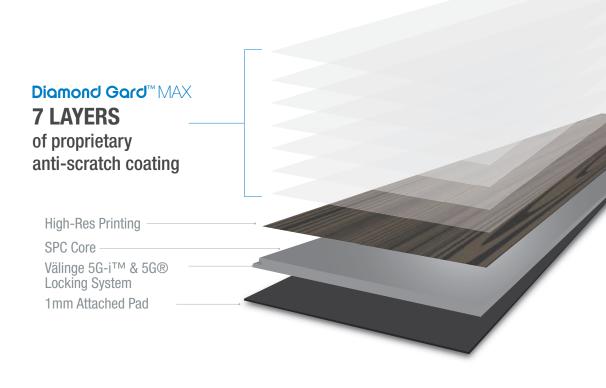

Relentless

SCRATCH-RESISTANT SPC

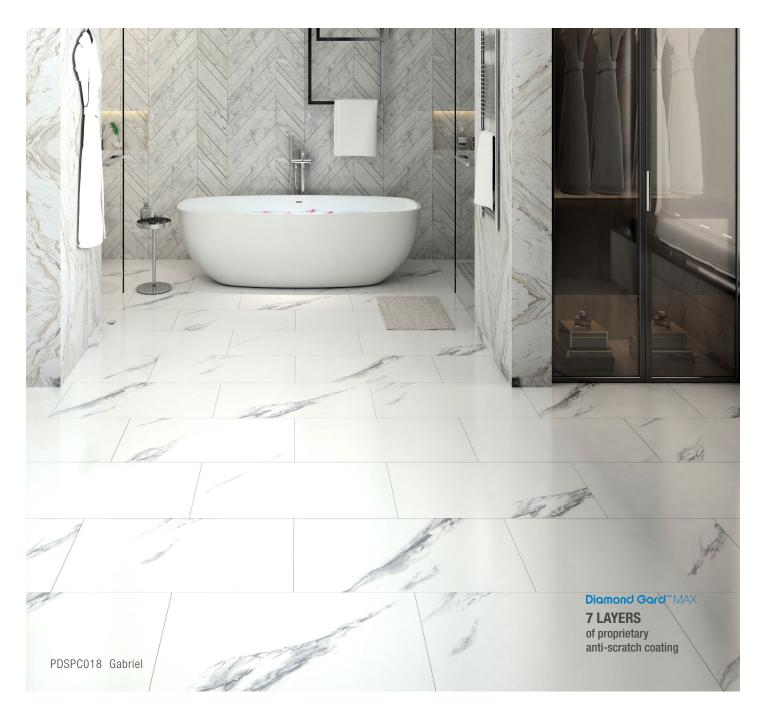

















Mornings Marble / PDSPC038



Charles / PDSPC019



Carter / PDSPC017



Atlas / PDSPC020




Wise Marble / PDSPC037



RELENTLESS COLLECTION

Gabriel / PDSPC018

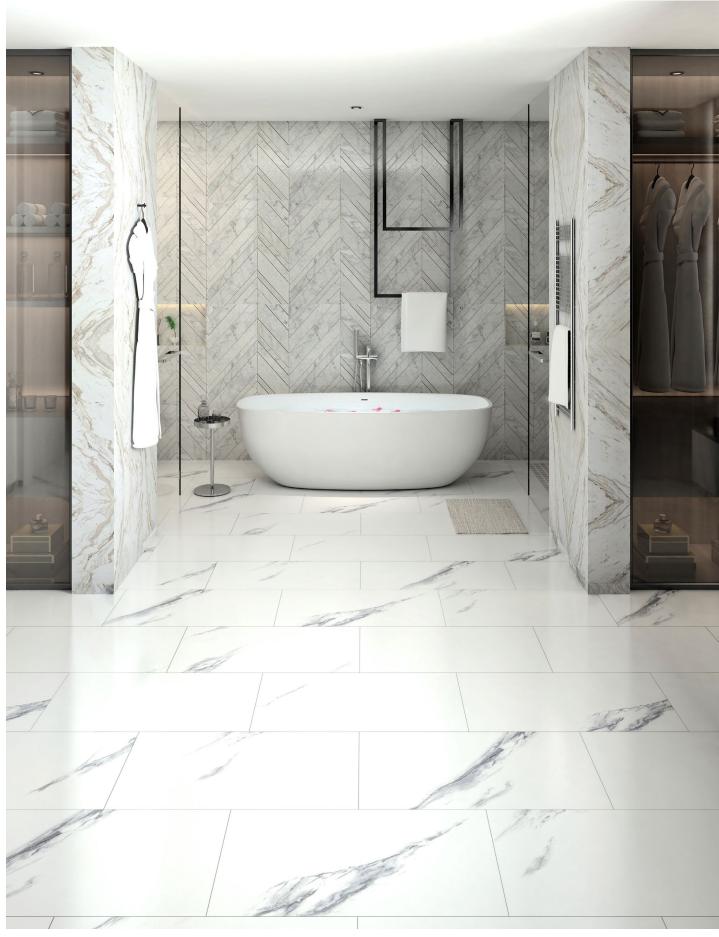

Relentless

SCRATCH-RESISTANT SPC

Construction:

Rigid Core SPC Vinyl Tile

Sizes: 12-1/4" x 24-3/8"

Total Thickness:

6 mm (5 mm Core + 1 mm Attached IXPE Pad)

IIC Rating: 69 db

Texture: Smooth

Edge Profile: V-Bevel

Finish: Diamond Gard™ Max (7 Layers of Anti-Scratch Coating)

Installation Method: Floating

Click System: Välinge 5G®

Installation Level:

On | Above | Below Grade

Three Season Room: Yes

Sq. Ft./Carton: 20.69

Cases/Pallet: 48

Sq. Ft./Pallet: 993

Warranties:

Lifetime Residential 20-Year Commercial 10-Year Scratch 10-Year Pet

Coordinating Moldings Available



Greenguard Gold 5G® locking









PDSPC038 Mornings Marble



PDSPC019 Charles 12-1/4" x 24-3/8"



PDSPC037 Wise Marble 12-1/4" x 24-3/8"



PDSPC020 Atlas

RELENTLESS COLLECTION

Peak Oak / PDSPC042




Logan / PDSPC013



Mason / PDSPC014



Range Pine / PDSPC043

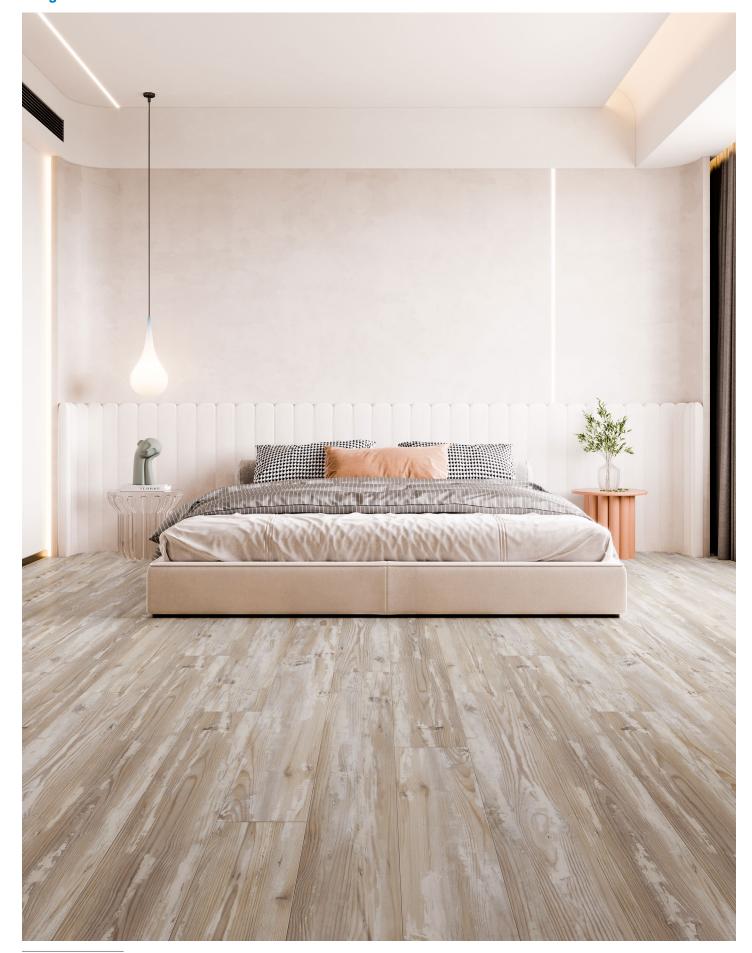

Veiled Pine / PDSPC044



Jackson / PDSPC016



RELENTLESS COLLECTION

Woods Oak / PDSPC047



Captain Oak / PDSPC046



Easton / PDSPC011



RELENTLESS COLLECTION


Café Acacia / PDSPC048



Harris / PDSPC012



Noah / PDSPC015

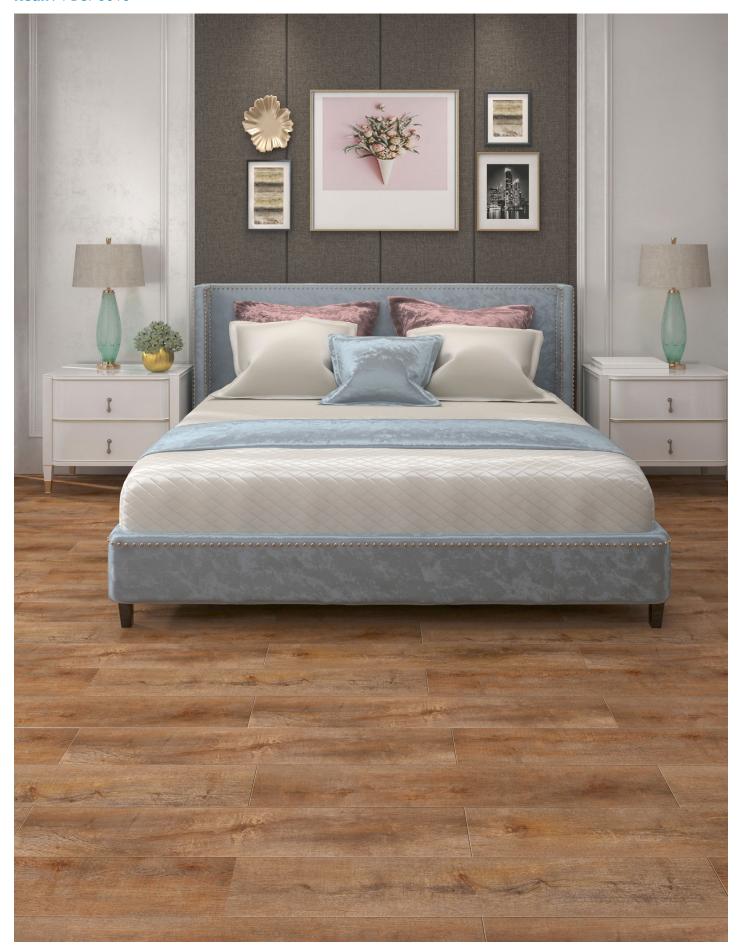

Relentless

SCRATCH-RESISTANT SPC

Construction:

Rigid Core SPC Vinyl Plank

Sizes: 7-1/16" x 48"

Total Thickness:

6 mm (5 mm Core + 1 mm

Attached IXPE Pad)

IIC Rating: 69 db

Texture: Smooth† | Embossed ‡

Edge Profile: V-Bevel

Finish: Diamond Gard[™] Max (7 Layers of Anti-Scratch Coating)

Installation Method: Floating

Click System:

Välinge 5G-i[†] | Unipush[‡]

Installation Level:

On | Above | Below Grade

Three Season Room: Yes

Sq. Ft./Carton: 23.64

Cases/Pallet: 48

Sq. Ft./Pallet: 1,064

Warranties:

Lifetime Residential 20-Year Commercial 10-Year Scratch 10-Year Pet

Coordinating Moldings Available



Certified








PDSPC013 Logan



























Coating

