



4" Cove Base



Contractor Grade

Item No.	CX400-040
Size (Inch)	4 inch x 4 feet strips
Colors	Black
Qty	120 feet per box



Contractor Grade

Item No.	CX400-048
Size (Inch)	4 inch x 4 feet strips
Colors	Gray
Qty	120 feet per box



Contractor Grade

Item No.	CX400-047
Size (Inch)	4 inch x 4 feet strips
Colors	Brown
Qty	120 feet per box




Contractor Grade

Item No.	CX400-050
Size (Inch)	4 inch x 4 feet strips
Colors	White
Qty	120 feet per box




Contractor Grade

Item No.	CX400-049
Size (Inch)	4 inch x 4 feet strips
Colors	Beige
Qty	120 feet per box



Contractor Grade

Item No.	CXRV400SIV-GRY
Size (Inch)	4 inch x 4 feet strips
Colors	Silver Gray
Qty	120 feet per box



Contractor Grade

Item No.	CX400-080
Size (Inch)	4 inch x 4 feet strips
Colors	Fawn
Qty	120 feet per box



AAT Adhesives



Professional Wood Flooring Adhesive

#583

- Unmatched green strength
- Minimizes cupping or lifting of plank flooring
- Eliminates hollow spots
- Easy spreading, no slump formula
- No chlorinated solvents
- Available in 3 gallon buckets



Polymer Wood Flooring Adhesive

#692

- Advanced polymer formula
- No moisture testing required [some restrictions apply]
- Easy spreading, no slump formula
- Easy clean up
- LEED qualified, VOC compliant formula



Acrylic Primer

#570

- Effectively primes and seals porous sub-floors
- Increases spread rate of new adhesive
- Enhances adhesive performance
- Provides an effective barrier from highly alkaline conditions
- Eliminates necessity of removing old adhesive residue
- Available in 4 gallon buckets




Premium Pressure Sensitive Adhesive

#620

- Ultra-aggressive formula
- Professional PSA for PVC, EVA, polypropylene, polyurethane cushion and bitumen carpet tile backings
- Tiles may be lifted and replaced without loss of bond
- CRI GLP, 0 VOC
- Protected by CleanGuard™ antimicrobial
- Available in 1 gallon and 4 gallon

Carpet Pad

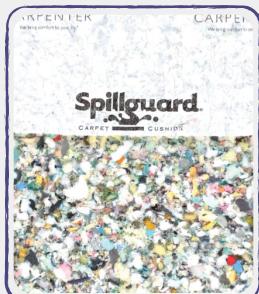

• EnviroStep Tahoe SpillGuard 8 lb Carpet Cushion

- SpillGuard carpet cushion helps prevent spills and accidents from penetrating the cushion
- Made from the same memory foam used in premium mattresses
- Compromised of approximately 90% recycled urethane trim
- Covers 30 sqyd



• EnviroStep Atlas 7/16 Carpet Cushion

- Helps reduce noise and insulates floors to help reduce energy costs
 - Compromised of approximately 90% recycled urethane trim
 - Covers 30 sqyd



• ULTRASHIELD Comfort Gel 1/2" 8lb Carpet Cushion

- Odor guard technology helps reduce odors caused by most spills and pet accidents
- Breathable barrier allows for subfloor moisture to escape
- Helps reduce impact noise
- Made of 90% recycled material
- Covers



- **FiberTek 32 oz Carpet Pad**

- Synthetic Fiber pad
- Designed to insulate while reducing noise and sound transfer
- Ideal for commercial, hospitality, multifamily, medical, and institutional applications
- Non-allergenic/mold and mildew resistant
- 6' x 60' – covers 40 sqyd

- **Napa Pad**

- Adds protection and insulation while helping to reduce noise
- Condensed, pure urethane foam ensures durability and longlasting beauty of carpet
- Fresh Dimension antibacterial inhibits the growth of mold, mildew, and odor-causing bacteria
 - Block-Out moisture barrier repels spills
 - Bottom moisture barrier
 - 6' x 45' – covers 30 sqyd



- **EnviroStep Jade Deluxe 1/2" Carpet Pad**

- Breathable moisture barrier that allows for easy cleaning and maintenance
- Helps prevent the growth of mold and mildew under carpet
- Comprised of approximately 90% recycled urethane trim
- Covers 30 sqyd

Epoxy



- **RT-HTU High Traffic Urethane**

- A three component, high performance, abrasion resistance aliphatic coating.
- Designed for industrial maintenance applications



- **RTE-120 100% Solids Epoxy**

- 100% solids epoxy that is selfpriming
- Superior chemical and mechanical properties
- 3 gallon kit



- **RTE-LV 100% Solids Low Viscosity**

- Low Viscosity epoxy
- Ideally used for metallics
- 3 gallon kit



- **RT-PA85 Polyaspartic 85**
- Two component polyaspartic floor coating system
- Used as a base coat and a clear topcoat using a common hardener



- **RT-MVB Moisture Vapor Barrier Clear**
- Two component vapor moisture epoxy coating
 - Moisture barrier for concrete floors with high residual humidity



- **RTE-LV 100% Solids Low Viscosity**
- Low Viscosity epoxy
- Ideally used for metallics
- 3 gallon kit




• **RT-MP Metallic Pigment**


- A powdered metallic pigment which, when added to epoxy sealers and polyaspartics, gives a three dimensional look
- Available in the colors below



Torginol Polymer Flake

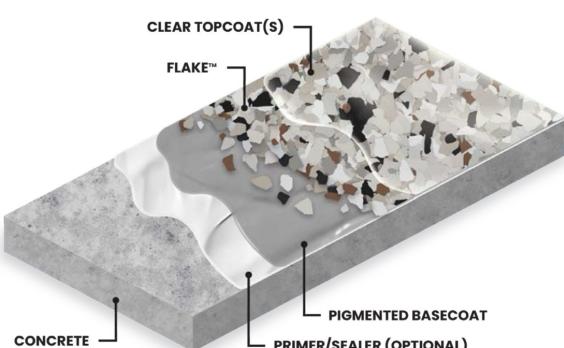

- Composed of water-based resin materials, organic materials, additives, and various pigments
- Integrally pigmented, brilliantly colored, random in shape, sized within a standardized range, and can be custom blended to achieve optimal appearance and texture qualities
- Compatible with epoxies, Methyl Methacrylates, Polyaspartics, Polyureas, and polyurethanes
- 1/4" size
- Available in the colors below

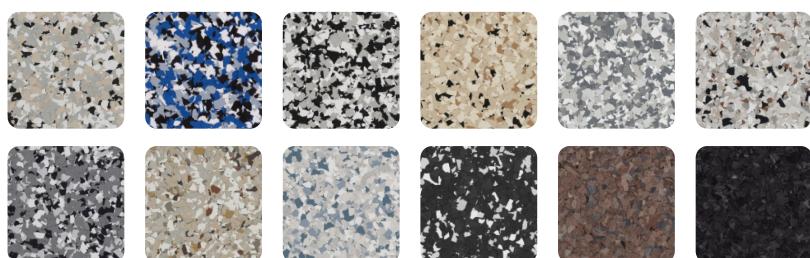



Floor Prep & Levelers



- **Novoplan HFL**

- High-flow, self-leveling, calciumaluminate-based underlayment and repair mix with high flow characteristics
- for leveling, smoothing, and repairing of interior, residential and commercial floors
- 50 lbs bag covers 24 sqft at 1/4", 12 sqft at 1/2", 9 sqft at 3/4", or 6 sqft at 1"



- **Novoplan 2 Plus**

- High-strength, self-leveling, cement based underlayment and repair mix
- For leveling, smoothing, and repairing of interior, residential and commercial floors before the installation of floor coverings
- 50 lbs bag covers 24 sqft at 1/4", 12 sqft at 1/2", 9 sqft at 3/4", or 6 sqft at 1"



- **Planipatch**

- Fast-setting, polymer modified, cement based patching compound
- For filling minor voids, holes, and cracks in concrete and approved wood underlayment
- 25 lbs bag covers 100 to 140 sqft at 1/32" or 25 to 35 at 1/8"
- 45 lbs bucket covers 180 to 251 sqft at 1/32" and 45 to 62.8 sqft at 1/8"



- **Planitex SLF**

- Fiber-reinforced, gypsum-based, selfleveling underlayment with enhanced flexural strength
- For repairing and smoothing properly primed, existing gypsum underlayment, concrete subfloors, and approved wood underlayment before installation of floor coverings
- 50 lbs bag covers 48 sqft at 1/8", 24 sqft at 1/4", 12 sqft at 1/2", 6 sqft at 1", or 3 sqft at 2"



- **Mapeicem Patch**

- High performance, fast-setting, cementitious material used for patching of concrete surfaces
- For patching interior/exterior concrete surfaces and smoothing, including elevation changes by ramping
- 10 lbs bag covers 4 to sqft at 1/4"



- **Ultraplan 1 Plus**

- Quick-setting, self-leveling, selfdrying underlayment and repair mix
- For leveling, smoothing, and repairing of interior residential or commercial floors before the installation of flooring systems or floor coverings
- 50 lbs bag covers 24 sqft at 1/4", 12 sqft at 1/2", 9 sqft at 3/4", 6 sqft at 1", or 4 sqft at 1.5"

Fortane Next



A revolutionary and versatile, high performance wood flooring adhesive, that is designed to provide industry-leading moisture vapor control, therefore eliminating the need for a roll-on moisture barrier. Fortane NEXT is suitable for solid, engineered, and parquet wood flooring as well as crumb rubber and cork underlays. Fortane NEXT combines excellent green grab and strong adhesion while providing easier board replacement without the substrate destruction typically seen with urethane adhesive installations

Product Features

- No moisture testing required when moisture control installation method is used
- Extra application of all "roll-on" moisture barriers are not needed
- Some "hollow spot areas" can be repaired, WITHOUT expensive and time-consuming drilling and injecting
- Can be used to glue down 3/4" solids (up to 18" long)
- Excellent elongation; will bridge subfloor cracks up to 1/8"
- Can be used to glue down recycled rubber and cork sound control underlayment products, up to 5 mm thick
- Environmentally friendly, contains no alcohol or solvents
- Shelf Life: Two years in unopened container
- Open Time: 40-60 minutes

Flooring Type	Trowel Size	Approximate Coverage
For Glue-Down Only Installations		
Engineered Wood		50-60 ft ² /gal. (1.2-1.5 m ² /L)
For Subfloor Moisture Vapor Protection		
Engineered Wood And 3/4" Solid-Shots up to 18" Long		30-35 ft ² /gal. (0.7-0.9 m ² /L)
For Gluing Sound Control Materials to the Subfloor		
For Gluing Sound Control Materials to the Subfloor		165-175 ft ² /gal. (4.0-4.3 m ² /L)



Fortane Universal PSA




Fortane Universal PSA is formulated for the installation of dimensionally stable LVT Tile & Vinyl Plank (including foam-backed tile and plank), carpet tile (including PVC and olefin-backed), VCT, stone composite vinyl tile, bio-based tile, recycled rubber, fiberglass-backed sheet flooring and vinyl backed resilient sheet flooring. Fortane Universal PSA is CRI Green Label Plus Certified, and is SCAQMD 1168 compliant.

Substrate/Flooring Type	Recommended Trowel Size	Approximate Coverage*
Porous substrates	1/16" x 1/16" x 1/16" (1.6 x 1.6 x 1.6 mm)	125-175 ft ² /gal. or 14-20 yd ² /gal. (12-16 m ² /3.78 L)
Non-Porous substrates	1/16" x 1/32" x 1/32" (1.6 x 0.8 x 0.8 mm)	175-250 ft ² /gal. or 19-28 yd ² /gal. (16-23 m ² /3.78 L)
Cushion-Backed or Fiber Glass-Backed Sheet Vinyl / Smooth-Backed Vinyl or Non-PVC Carpet Tile	3/8" Nap roller	250-350 ft ² /gal. or 27-38 yd ² /gal. (23-32 m ² /3.78 L)

Product Features

- Ultra-aggressive pressure sensitive adhesive
- High tack and robust adhesion
- Immediate foot traffic after PSA method installation
- Moisture tolerance on concrete up to 99% RH
- Ideal for LVT/LVP – including difficult foam back planks
- Bonds carpet tile, VCT, and vinyl sheet goods
- Low VOC
- Shelf Life: Two years in unopened container
- Open Time: up to 12 hours

Hardwood Adhesives

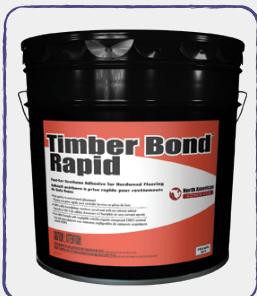

Timber Bond Rapid


Timber Bond Rapid is a rapid-setting, 100%-solids, one-component, moisture-cured urethane adhesive specifically designed for the installation of domestic solid and engineered wood flooring.

- Sets quickly to control wood placement
- 100%-solids formulation; moisture-cured and with no solvent added
- Low-odor formula with negligible volatile organic compound (VOC) content
- Covers up to 95 sqft per gallon
- Available in 4 gallon pail

Timber Bond Plus

Timber Bond Plus is a 100%-solids, one-component, moisture-cured urethane adhesive specifically designed for the installation of domestic and exotic solid and engineered wood flooring, including bamboo.

- Durable bond strength for exotic and domestic wood species
- Low-odor formula with negligible volatile organic compound (VOC) content
- Easy to trowel with excellent trowel-ridge holdout for proper adhesive bonding
- Can be used with ceramic tile and stone for mixed-media installations with wood flooring
- Covers up to 185 sqft per gallon
- Available in 4 gallon pail

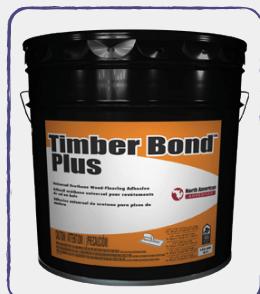

Fortane NEXT

Fortane NEXT is a versatile high performance wood flooring adhesive that is specifically designed to provide industry-leading moisture vapor control, therefore eliminating the need for a roll-on moisture barrier. Fortane NEXT can be used for most all your "everyday" adhesive installations and is suitable for solid, engineered and parquet wood flooring as well as crumb rubber and cork underlays.

- Some "hollow spot areas" can be repaired, WITHOUT expensive and timeconsuming drilling and injecting process
- Installer friendly, easy to trowel and clean up, even after the adhesive is dried and completely cured
- Easier board replacement, compared to urethane adhesives



Machinery



VFG-Z30 HEPA Concrete Dust Extractor

- Unique jet pulse filter cleaning technology ensures efficient and clean filtration
- OSHA compliant H13 HEPA filter tested and certified with EN1822-1 and IEST RP CC001.6
- Single Phase 220V, 60Hz, 3.6kw, 270cfm at 2" air intake/ 330CFM at 3" air intake Max Vacuum:90" H2O WITH longopac disposable bags



PG-2829 Vantage 20" 2 Head Floor Grinder

- Machine for surface prep, grinding, and polishing concrete floors
- 20" 2 head grinder with variable speed control and forward and reverse head rotation
 - Uses 6 diamonds or polishing pads
- 220V Single Phase 5-1/2HP Variable RPM 0-1800



VFG-Z20 HEPA Concrete Dust Extractor

- Unique jet pulse cleaning system, efficiently purges the pre-filter without opening the vacuum to maintain smooth airflow and avoid creating a second dust hazard
- OSHA compliant H13 HEPA filter tested and certified with EN1822-1 and IEST RP CC001.6
- Single Phase 110V, 60Hz, 2.4kw, 224cfm at 2" air intake/ 247CFM at 3" air intake Max Vacuum:86" H2O

Mapecem



Mapecem Quickpatch is a high-performance, fast-setting, cementitious material used for the patching of concrete surfaces. This product features a very low emission of volatile organic compounds and includes an offset of greenhouse gas emissions.

Product Features

- Natural gray to blend with existing concrete
- Mapecem Quickpatch can be applied from 1/16" to 1-1/2" (1.5 mm to 3.8 cm) neat and from 1-1/2" to 3" (3.8 to 7.5 cm) neat in areas no larger than 24 sq. ft. (2.23 m²). Larger areas will require Mapecem Quickpatch to be extended.
- Mapecem Quickpatch can be primed and covered with a leveler, a cement-based overlay or a tile-setting mortar in as little as 90 minutes, depending on temperatures.
- Moisture-controlling adhesives or moisture mitigation systems can be used over Mapecem Quickpatch in as little as 16 hours.
- Open Time: 20 minutes


Parabond



M-250 Premium Grade Brush Grade Contact

M-250 is an extremely flammable brush/roller coat neoprene contact adhesive developed for multiple uses.

- Covers 120-140 sqft per gallon
- Available in 1 quart, 1 gallon, and 5 gallon

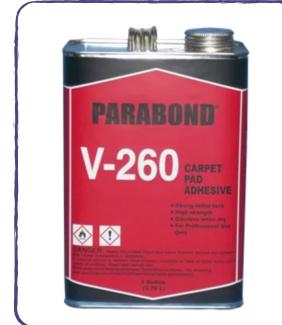

V-260 Carpet Pad Adhesive

V-260 Carpet Pad Adhesive is an Extremely Flammable solvent based pad adhesive that is VOC Compliant and is recommended for permanently fastening carpet padding over any approved flooring surface.

- Good initial tack
- High strength
- Open Time: 2 hours
- Available in 1 gallon metal pail



M-163 Carpet Seam Adhesive

Parabond M-163 is an extremely flammable adhesive used in seaming all types of carpet in direct glue down installations, excluding PVC vinyl backs.

- Also used for double stick applications and direct glue installations
- Covers up to 340 lft when using a 1/8" bead
- Available in 32 oz bottle



M-260 Carpet Pad Adhesive

Parabond M-260 Carpet Pad Adhesive is an Extremely Flammable solvent based pad adhesive that is recommended for permanently fastening carpet padding over any approved flooring surface.

- Good initial tack
- High strength to reduce pad movement
- Open Time: 2 hours
- Available in 1 gallon jug

Plywood

Birch Plywood


- Import Indonesian Birch
- 4 x 8 sheets
- Available in 3/4", 1/2", and 1/4 thicknesses
- Cabinet grade
- UV clear finish available in 3/4" and 1/2"
- Columbia thick-skinned Birch plywood available in 1/2" thickness



Lauan Underlayment


- 4 x 8 sheets
- Available in 1/4" thickness
- Water-resistant glue used to stick together, making it ideal for underlayment use

Primed Trim

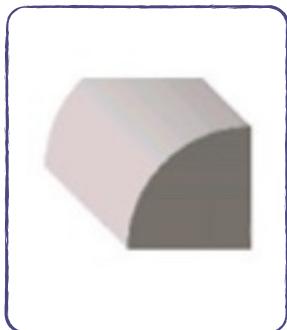


Primed Quarter Round

11/16" x 11/16" x 1', 12', 16'

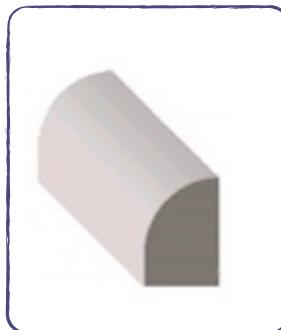

Primed Shoe Mold

7/16" x 11/16" x 8', 12', 16'

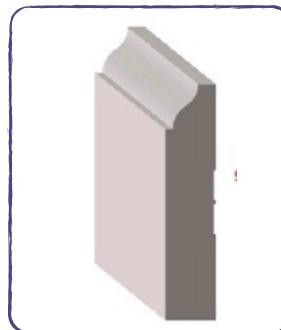


Primed Baseboard

9/16" x 3-1/4" x 16'



Primed 1 x 4, 1 x 6, 1 x 8, 1 x 12

FJ Pine & MDF

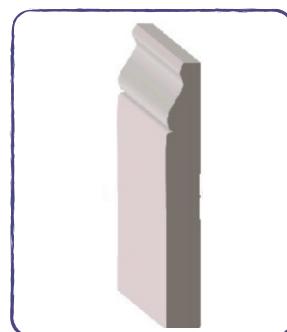

Primed Baseboard


9/16" x 5-1/4" x 16'

Shower Systems




• PROVA-FLEX Tile Underlayment

- Durable, lightweight tile underlayment that provides crack isolation protection
- Consists of 3 layers: a top layer of woven polypropylene mesh, a central sheet of polypropylene, and a bottom layer of non-woven polypropylene
- 3.28' x 82.02' - covers 269 sqf

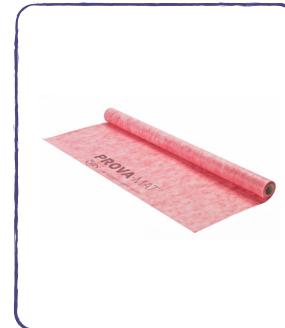

• PROVA-MAT Waterproofing Membrane

- Polypropylene low perm waterproof membrane that is ideal for showers, bathrooms, backsplashes, and more
- Easy-to-install membrane that resists mold and mildew growth and provides great resistance to water vapor transmission
- 3.28' x 16', 33', 82' - covers 54 sqft, 108 sqft, or 269 sqft

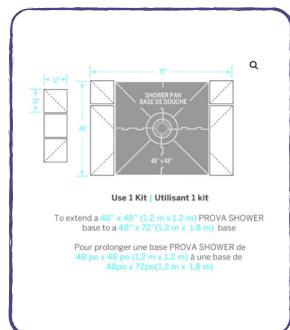

• PROVA Linear Pan Extension

- 4 piece extension kit, constructed from lightweight expanded polystyrene, that can be used to expand a shower base to desired size
- Extensions have an outside thickness of 1-5/8" and are 24" x 24"



• Prova Shower System


- Contains all components required to build a fully bonded, water-tight shower assembly
- Protects wall cavities against water and vapor penetration
- ABS Drain
- Available in 48" x 48" and 32" x 60" with a center and an offset drain

Stair Balusters




5015

1-1/4" 31", 34", 36", 39", 41"

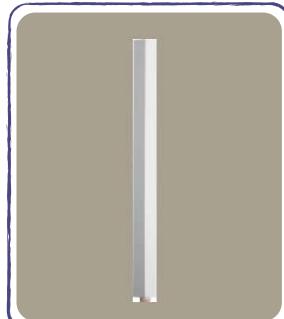

5060

1-1/4" 36", 42"

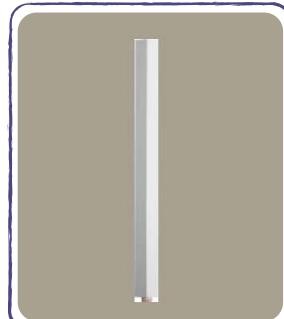

5360

1-3/4" 42"



Hollow Metal Balusters
Satin Black

1/2" x 44"



5067

1-1/4" 34", 36", 39", 41"

Staples Special



Tego T07-0A11D 3/8" Pro Pad Staples

3/8" Length x 13/32" Crown 20 Ga. professional quality carpet pad staples for use with A11-series compatible hammer tackers.

- Made of high carbon steel for optimal tensile strength
- Point Type: Divergent Point
- Quantity/Box: 5,000
- Boxes/Case: 20
- \$4.00 a box when you buy a case



Tego T07-5418D 9/16" Pro Pad Staples

9/16" Length x 3/16" Crown 20 Ga. professional quality electric tacker staples.

- Made of high carbon steel for optimal tensile strength
- Point Type: Divergent Point
- Quantity/Box: 5,000
- Boxes/Case: 20
- \$4.00 a box when you buy a case



Pro Drive #5418D 3/16" Carpet Pad Staples

These 5400 9/16" Length x 3/16" Crown 20 Ga. series carpet staples are excellent for upholstery, picture frames, carpeting, moldings, trim and much more.

- Point Type: Divergent Point
- Quantity/Box: 5,000
- Boxes/Case: 20
- \$4.00 a box when you buy a case

Tile & Stone



Keraflex SG

- Standard-grade, versatile, large-and-heavy-tile mortar and thin-set mortar for tile and stone installations on floors, walls and countertops
- Easy mixing, handling and troweling properties
- For use over plywood and a variety of membranes
- Covers up to 86 sqft
- Available in 44 lbs bag in both gray and white



Ultraflex 1

- Standard-grade, singlecomponent, polymer-modified thin-set mortar for most interior and exterior installations of tile
- Polymer-enriched for performance
- Good bond strength with plywood
- Covers up to 90 sqft
- Available in 50 lbs bag in both gray and white



Type 1

- Premium-grade, traditional, nonflammable, acrylic adhesive for setting glazed and unglazed ceramic and porcelain tiles on walls, floors and countertops
- For the installation of tile on walls in intermittent wet conditions such as tub and shower surrounds
- Low in odor
- Smooth and easy to spread
- Extended open time
- Available in 1 quart pail, 1 gallon pail, and 3.5 gallon pail



Ultraflex 2

- Professional-grade, singlecomponent, high-performance, polymer-modified thin-set mortar for interior and exterior installations of ceramic, porcelain and dimensional natural-stone tile
- Polymer-enriched for high performance and deformability
- Smooth and creamy consistency for easy application
- Covers up to 90 sqft
- Available in 50 lbs bag in both gray and white



Reinforcing Fabric

- strong, absorbent, flexible, alkaliresistant, polyester reinforcing fabric installed under ceramic tile or stone on residential and commercial interior applications
- Reduces total installation time by quickly absorbing Mapelastic AquaDefense, Mapelastic WaterStop and Mapelastic Turbo
- Durable and flexible; lays flat, making it easy to install
- Covers 237.5 sqft per roll



4 to 1 Mud Bed Mix

- 4 to 1 is a pre-blended mixture of finely graded sand and Portland cement used for thick-bed mortar installations
- Screed and level from 3/8" to 3"
- Ideal for floating shower bases
- Covers up to 6 sqft
- Available in 55 lbs bag

Flexcolor CQ

- Professional-grade, ready-to-use specialty grout for precision commercial and residential installations with porcelain, ceramic and natural-stone tiles
- Easy cleanability, color consistency, and improved workability
- Dries to a hard, uniform color surface in 24 hours and will not stain surfaces
- Available in 1 gallon and 2 gallon pails



Ultracolor Plus FA

- Ultra premium, fine-aggregate, fast-setting, polymer-modified, color-consistent, nonshrinking, efflorescence-free grout for joint widths from 1/16" to 3/4"
- Fine aggregate allows for narrow joint widths and improved clean ability
- Easy to install and stain-resistant
- Sealer not typically required
- Available in 25 lbs bags

Durock Liquid Waterproofing and Crack Isolation Membrane

Crack Isolation Membrane • Liquid-applied waterproofing and crack isolation membrane and vapor retarder ideal for waterproofing showers and other wet areas

- Anti-fracture protection up to 1/8 in. (3mm) over shrinkage and other non-structural cracks
- Can be rolled, brushed, troweled, and sprayed
- Fast drying time allows for quick turn around time
- Bonds directly to stainless steel, PVC, and ABS drains
- Suitable for waterproofing floors, walls and countertops
- Available in 1 gallon pail and 3.5 gallon pail



Fiberglass Backerboard

- Unique, fiber-reinforced gypsum product that includes a water-resistant core for supreme durability and superior performance in wet and dry environments
- Made from 97% recycled material
- Uniform composition provides both strength and water resistance
- Use in both wet and dry areas throughout the home
- Ideal under tile, stone, vinyl, hardwood flooring, laminate flooring, carpeting and countertops
- Superior tile bond—three times industry standard
- Available in 1/4" and 1/2" thicknesses



Underlayment

• SoundWise PP 3020

- Premium foam underlayment that can be used under laminate, solid hardwood, engineered wood, and bamboo floating floors
- Provides moisture protection and sound control
- 42" x 28.6' - covers 100.1 sqft




• Black Jack floating floor cushion underlayment

- For use under floated laminate, bamboo and engineered floors
- Made of dense, closed cell foam, which offers moisture, mold, and mildew resistance
- 43" x 28' - covers 100 sqft



• SoundWise PP 2020

- Better economy grade foam underlayment effective for sound and moisture control
- Approved for use under laminate, solid hardwood, engineered wood, and bamboo floating floors
- High grade polypropylene, 42" x 28.6' - covers 100.1 sqft

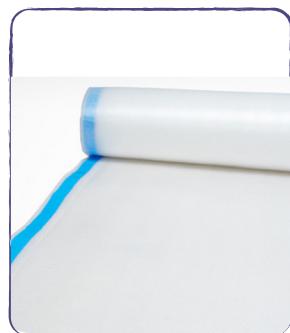

• Roberts 70-115 Moisture Barricade

- Designed for use with laminate, SPC, and engineered flooring underlayment to protect finished floors against moisture damage
- 6 mil thick polyethylene film, 10' X 12' - covers 120 sqft per roll



For all your flooring needs!

We also offer unfinished flooring and trim in both primed and clear options for all needs

<p>Parabond THE ONLY WORD FOR ADHESIVES</p> <p>Flooring installation adhesives</p>	<p>Pro-Drive FASTENERS Pro-Driven Industrial Products and Solutions</p> <p>Flooring tools and staples</p>	<p>TRAXX CORPORATION</p> <p>Seam tape, tack strips, Flooring underlayment</p>	<p>md PRO</p> <p>Metal trim for Flooring, carpet, and commercial applications</p>
<p>O CREATE FLOORING BY MUCHSEE®</p> <p>LVP, laminate, Finished hardwood, etc</p>	<p>RESIN TEK SYSTEMS</p> <p>Epoxy materials and products</p>	<p>MAPEI</p> <p>Grout, mortars, self levelers, adhesives, primers, and patches</p>	<p>CRAIN</p> <p>Installation tools and supplies for Flooring</p>
<p>DEP</p> <p>Flooring tools and installation supplies</p>	<p>Fortane™ Wood Flooring Adhesive Systems</p> <p>Flooring installation adhesives</p>	<p>GUNDLACH</p> <p>Installation tools and supplies for Flooring</p>	<p>Advanced Adhesive Technologies</p> <p>Flooring installation adhesives</p>
<p>ROBERTS</p> <p>Flooring installation adhesives</p>	<p>POWERNAIL®</p> <p>Flooring installation power tools</p>	<p>Leggett & Platt®</p> <p>Carpet padding</p>	<p>CARPENTER</p> <p>Carpet padding</p>



Contact

(256) 233-7850 - (615) 915-3821

28260 McKee Road Toney, AL 35773

200 Fesslers Lane Nashville, TN 37210

