


DC FAST CHARGERS

60KW / 80KW / 120KW / 160KW DC Chargers available with OCPP and CCS

arbarr[™]
ENERGY STORAGE SYSTEMS

Arbarr DC Fast Charger - Encompasses Future EV Charging Technologies

- ✓ Fast EV Charger is a three-phase without battery, commercial standard DC charging unit.
- ✓ Dual charging is constant and proportional when 2 cars are charging simultaneously.
- ✓ Easy to Install, Stable in performance, and provides complete protection function.
- ✓ OCPP and CCS 2.
- ✓ Able to monitor the charging status through LCD display.




- ✓ Optimise number of chargers in limited space.
- ✓ Avoid expensive installation and service costs.
- ✓ Customised payment solutions to improve end user experience.
- ✓ Local support and maintenance provision.
- ✓ Stock available to meet customer deliveries in a reasonable time frame.
- ✓ Customised enclosures to match current environment.
- ✓ Own brand options available.

CONTACT US



Arbarr Electronics Ltd
Unit 3
Aghanloo Industrial Estate
Limavady
BT49 0HE
Northern Ireland
enquiries@arbarr.co.uk



Input & Output - Input from 50kW upwards - Output as below or option to customise

Input amps	186A Three Phase
Input voltage	340~415V AC
Input frequency	50/60HZ
DC outlet type	CCS2/CHAdeMO
Output voltage	200-750V DC
Max. output power	60/80/120/160kW
Max. output current	2 x 200A DC
Voltage accuracy	<±0.5%
Current accuracy	≥30A ≤±1% ; <30A: ≤ ±0.3A
Ripple coefficient	RMS: ±0.5%;Peak: ≤±1%
Meeting accuracy	0.5%
Efficiency	≥94%
Cable Length	5m

Protection

Over voltage protection	✓
Under voltage protection	✓
Over load protection	✓
Short circuit protection	✓
Earth leakage protection	✓
Over-temp protection	✓
Surge protection	✓

Function & Accessory

Display	7 inch screen
Ethernet/WIFI/4G	Yes/Opt/Opt
RCBO	Type A +6mA DC fault current protection (Equivalent to Type B)
LED Indicator light	✓
Emergency stop button	✓
Intelligent power adjustment	Opt.
RFID	✓

Working Environment

Protection degree	IP54/IP65/IP67
Environment temperature	-30°C~+50°C
Relative humidity	5%-95% non-condensing
Cooling	Air & liquid cooling
Standby power consumption	< 30W
Noise emission	≤55db
IK Rating	IK10

Mechanical

Dimension (W/H/D)	860*860*1800MM
Weight	200/215/260/280KG

Mounting & Accessories

Floor-mounting	Standard
Recommended base size	TBC/TBC/TBCmm

Certifications

CE	✓
EN 61000-6-2; EN 61000-6-4 IEC 62196, IEC 61851, JEVS G105	✓




Up to 160 kW charging capacity per dispenser

Low-noise charging

Liquid-cooled charging cable

Suitable for plug types CCS2/CHAdeMO

Integrated 7-inch touch-screen

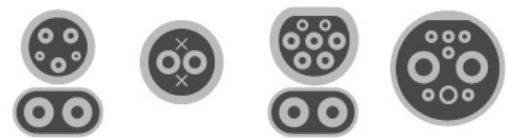

ARBARR ELECTRONICS LTD

UNIT 3
AGHANLOO IND. ESTATE
LIMAVADY, BT49 0HE

www.arbarr.com

✉ enquiries@arbarr.co.uk

☎ +44 (0) 28 7776 6611

