



Flooring & Specialty Adhesives
For Professionals Since 1938



2020



In 1938, the carpet industry had just begun to use liquid latex for carpet seaming and repair. The newly formed ROBERTS Company developed a new latex formula of its own and labeled it Rubber-edge, laying the groundwork for today's thriving Adhesives Division of Roberts Consolidated Industries, Inc.

ROBERTS continued with innovations in the industry and pioneered the Double Bond Carpet Installation method which is now a recognized standard that has stood the test of time. ROBERTS has been a leader in the manufacturing of adhesives ever since, producing its first solvent-free adhesive in the 1980's and continuing to develop environmentally friendly products.

With locations and product lines known and used throughout the world, ROBERTS has been recognized as the premier brand of adhesives, carpet installation tools and accessories. Worldwide, the ROBERTS name continues to be the manufacturer of choice for installation professionals who demand quality and reliability.

Supporting Professional Installers
- Since 1938 -

CONTENTS

Multipurpose Adhesives	3
Carpet Adhesives	5
Resilient Adhesives	8
Wood Adhesives	12
Specialty Adhesives	15
Construction Adhesives	18
Adhesive Cleaners	19
Adhesive Reference Chart	20
Trowel Chart	21

ADHESIVE SOLUTIONS



ROBERTS® Moisture Control Adhesives

Enhanced, superior-grade adhesives made to withstand up to 10 lbs. moisture vapor emission rates (MVER) and up to 90% relative humidity (RH), over newly poured concrete with declining values. This improvement simplifies the moisture mitigation process:

SAVE TIME. SAVE STEPS. SAVE MONEY.



UP TO 8 LBS.



UP TO 10 LBS.

ROBERTS takes its environmental responsibilities seriously and actively participates with governing agencies and organizations to establish the highest standards for environmentally conscientious products. ROBERTS continues to minimize the environmental impact of our products by ongoing improvement of product technologies, manufacturing and distribution methods.



GoldGuard® Antimicrobial Technology

The ROBERTS two-tier antimicrobial protection system for both the wet and dry state inhibits the growth of mold, mildew and odor causing bacteria.



CRI Green Label +Plus®

These adhesives have been rigorously tested and meet the most stringent criteria for low chemical emissions and are among the lowest emitting VOC products in the market.



LEED® v4 Qualified Adhesives

Many of our adhesives contribute one or more points in the LEED rating system. The U.S. Green Building Council's LEED Green Building Program is the preeminent program for the design, construction, maintenance and operations of high-performance green buildings. Learn more at usgbc.org/LEED.



ROBERTS Enviro Friendly

The Green "e" Logo on a product, indicates an environmentally conscious product manufactured by a company that is committed to protect and sustain our environment.

INDUSTRY PARTNERSHIPS





Multipurpose Adhesives

3300 Multipurpose Adhesive

SUPERIOR

- MOISTURE CONTROL – Up to 8 lbs. MVER / 85% RH
- NFPA Class A / UBC Class 1 Fire Ratings
- Aggressive grab for reduced bubbling and curling
- Excellent rebond properties
- Ideal for direct and double bond installations
- Traffic - Heavy commercial



TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3300-4	4 Gallon	1

ROBERTS 3300 is a superior performing, high solids multipurpose adhesive formulated for the installation of hard-to-bond commercial carpet. Plus most types of felt-backed, fiber-backed and paper-backed resilient floor coverings. VOC: < 1 g/L.

Open Time: Up to 30 min. **Working Time:** Up to 60 min.




3085 Multipurpose Adhesive

PREFERRED

- NFPA Class A / UBC Class 1 Fire Ratings
- Great adjustability time with a strong bond when cured
- Excellent for pattern carpets
- Traffic - Heavy residential / Moderate commercial

TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3085-4	4 Gallon	1
3085-1	1 Gallon	4
3085-0	1 Quart	6

ROBERTS 3085 is a high performance commercial-grade adhesive developed for the direct glue installation of most commercial carpets. It offers great adjustability time and once dry, a very strong bond to hold pattern carpets in place. VOC: < 1 g/L.

Open Time: Up to 40 min. **Working Time:** Up to 70 min.



3080 Multipurpose Adhesive

PREFERRED

- NFPA Class A / UBC Class 1 Fire Ratings
- Quick leg development
- Strong bond strength
- High tack and fast setting
- Traffic - Heavy residential / Moderate commercial

ROBERTS 3080 is a fast setting, mid-range adhesive that offers a reduced open time and quick leg development. It is the perfect adhesive for jobs that require quick installation times. VOC: 10 g/L.

Open Time: Up to 30 min. **Working Time:** Up to 50 min.

TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
R3080-4	4 Gallon	1



3000 Multipurpose Adhesive

PRIMARY

- NFPA Class A / UBC Class 1 Fire Ratings
- Optimal open time for positioning for felt-backed sheet vinyl
- Exhibits good tack for most types of carpet
- Traffic - Moderate residential / Light commercial

ROBERTS 3000 is a contract-grade adhesive formulated for the installation of most types of commercial carpet and felt-backed sheet vinyl. Formulated with a longer open time for optimal positioning of felt-backed vinyl flooring, plus develops tack for the installation of rigid-backed carpets. VOC: < 1 g/L.

Open Time: Up to 60 min. **Working Time:** Up to 90 min.

TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3000-5	5 Gallon	1
3000-4	4 Gallon	1
3000-1	1 Gallon	4



3050 Multipurpose Adhesive

PRIMARY

- NFPA Class A / UBC Class 1 Fire Ratings
- Fast tacking, contract-grade formula
- Low odor and VOC compliant
- Traffic - Moderate residential / Light commercial

ROBERTS 3050 is an economical, low VOC adhesive developed for the installation of carpet and felt-backed sheet vinyl. ROBERTS 3050 is a fast tacking, efficient adhesive. VOC: < 1 g/L.

Open Time: Up to 45 min. **Working Time:** Up to 90 min.

TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3050-4	4 Gallon	1





Carpet Adhesives

3095 Carpet Adhesive

SUPERIOR

- MOISTURE CONTROL – Up to 10 lbs. MVER / 90% RH
- High tack and fast grab
- Direct and double bond installations
- Traffic - Heavy commercial

ROBERTS 3095 is a commercial-grade carpet adhesive developed for the most demanding carpet installations, including broadloom carpet. ROBERTS 3095 is an excellent adhesive for direct or double bond/stick installation methods. VOC: < 1 g/L.

Open Time: Up to 20 min. **Working Time:** Up to 40 min.



TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3095-4	4 Gallon	1
3095-1	1 Gallon	4



3900 Carpet Adhesive

PREFERRED

- Great up front tack and strong bond
- Holds stiff, rigid carpet backings
- Traffic - Heavy residential / Moderate commercial

ROBERTS 3900 is a high performing direct glue down carpet adhesive recommended for light to heavy traffic. It is a rapid grabbing adhesive to assist in holding stiff carpets in place during installation and is specifically designed with the desired characteristics for commercial carpet installations. VOC: < 1 g/L.

Open Time: Up to 25 min. **Working Time:** Up to 45 min.



TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3900-4	4 Gallon	1



3500 Carpet Adhesive

PRIMARY

- Extended open time for pattern matching and/or re-positioning
- Excellent choice for dry climates
- Traffic - Moderate residential / Light commercial

ROBERTS 3500 is a direct glue down carpet adhesive recommended for residential to light commercial traffic. Its extended open time allows plenty of time to install carpet and is also great for dry, non-humid regions where a longer open time is necessary. VOC: < 1g/L.

Open Time: Up to 50 min. **Working Time:** Up to 80 min.



TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3500-4	4 Gallon	1




6300 Pressure Sensitive Adhesive

SUPERIOR

- MOISTURE CONTROL – Up to 10 lbs. MVER / 90% RH
- Releasable or permanent installations
- High shear strength and exceptional plasticizer migration resistance
- Traffic - Heavy commercial



TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
R6300-4	4 Gallon	1
R6300-1	1 Gallon	4

ROBERTS 6300 is a high performance pressure sensitive adhesive which may be used to install carpet tiles, commercial carpet cushion, fiberglass reinforced sheet vinyl, luxury vinyl tiles and heterogeneous sheet vinyl and tile. This product dries quickly and offers a high shear strength making it the adhesive of choice for commercial installations where performance is key. VOC: 10 g/L.

PERMANENT (Wet-set Method)

Open Time: Up to 20 min. Working Time: Up to 40 min.

RELEASABLE (Tack-set Method)

Open Time: Up to 45 min. Working Time: 12-14 hours



6280 Pressure Sensitive Adhesive

PREFERRED

- Permanent or releasable installations
- Good plasticizer migration resistance
- Works with a variety of flooring types
- Traffic - Heavy residential / Moderate commercial

ROBERTS 6280 is an acrylic pressure sensitive adhesive with good plasticizer migration resistance. It may be used as a releasable/repositionable adhesive or as a permanent installation, if flooring is installed while adhesive is still wet. VOC: < 1 g/L.

PERMANENT (Wet-set Method)


Open Time: Up to 20 min. Working Time: Up to 60 min.

RELEASABLE (Tack-set Method)

Open Time: Up to 60 min. Working Time: Up to 24 hours



TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
R6280-4	4 Gallon	1
R6280-1	1 Gallon	4
R6280-0	1 Quart	6



OUTDOOR CARPET ADHESIVE

6700 Indoor/Outdoor Carpet Adhesive

SUPERIOR


- Solvent-free, non-flammable, low VOC
- Excellent moisture resistance when cured
- Ideal for decks, sunrooms and basements

ROBERTS 6700 is a solvent-free adhesive designed for the exterior or interior installation of indoor/outdoor carpet. This adhesive is ideal for interior patios or sunrooms, as well as basements. VOC: < 1 g/L.

Open Time: Up to 30 min. Working Time: Up to 60 min.



TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
6700-4	4 Gallon	1
6700-1	1 Gallon	4
6700-0	1 Quart	6



CARPET ACCESSORY ADHESIVES

4002 Latex Carpet Pad Adhesive

PREFERRED

- Prevents pad movement for trouble-free installations
- Permanent bond to porous and non-porous substrates
- Fast grabbing and quick drying

ROBERTS 4002 is a solvent-free, latex-based, enviro-friendly carpet pad adhesive, developed to quickly bond carpet pads to subfloors in stretch-in carpet installations. It provides a permanent bond to porous and non-porous substrates. VOC: < 1 g/L.

Coverage: Up to 700 lineal feet per gallon, depending on application method

Open Time: Up to 15 min. **Working Time:** Up to 45 min.



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
4002-1	1 Gallon	4

8015 Universal Carpet Seam Sealer

SUPERIOR

- Fast drying, solvent-free formula
- UV tracers for detection with UV light sources
- Suitable for all types of carpet, including vinyl-backed carpets
- Can be used on both direct- and double-bond applications as a seam adhesive

ROBERTS 8015 is a solvent-free universal carpet sealer developed for seaming most types of carpets to include vinyl-backed and to prevent edge raveling. May also be used to repair bubbles in existing installations. VOC: < 1 g/L.

Coverage: Up to 660 lineal feet per quart **Open Time:** Up to 10 min.



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
8015-0	1 Quart	6
8015-A	8 Ounces	12

8502 Latex Carpet Seam Sealer

PREFERRED

- Binds/seals carpet edges to prevent raveling
- UV tracers for easy detection
- Use to apply new backings to area rugs
- Provides enhanced slip resistance

ROBERTS 8502 is a natural latex adhesive recommended for seam sealing carpets, sealing raw edges, binding, strengthening worn backings and applying new backings on area rugs. ROBERTS 8502 may also increase slip resistance on mats or rugs and contains a UV tracer for easy detection. VOC: < 1 g/L.

Coverage: Up to 725 lineal feet per quart **Open Time:** Up to 10 min.



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
8502-1	1 Gallon	4
8502-0	1 Quart	12

1000 Seam Adhesive Dispenser

- Designed to apply seam sealer to the seams of carpet and vinyl flooring
- Use with the "stepped" applicator tip for best results
- Holds up to 8 ounces

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
1000-8	Holds 8 Ounces	12





Resilient Adhesives

2350 HARD-SET Resilient Flooring Adhesive

SUPERIOR

- MOISTURE CONTROL – Up to 8 lbs. MVER / 85% RH
- Tenacious up front tack; cures to permanent hard-set bond
- Resists indentations from heavy rolling loads
- Excellent trowelability and flexibility for multiple flooring types
- Traffic - Heavy commercial



TROWELS

1/16" x 1/16" x 1/16"

1/16" x 1/32" x 1/32"

3/32" x 3/32" x 3/32"

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
2350-4	4 Gallon	1

ROBERTS 2350 HARD-SET is an exceptional performing acrylic formula, specifically designed to offer tenacious up-front pressure sensitive performance and cures to a permanent hard-setting bond. Excellent for use on installations requiring resistance to indentations from heavy point and rolling loads. VOC: < 1 g/L.

Open Time: Up to 15 min. **Working Time:** Up to 60 min.



7350 UNIVERSAL Flooring Adhesive

SUPERIOR

- MOISTURE CONTROL – Up to 10 lbs. MVER / 90% RH
- Ideal for LVT, LVP, SPC/WPC, and Solid Vinyl Tile
- Rebondable pressure sensitive, aggressive bond, permanent tack
- Excellent resistance to plasticizer migration



TROWELS

1/16" x 1/16" x 1/16"

1/16" x 1/16" x 3/32"

1/16" x 1/32" x 1/32"

Medium Nap Roller

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
7350-4	4 Gallon	1
7350-1	1 Gallon	4
7350-0	1 Quart	6

ROBERTS 7350 is a high quality, high solids, cross-linking formulation designed specifically for installing luxury/solid vinyl tiles and planks. This powerhouse adhesive is ideal for use with large format vinyl tiles. Can also be used to adhere carpet tiles and specialty vinyl flooring underlayment to the subfloor. VOC: 11 g/L.

PERMANENT (Wet-set Method)

Open Time: Up to 20 min. **Working Time:** Up to 40 min.

RELEASABLE (Tack-set Method)

Open Time: Up to 45 min. **Working Time:** 12-14 hours



RUBBER-BOND

5350 Rubber Flooring Adhesive

SUPERIOR

- MOISTURE CONTROL – Up to 10 lbs. MVER / 90% RH
- Exceptional and permanent bond strength
- Quick and easy trowelability
- Resistant to indentations and accepts heavy rolling loads
- Traffic - Heavy commercial



TROWELS

1/16" x 1/16" x 1/16"

3/32" x 3/32" x 3/32"

1/16" x 1/32" x 5/64"

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
5350-4	4 Gallon	1

ROBERTS 5350 RUBBER-BOND is uniquely designed with superior bonding properties required for rubber sheet and tile flooring. ROBERTS 5350 flashes quickly to a tacky state, provides a robust initial grab, resistant to indentations and accepts heavy rolling loads. VOC: 13 g/L

Open Time: Up to 20 mins. **Working Time:** Up to 70 mins.



QUICKBOND

7000 Spray Adhesive For Resilient Flooring

SUPERIOR

- MOISTURE CONTROL – Up to 10 lbs. MVER / 90% RH
- Quick, easy stand and spray installation
- Pressure sensitive aggressive tack and high shear strength
- Fully recyclable aluminum can



ROBERTS 7000 is a premium, high solids adhesive designed to be a quick, easy, one-step installation process for luxury vinyl tile, luxury vinyl plank, vinyl composition tile, vinyl-backed carpet tile, and fiberglass-backed tile in residential and commercial applications. Spray installation method uses less adhesive than typical trowel applications and allows for immediate foot traffic. Can also be used in a double bond installation to install cushioned underlaments for resilient flooring applications. VOC: < 1 g/L.

⚠️WARNING: Cancer - www.P65Warnings.ca.gov. See P. 21, *Prop 65 - 1.

Working Time: Up to 3 hr. **Tack Time:** Up 20-30 min.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
7000-22	22 Ounces	12



7500 Vinyl Seam Sealer For Sheet Flooring

SUPERIOR

- Designed to economically seal seams in sheet flooring
- Develops a durable bond and can be walked on within 2 hours
- Delivers a clean, continuous seam; reducing dirt collection
- Easy installation and easy clean-up

ROBERTS 7500 Vinyl Seam Sealer is a strong adhesive designed to economically seal seams of both residential and commercial vinyl sheet flooring. VOC: 23 g/L.

Coverage: Up to 144 lineal feet per 8 ounces

Working Time: Up to 15 min.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
7500-8	8 Ounces	6



2310 Resilient Flooring Adhesive

SUPERIOR

- Ideal for fiberglass-backed sheet vinyl and luxury vinyl tile
- Permanent or releasable installations
- Pressure sensitive; remains tacky
- Traffic - Residential / Light commercial

ROBERTS 2310 is formulated with the desired tack and flexible working time for fiberglass-backed sheet vinyl and luxury vinyl tile; heterogeneous sheet vinyl and modular carpet. VOC: < 1 g/L.

PERMANENT (Wet-set Method)

Open Time: Up to 25 min. **Working Time:** Up to 45 min.

RELEASABLE (Tack-set Method)

Open Time: Up to 50 min. **Working Time:** Up to 24 hours

TROWELS

1/16" x 1/16" x 3/32"

1/16" x 1/16" x 1/16"

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
2310-4	4 Gallon	1
2310-1	1 Gallon	4



2001 Felt-Backed Sheet Vinyl Adhesive

SUPERIOR

- Developed specifically for felt-backed sheet vinyl
- Optimal working time for positioning
- Traffic - Residential / Moderate commercial

ROBERTS 2001 is a superior, commercial-grade, felt-backed sheet vinyl adhesive. This adhesive was developed with the optimum open time and working time for the positioning of felt-backed sheet vinyl flooring. VOC: < 1 g/L.

Open Time: Up to 25 min. **Working Time:** Up to 45 min.

TROWELS

1/16" x 1/16" x 3/32"

1/16" x 1/16" x 1/16"

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
2001-4	4 Gallon	1
2001-1	1 Gallon	4
2001-0	1 Quart	6



2057 VCT Adhesive

SUPERIOR

- MOISTURE CONTROL – Up to 8 lbs. MVER / 85% RH
- Dries clear for visible chalk lines
- Good residual tack
- Extended working time
- Traffic - Heavy residential / Moderate commercial



TROWELS

1/16" x 1/16" x 3/32"

1/16" x 1/16" x 1/16"

1/16" x 1/32" x 1/32"

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
2057-4	4 Gallon	1
2057-1	1 Gallon	4
2057-0	1 Quart	6

ROBERTS 2057 is a clear thin spread adhesive designed for the installation of vinyl composition tile (VCT) in commercial applications. VOC: < 1 g/L.

Open Time: Up to 60 min. **Working Time:** 8-12 hrs.






Wall Base Adhesives

7200 Wall Base Adhesive

SUPERIOR

- Excellent holding power and great wet suction
- Strong initial grab for holding heavy rubber wall base
- Fast set-up and non-staining formula
- Easy application and cleanup
- Use for vinyl, rubber and carpet wall base

TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
7200-4	4 Gallon	1
7200-1	1 Gallon	4
7200-30C	30 Ounces	12
7200-11C	11 Ounces	12

ROBERTS 7200 is a superior performing wall base adhesive with exceptional wet grab and rapid set-up for the fast installation of wall base. VOC: < 1 g/L.

Open Time: Up to 10 min. **Working Time:** Up to 30 min.





Wood Adhesives

LOCKDOWN

1660 Pressure Sensitive Flooring Adhesive

SUPERIOR

- MOISTURE CONTROL – Up to 10 lbs. MVER / 90% RH
- Persistent bond strength and exceptional retack to hold flooring down and in place
- Formulated to reduce hollow spots
- High solids formulation for excellent ridge holding
- Smooth to trowel and easy to clean up




TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
1660-4	4 Gallon	1



ROBERTS 1660 LOCKDOWN is a pressure sensitive engineered wood flooring adhesive formulated to reduce hollow spots. ROBERTS 1660 will cure with a persistent and permanent bond. This adhesive has high solids, which allows for excellent trowel ridge holding for optimal contact. VOC: < 1 g/L.

Open Time: Up to 60 min. **Working Time:** Up to 60 min.



1540 ALL-IN-ONE Urethane Flooring Adhesive

SUPERIOR

- ALL-IN-ONE: sound reducer, moisture barrier, 1/8" crack suppressant and bonding system
- Remains flexible to expand and contract with wood flooring
- Ideal for use over radiant heat subfloors
- Suitable for rubber flooring installations

TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
R1540-4	4 Gallon	1

SOUND RATING:
IIC 70 STC 66 ΔIIC 22

ROBERTS 1540 is a single step, 100% solids moisture-cure polyurethane adhesive formulated to bond engineered wood, solid wood and bamboo flooring. ROBERTS 1540 provides moisture vapor emissions control on concrete slabs (up to 20 lbs. MVER or 90% RH); once cured the adhesive forms a water-resistant membrane. It also bridges non-structural cracks in concrete (up to 1/8"). This adhesive is suitable for use with radiant heat systems. VOC: < 1 g/L.

Working Time: Up to 120 min. **Initial Cure:** 8-10 hrs. **Final Cure:** 12 hr minimum





1520 Urethane Flooring Adhesive

PREFERRED

- Permanent, tenacious bond with high elongation properties
- Highly elastomeric to move with the expansion/contraction of wood
- Cured adhesive is unaffected by moisture
- Excellent green grab, low VOC
- Ideal for wood planks up to 7" wide
- Suitable for rubber flooring installations

TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
1520-4	4 Gallon	1

ROBERTS 1520 is a single component, moisture-cure urethane adhesive formulated to bond engineered wood, solid wood, teak and bamboo flooring. ROBERTS 1520 has good upfront green grab and develops a permanent bond and remains flexible to withstand expansion and contraction of the flooring without stressing the adhesive. Once adhesives is cured, it is unaffected by moisture. VOC: 30 g/L.

Open Time: Up to 60 min. **Cure Time:** 4-12 hrs.




1407 Engineered Wood Flooring Adhesive

PREFERRED

- Easy to trowel; great green grab; strong durable bond
- Available in cartridge sizes – Perfect for quick repairs and installing thresholds, wood stair nosing, wood risers, moldings, stair wood moldings and medallions
- Great for double bond installs; cork underlayment to subfloor / wood flooring to cork underlayment

TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
1407-4	4 Gallon	1
1407-1	1 Gallon	4
1407-30C	30 Ounces	12
1407-10C	10 Ounces	12

ROBERTS 1407 is an acrylic urethane adhesive designed for the installation of engineered (up to 5" wide) wood flooring providing long term performance. Smooth and easy to trowel formula with great green strength for flooring placement. VOC: 2 g/L.

Open Time: Up to 20 min. **Working Time:** Up to 30 min.



1404 Wood Flooring Adhesive

PRIMARY

- High solids formula with low moisture content
- Excellent initial grab and great trowel ridge holding
- Remains flexible and moves with the flooring

ROBERTS 1404 is an adhesive specifically designed to adhere 3-, 5- and 7-ply engineered wood flooring and pre-finished parquet. It develops an excellent initial tack to assist in holding boards in place during installation which makes installation easier. It remains flexible and moves with the wood as it reacts to environmental changes. VOC: < 1 g/L.

Open Time: Up to 15 min. **Working Time:** Up to 40 min.

TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
1404-4	4 Gallon	1



1406 Tongue & Groove Adhesive

SUPERIOR

- Exceptional bond strength and fast drying; applies white and dries clear
- Meets the specifications of ANSI/HPVA Type II/D3

ROBERTS 1406 is a high strength PVA adhesive with specialized applicator tip for precise placement of the adhesive. VOC: < 1 g/L.

Coverage: Up to 400 lineal feet per pint. **Assembly Time:** Within 5 min. **Drying Time:** 12-24 hrs.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
1406-P	1 Pint	12



10-33 Universal Putty Repair Kit

- Quickly repair scratches, cracks and other damage on wood floors, vinyl floors and counters, wood cabinets, moldings and furniture
- Easy to sand, accepts top coat finishes and stainable
- Five (5) colors to custom mix and create unlimited shades to match any project
- List of color formulas available at www.robertsconsolidated.com

Shipped in a master pack of six kits with clip strip for easy display





Wood, Laminate & Vinyl Putty

- Fills gaps, nicks and scratches on flooring
- Acrylic based putty is easy to use and fast drying
- Can be sanded, painted or stained
- Eight (8) color choices to match a wide variety of flooring



AVAILABLE COLORS/SIZES

Item No.	Color	Unit Size	Pkg. Qty.
PC7725	Brown	3 oz	6
PC7726	Light	3 oz	6
PC7727	Light Red	3 oz	6
PC7728	Gray	3 oz	6
PC7729	Gold Tones	3 oz	6
PC7730	Tan	3 oz	6
PC7731	Dark Red	3 oz	6
PC7732	Dark Brown	3 oz	6

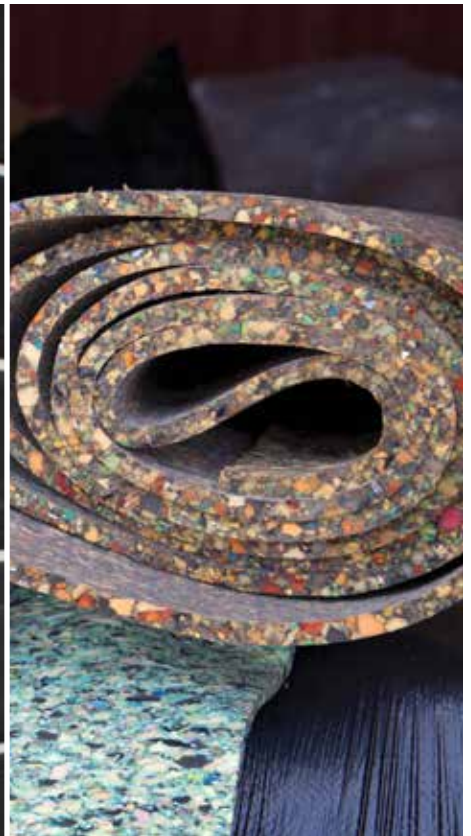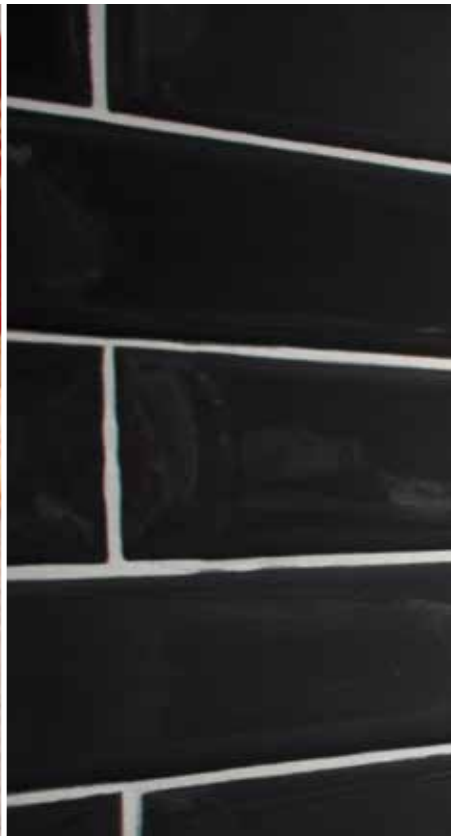

Specialty Adhesives

TACK^{AND}CRACK

2018 Tack Strip Adhesive & Crack/Joint Filler

SUPERIOR

- Tough, flexible and versatile - use as a tack strip adhesive or to repair cracks or fill joints
- Fast-setting with high bond strength; stretch and install carpet in 20 minutes
- Low viscosity two-part system and mixes within nozzle tip
- Quick, easy application with standard cartridge gun



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
2018-9C	8.6 Ounces	12

ROBERTS 2018 TACK & CRACK is a versatile fast-setting, high-strength, tack strip adhesive and crack/joint filler. It is a two-part, self-leveling polyurea formulation designed to be easily mixed and dispensed using a standard cartridge gun. ROBERTS 2018 allows for carpet to be stretched and installed in 20-30 minutes. As a filler, it self levels, will remain flexible and will allow for 10-15% movement of installed joint width. VOC: < 10 g/L.

⚠️WARNING: Cancer - www.P65Warnings.ca.gov. See P. 21, *Prop 65 - 2.

Working Time: 5 min. at 0°F (18°C), 3-5 min. at 75°F (24°C)

Tack Time: Up to 20 min.



QUICKBOND

8200 Spray Adhesive For Carpet Pads & More!

SUPERIOR

- Tacks quickly with a web spray pattern
- Permanent or repositionable bond
- VOC compliant and meets OTC specifications
- Does not contain chlorofluorocarbons (CFCs), ozone depleting chemicals, or methylene chloride
- Reduces install time
- Quick installation of carpet pads, cork wall tiles and much, much more!

ROBERTS 8200 is a fast tacking aerosol construction adhesive with the versatility to be used on a wide array of substrates. ROBERTS 8200 is formulated to bond to paper, cardboard, fabric, leather, foil, fiberglass to metal, drywall, masonry, wood and a variety of other substrates. VOC: 89 g/L. **EXTREMELY FLAMMABLE**
NOT FOR SALE IN CALIFORNIA

Coverage: Up to 100 ft² per 12 ounce can

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
8200-12	12 Ounces	12



8250 Universal Floor Polish

SUPERIOR

- Restores luster and shine to pre-finished floors
- Protects flooring from scuffs, scratches and dirt
- Easy to apply, low-odor water-based formula polishes up to 2,000 ft² per gallon
- Use with microfiber pad or high-speed polisher for a high gloss finish

ROBERTS 8250 is a commercial strength floor polish for use on virtually any flooring surface – hardwood, laminate, ceramic tile, sheet vinyl, LVT/LVP, VCT, linoleum, rubber tiles. ROBERTS 8250 quickly restores luster and shine to floors. May also be used with a high-speed buffer to achieve a high gloss. VOC: 38 g/L.

Coverage: Up to 2000 ft² per gallon

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
R8250-1	1 Gallon	4



1331 Multipurpose Primer

PREFERRED

- Multipurpose - one primer for porous and non-porous substrates
- Improves adhesion on porous substrates, plus peel and stick tiles and membranes
- Bonds to a variety of substrates, including gypsum, OSB, metal
- Easy to apply with brush, roller or spray

ROBERTS 1331 is a high performing acrylic latex primer designed to seal porous surfaces, while enhancing and improving the bond performance of adhesives and peel and stick tiles and membranes. ROBERTS 1331 was designed to go over a variety of substrates, including cementitious, gypsum underlayments, adhesive residue, exterior decks, and well bonded epoxy coating. VOC: < 1 g/L.

Coverage: Up to 400 ft² per gallon (over porous substrates)

Drying Time: 30-60 min; varies with temperature and humidity

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
1331-1	1 Gallon	4



5900 Ceramic Tile Adhesive

PREFERRED

- Premixed and ready-to-use
- Type I Mastic for floors and walls
- Meets ANSI A136.1 Type I and II specifications
- Spreads easily, dries fast, simple cleanup

TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
5900-3	3.5 Gallon	1
5900-1	1 Gallon	4
5900-0	1 Quart	6

ROBERTS 5900 Ceramic Tile Adhesive is a high performance, ready-to-use, Type I Mastic for installing ceramic, porcelain, natural stone, quarry and mosaic tile on floors and walls. It may be used for countertop, backsplash and shower wall installations, too. It spreads effortlessly, sets quickly and is easy to clean up. VOC: 1 g/L.

⚠️WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See P. 21, *Prop 65 - 3.

Open Time: 20-35 min.

Working Time: 20-35 min.

Drying Time: 24 hrs.




7250 Cork Underlayment Adhesive

PREFERRED

- Strong initial grab and good tack
- Resists mold and mildew with GoldGuard® protection
- Extended working time for optimal placement/positioning
- NFPA Class A/UBC Class 1 Fire Ratings

TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
7250-4	4 Gallon	1
7250-1	1 Gallon	4

ROBERTS 7250 is recommended for the installation of acoustical cork underlayment rolls or sheets (underlayment quality). It provides a strong initial grab and good tack. VOC: < 1 g/L.

Open Time: Up to 60 min.

Working Time: Up to 90 min.



1030 Latex Contact Cement

PREFERRED

- High strength, high coverage
- Heat and water resistant bond

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
R1030-1	1 Gallon	4

ROBERTS 1030 is a solvent-free, brush-grade latex-based contact cement. It may be used to bond a wide variety of surfaces and offers a high strength, heat resistant bond. Finished assemblies can be used immediately. VOC: < 1 g/L.

Coverage: Approximately 900 ft² per gallon

Dry Time: Up to 30 min

Open Time: 2 hr. maximum





Construction Adhesive

30 DRYWALL, PANEL & FOAM Adhesive

- Strong, immediate grab for easy installation
- Provides a permanent bond to minimize nailing and nail pops
- Smooth and simple cartridge gun application
- Quick and effortless clean-up with water
- Non-solvent formula

ROBERTS 30 DRYWALL, PANEL & FOAM Adhesive is specifically formulated for the interior installation of drywall, paneling and foam board. This premium-grade construction adhesive provides immediate grab with good tack for accurate placement and a permanent bond, reducing the need for nailing and preventing nail pops. VOC: <1 g/L.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
30-30C	30 Ounces	12



Adhesive Cleaners

MULTIPURPOSE

CARPET

RESILIENT

WOOD

SPECIALTY

CONSTRUCTION

CLEANERS

REFERENCE

TROWELS

5505 Urethane Adhesive Remover

SUPERIOR

- Quick and easy adhesive spot removal
- Extremely low odor
- Wipes are biodegradable
- Advanced technology formula

ROBERTS 5505 is a superior cleaner to aid in the removal of fresh and dried adhesive from flooring surfaces and tools. Also available as wipes. VOC: < 500 g/L.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
R5505	24 Ounces	12
R5505-W	60 Wipes	6



8000 Flooring Adhesive Remover

SUPERIOR

- New and improved formula
- Fast-acting concentrate
- Higher coverage rate – Up to 250 ft² per gallon (diluted)
- Non-flammable, low odor, VOC and OTC Clean Air Act compliant

ROBERTS 8000 Flooring Adhesive Remover is a concentrated environmentally-friendly formula developed to efficiently and effectively remove floor coverings and adhesives without harsh chemicals. This commercial strength product penetrates the floor covering to break down the adhesive for quick and easy removal. It is also ideal for stripping the toughest latex and acrylic adhesives from flooring surfaces. VOC: < 50 g/L.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
R8000-1	1 Gallon	4



8100 Adhesive Remover

SUPERIOR

- VOC and OTC Clean Air Act compliant
- Professional strength, ready-to-use
- Low odor, non-flammable

ROBERTS 8100 is a VOC and OTC Clean Air Act compliant professional strength cleaner for the speedy removal of most adhesives and carpet seam sealers. VOC: < 45 g/L.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
R8100-24	24 Ounces	12



ADHESIVE REFERENCE CHART

		CARPET										RESILIENT & WALL BASE										WOOD				
		Polypropylene (ActionBac)	Jute	Hot Melt	Enhancer (Urethane Foam)	Latex Unitary	Needle Punch	Woven Interlock	Vinyl-Backed Carpet/Carpet Tile	Closed Cell Urethane	Double-Bond Method (Carpet-to-Cushion)	Double-Bond Method (Cushion-to-Floor)	Vinyl Composition Tile (VCT)	Sheet Goods (Felt/Mineral Backed)	Sheet Goods (Solid Vinyl/Homogeneous/Heterogeneous)	Sheet Goods (Fiberglass)	Luxury Vinyl Tile (Up to 12" x 12")	Luxury Vinyl Tile/Plank (Large Format, > 12" x 12")	Vinyl/Rubber (TPR) Cove Base	Polyurethane Laminate (LifeSpan)	Rubber-synthetic/natural (Sheet, Tile, Plank)	Recycled Rubber Flooring	Engineered Wood Plank	Parquet (Non-Foam Backed)	Solid Plank/Parquet/Exotics (Bamboo, Cork, Teak)	
MULTIPURPOSE	3300 SUPERIOR	BEST	BEST	BEST	GOOD	BEST	BEST	BEST		BETTER	BEST	BEST		BEST												
	3085 PREFERRED	BETTER	BETTER	BETTER	GOOD	BETTER	BETTER	BETTER		GOOD	BETTER	BETTER		BETTER												
	3080 PREFERRED	BETTER	BETTER	BETTER		BETTER	BETTER	BETTER		GOOD				BETTER												
	3000 PRIMARY	GOOD	GOOD			GOOD						GOOD		GOOD												
	3050 PRIMARY	GOOD	GOOD			GOOD						GOOD		GOOD												
CARPET	3095 SUPERIOR	BEST	BEST	BEST	BEST	BEST	BEST	BEST		BEST	BEST	BEST														
	3900 PREFERRED	BETTER	BETTER	BETTER	BETTER	BETTER	BETTER	BETTER		BETTER	BETTER	BETTER														
	3500 PRIMARY	GOOD	GOOD		GOOD	GOOD																				
	6300 SUPERIOR				BEST				BEST	BEST				BETTER		BETTER	BETTER									
	6280 PREFERRED				BETTER				BETTER						GOOD		GOOD									
	6700 SUPERIOR	BEST	BEST	BEST	GOOD	BEST	BEST	BEST		GOOD																
RESILIENT	7350 SUPERIOR								BEST				BETTER	BEST	BEST	BEST	BEST		BETTER	GOOD						
	2350 SUPERIOR								BETTER				BEST	BEST	BEST	BETTER			BETTER							
	5350 SUPERIOR																			BEST	BETTER					
	7000 SUPERIOR								BETTER				BETTER	BETTER	BETTER	BETTER										
	2310 SUPERIOR														BEST	BEST				BEST						
	2001 SUPERIOR													BEST												
	2057 PREFERRED													BEST												
	7200 SUPERIOR																			BEST						
WOOD	1660 SUPERIOR																GOOD	GOOD					BEST	BETTER		
	1540 SUPERIOR																				BEST	BEST	BEST	BEST	BEST	
	1520 PREFERRED																				BETTER	BETTER	BETTER	BETTER	BETTER	
	1407 PREFERRED																			GOOD			BETTER	BETTER		
	1404 PRIMARY																						GOOD	GOOD		
	1406 SUPERIOR																						BEST	BEST	BEST	

MULTIPURPOSE

CARPET

RESILIENT

WOOD

SPECIALTY

CONSTRUCTION

















CLEANERS

REFERENCE

TROWELS

TROWEL CHART

All trowels measure: Width x Depth x Space Apart

Notch Size	Application	Item No.	Coverage
 1/8" x 1/8" x 1/16"	Carpet (polypropylene, woven)	49737, 10137-12	90-110 ft ² per gallon
 1/8" x 1/8" x 1/8"	Carpet (polypropylene, woven), Cork Tile, Parquet, Cork Underlayment, Foam-backed Parquet	n/a	65-75 ft ² per gallon
 3/32" x 3/32" x 3/32"	Carpet (closed-celled urethane, Enhancer™), Carpet (vinyl-backed broad-loom), Vinyl Sheet, Tile, & Plank, Rubber Sheet & Tile, Cork Underlayment	10-820, 10-833	100-120 ft ² per gallon
 1/16" x 1/16" x 3/32"	Felt-Backed Sheet Vinyl, Vinyl Composition Tile, Fiberglass Sheet & Luxury Vinyl Tile & Plank	49736, 10121-12	160-180 ft ² per gallon
 1/16" x 1/16" x 1/16"	Felt-Backed Sheet Vinyl, Carpet Tile, Vinyl Tile & Plank, Vinyl Composition Tile, Fiberglass Sheet, Rubber Sheet & Tile	10-810, 10-823, 10125, 10-180-12 (DOUBLE SIDED)	170-190 ft ² per gallon
 1/16" x 1/32" x 1/32"	Vinyl Tile & Plank, Luxury Vinyl Tile & Plank, VCT over VCT	10-816, 10-829, 10-180-12 (DOUBLE SIDED)	220-240 ft ² per gallon
 1/16" x 1/32" x 5/64"	Carpet Tile, Fiberglass Sheet, Felt-Backed Sheet, VCT, Rubber/Vinyl Sheet & Tile	49738, 10122	300-320 ft ² per gallon
 Medium Nap Roller	Luxury Vinyl Tile, Carpet Tile, Fiberglass-Backed Sheet Vinyl	n/a	Up to 350 ft ² per gallon
 3/16" x 5/32"	Wall Base (4")	10033	120-150 lineal feet per gallon 45-50 ft ² per gallon
 Snuzzle Applicator	Wall Base	10-981-25	40-60 lineal feet per 30 ounces
 1/8" x 1/8" x 1/8"	Wall Base, Prefinished Parquet	10123-12	100-150 lineal feet per gallon 70-80 ft ² per gallon
 1/4" x 1/4" x 1/4"	Prefinished Engineered Wood (1/2" thick) Solid Wood & Bamboo Flooring (1/2" thick)	49713Q, 10113Q	30-40 ft ² per gallon
 1/4" x 1/4" x 1/4"	Prefinished Engineered Wood & Acrylic Impregnated Plank (1/2" thick) Solid Wood & Bamboo Flooring (1/2" thick)	10-850, 10142-12	45-55 ft ² per gallon
 3/16" x 1/4" x 1/2"	Laminated Wood Plank, Solid Wood, Bamboo & Acrylic Impregnated Plank Flooring	49730	50-60 ft ² per gallon
 3/8" x 5/16"	Wood Flooring (1/2" to 3/4" thick)	10143	25-30 ft ² per gallon
 1/4" x 3/16" Tiger Tooth®	Wood Flooring (1/2" thick)	10144	30-35 ft ² per gallon

The trowel notches shown are those typically recommended for the type of wall/flooring products being installed. They are normally the minimum size recommended. Consult wall / flooring manufacturer for their specific trowel recommendation. Surface conditions (roughness and porosity of surface/substrate) type of product and backing of product will ultimately determine the required trowel notch size and coverage.

ROBERTS®, GoldGuard®, Tiger Tooth® and the e® logo are registered trademarks of Roberts Consolidated, Inc. | Q.E.P.® is a registered trademark of Q.E.P. Co., Inc. CRI Green Label +Plus® is a registered trademark of The Carpet and Rug Institute. | LEED® and its related logo, is a trademark owned by the U.S. Green Building Council® and is used with permission. ActionBac® is a registered trademark of Propex Operating Company, LLC | Enhancer™ is a trademark of The Dow Chemical Company | SoftBac® is a registered trademark of Shaw Industries, Inc.

See our Tool Catalogs online at www.robertsconsolidated.com and qep.com
for a complete listing of our Carpet, Tile, Stone, Laminate, Wood and Vinyl Installation Tools and Accessories.

ABOUT CALIFORNIA PROPOSITION 65

Proposition 65 is a California regulatory law that requires businesses to notify California consumers about specific chemicals in the products they purchase so they can make informed decisions about protecting themselves from exposure to these chemicals. This law requires that all companies properly label products that contain chemical(s) above certain threshold levels.

As part of Q.E.P. Inc.'s continued best business practice and compliance program, we will continue to comply with the Proposition 65 warning requirements and provide the product-associated warnings as part of our ongoing effort to comply with the law. We are dedicated to meeting consumer product safety requirements applicable to our products and strive to provide high quality and safe products.

For more information on California Proposition 65, go to www.P65Warnings.ca.gov.

- *Prop 65 - 1. **⚠️WARNING:** This product can expose you to chemicals including Acrylonitrile, which is known to the State of California to cause cancer.
- *Prop 65 - 2. **⚠️WARNING:** This product can expose you to chemicals including Carbon Black and Titanium Dioxide, which are known to the State of California to cause cancer.
- *Prop 65 - 3. **⚠️WARNING:** This product can expose you to chemicals including Quartz and Styrene, which are known to the State of California to cause cancer and Methanol, which is known to the State of California to cause birth defects or other reproductive harm.

WORLD CLASS WORLDWIDE



1001 Broken Sound Parkway, NW | Suite A
Boca Raton, Florida 33487

Customer Service: 866-435-8665
Technical Assistance: 706-277-5294
Se habla español

www.robertsconsolidated.com

01619-11290
Reorder # ROBADHESIVE2020