


CTDOT Flex Barrier Marker (FB49)

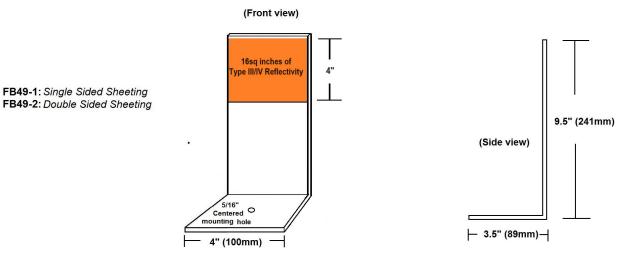

The FB49 is a top mount delineator that offers over **16** square inches of reflectivity. The marker body is made of a high impact polycarbonate .090" (2.3mm) thick and will flex instead of bend or break when struck. The combination of strength and visibility make this a great option for any top mount barrier application.

Flex Barrier Markers (FB's) shall meet the minimum specific intensity requirements as follows:

Reflective Sheeting Available	
ASTM D-4956 Spec	Traffic/Work Zone Colors
III/IV	White, Yellow, Blue, Green, Red, Brown
VIII	White, Yellow, Blue, Green, Red, Fluorescent Yellow, Fluorescent Yellow/Green, Fluorescent Orange
IX	White, Yellow, Blue, Green, Red, Fluorescent Yellow, Fluorescent Yellow/Green, Fluorescent Orange
XI	White, Yellow, Blue, Green, Red, Brown, Fluorescent Yellow, Fluorescent Yellow/Green, Fluorescent Orange

Installation: Use our manufacturer approved adhesive to mount the FB49. Run an 1/8" bid across the base of the part (see instructions for surface prep, application and storage information).

Application Rate: 18 Units/Tube of Adhesive Cement