


Straight Guardrail Delineator (Alaska)

(Mounts to Guardrail Support Posts)

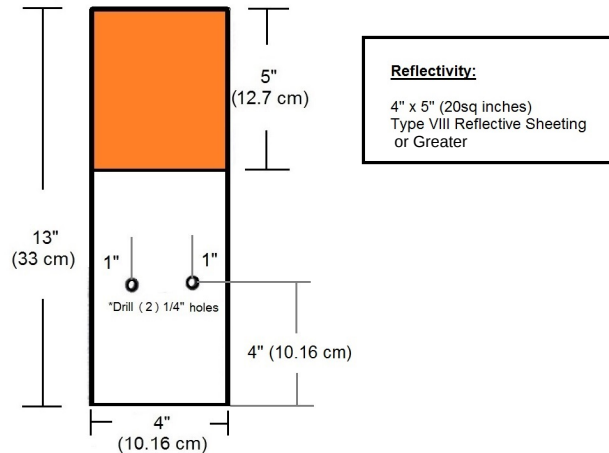

(Cal Trans specification is 10" height)

The bodies shall be made from a high-impact, weatherable engineering thermoplastic .090 (min) thick that conforms to the following:

Property	Results	ASTM Test Method
Tensile Strength @ Yield (min. psi)	5,000	D638
Impact Strength @ 73°F (Ft #/in notch)	10.0	D256
Impact Strength @ -40°F	1.5	D256
Flexural Strength 1/4" @ 73°F	8,000	D790
Flexural Modulus 1/4" @ 73°F	24,000	D790

The reflector shall be permanently affixed with retro-reflective acrylic microprism tape with acrylic backing, or approved equal. The tape (white) shall have a minimum reflectance of 1,000 candlepower per footcandle per square foot (candelas/lux/m²) at 0.1° observation and -4° entrance angles. (Yellow tape shall be 60% of the white.) Photometric performance for various models is available upon request.

Straight Style

Straight Delineators may be mounted directly to wooden or metal guardrail support posts.