

STR413 (Arizona)

Reflective Sheeting*


1Y --> Yellow 1-way

2Y --> Yellow 2-way

1W --> White 1-way

2W --> White 2-way

**Additional colors available by special order*

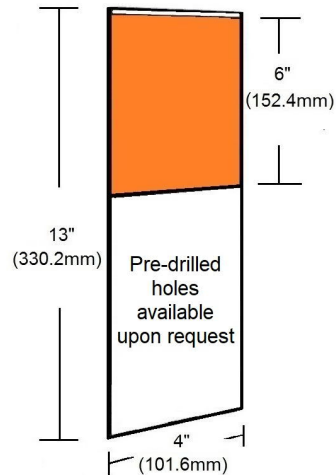

The bodies shall be made from a high-impact, weatherable engineering thermoplastic .090 (min) thick that conforms to the following:

Property	Results	ASTM Test Method
Tensile Strength @ Yield (min. psi)	5,000	D638
Impact Strength @ 73°F (Ft #/in notch)	10.0	D256
Impact Strength @ -40°F	1.5	D256
Flexural Strength 1/4" @ 73°F	8,000	D790
Flexural Modulus 1/4" @ 73°F	24,000	D790

Reflective Sheeting Available

ASTM D-4956 Spec	Traffic/Work Zone Colors
XI	White, Yellow, Blue, Green, Red, Brown, Fluorescent Yellow, Fluorescent Yellow/Green, Fluorescent Orange

Straight Style

Straight Delineators may be mounted directly to wooden or metal guardrail support posts.