

**RESPONSIVE**



**IMPACT**

**A BETTER FLOOR**

**TRANQUIL**


**SPC FLOORING**



**UNILIN™ CLICK SYSTEM | PAINTED BEVEL**

# TRANQUIL

SPC FLOORING: UNILIN™ CLICK SYSTEM

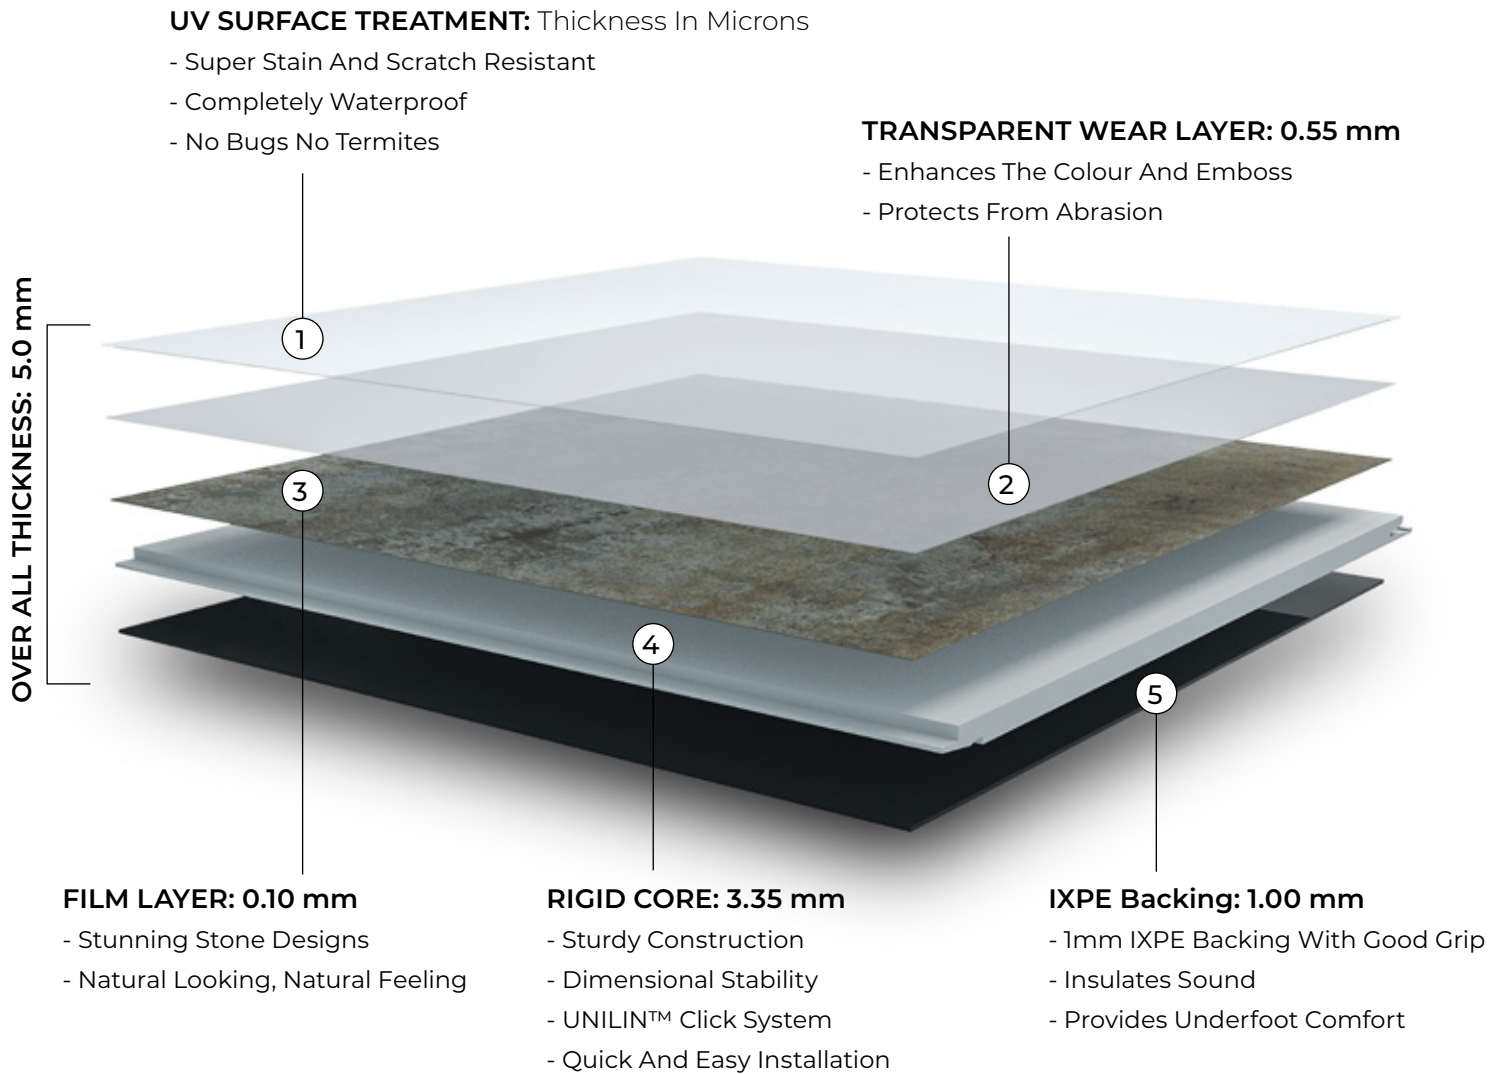

## FEATURES & BENEFITS

- |                            |                          |                                  |  |
|----------------------------|--------------------------|----------------------------------|--|
| <br>100% Waterproof        | <br>No Adhesive Required | <br>Easy Clean                   | <br>Superior Scratch & Stain Resistant |
| <br>Natural Looking Design | <br>Zero Maintenance     | <br>Superb Dimensional Stability | <br>Excellent Sound Insulation         |

## APPLICATIONS

- |                       |                 |
|-----------------------|-----------------|
| <br>Corporate Offices | <br>Residential |
| <br>Retail            | <br>Hospitality |

---

**CLOUD**  
IMP-TRQ-13

**CLOUD**

**IMP-TRQ-13**



**RESPONSIVE** 

**IMPACT**  
A BETTER FLOOR


---

# CLOUD


IMP-TRQ-13




A

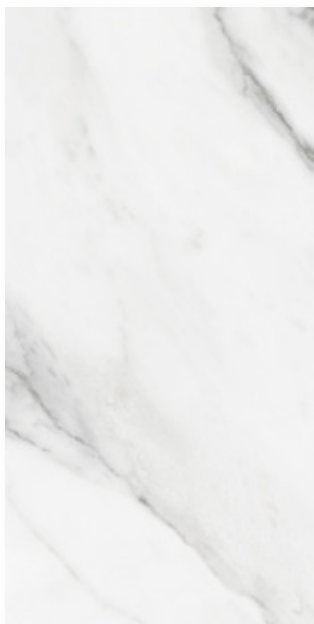


B

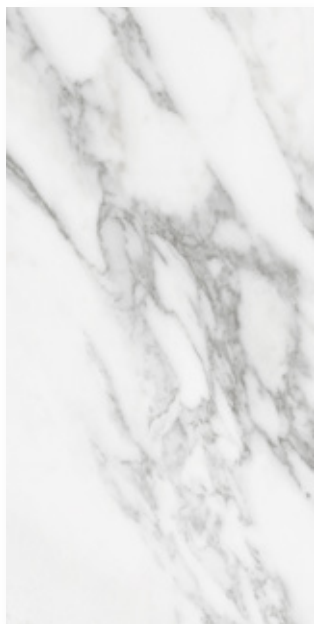


C

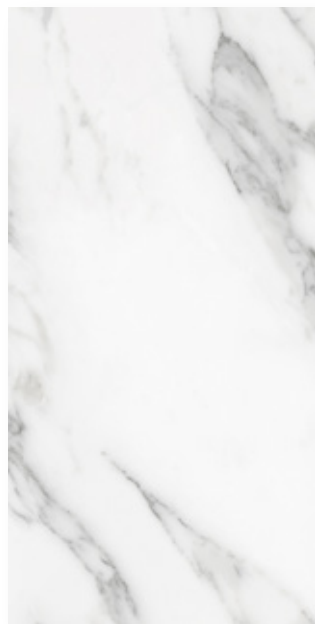


D

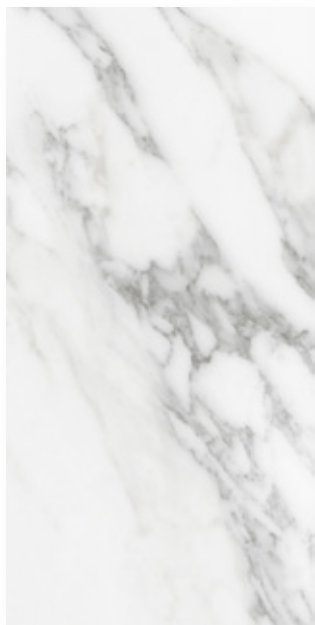


E

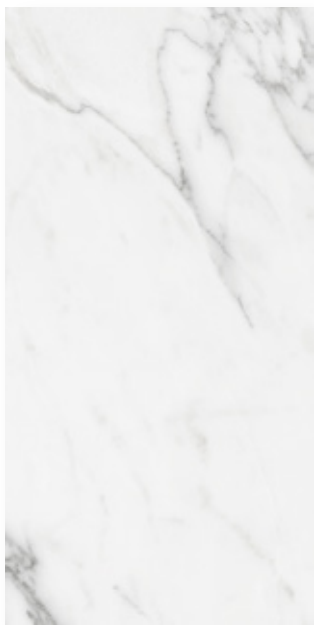

F

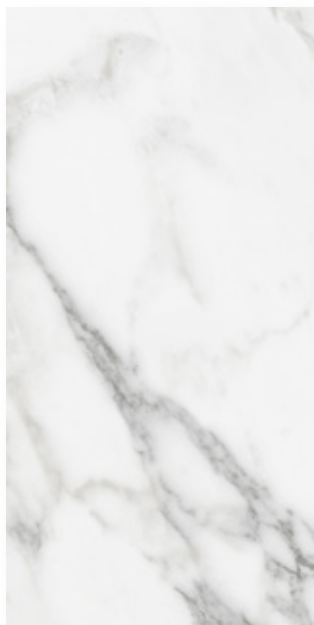

G

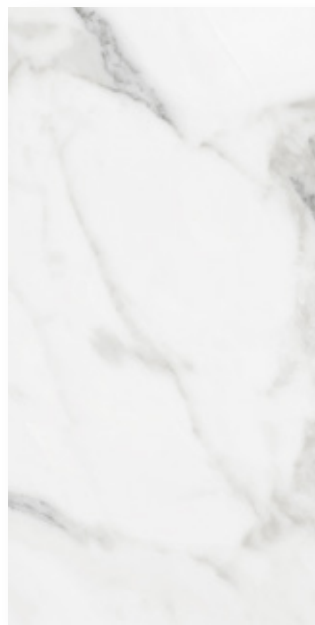

H

---

**RIVER**  
IMP-TRQ-14

RIVER  
IMP-TRQ-14



---

# RIVER

IMP-TRQ-14



A



B



C



D



E



F

---

**BEACH**  
IMP-TRQ-15

**BEACH**  
IMP-TRQ-15



**RESPONSIVE** 

**IMPACT**  
A BETTER FLOOR

---

# BEACH

IMP-TRQ-15



A



B



C



D



E



F

---

**RAIN**

IMP-TRQ-16


**RAIN**  
IMP-TRQ-16



---

# RAIN


IMP-TRQ-16

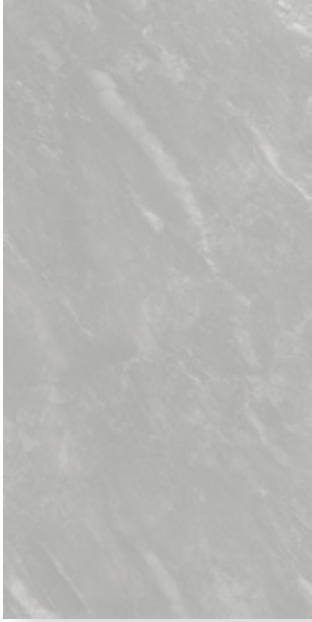

A




B

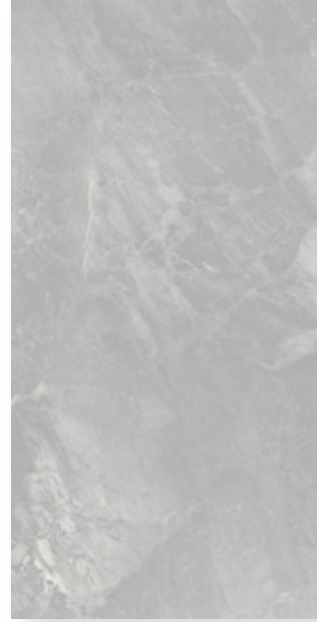


C



D

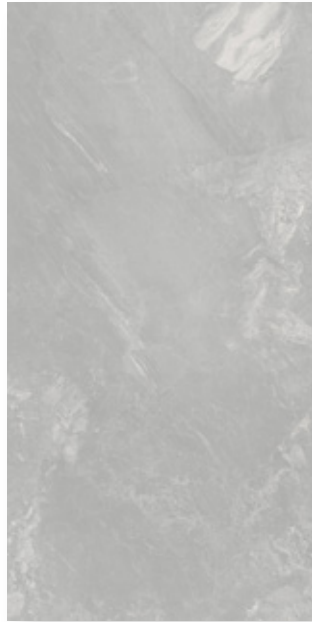

E

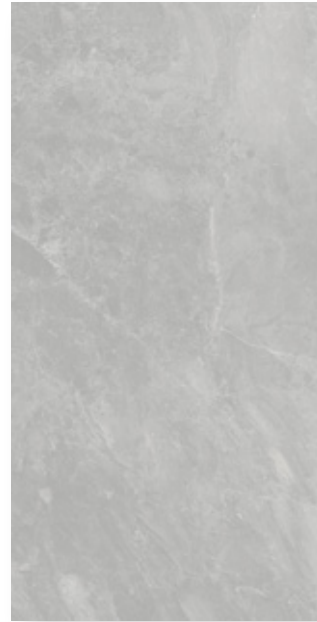

F

# TRANQUIL

## SPC FLOORING: UNILIN™ CLICK SYSTEM

SPC FLOORING FOR HEAVY COMMERCIAL USE

PUR Polyurethane Reinforcement | Product Standard TRANQUIL ASTM F3261

CERTIFICATION & CLASSIFICATION	STANDARD	TRANQUIL
TYPE OF FLOOR COVERING	ISO 10582	SPC
CE CERTIFICATION	EN 14041	YES
CLASSIFICATION	EN ISO 10874	HEAVY TRAFFIC : CLASS 33
TECHNICAL CHARACTERISTICS	STANDARDS	TRANQUIL
SURFACE TREATMENT	UV TREATED	PUR
TOTAL THICKNESS	EN ISO 2436 (EN 428)	5.0 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	0.55 MM   22 MIL
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
TOTAL WEIGHT	EN ISO 23997 (EN 430)	8.5 KG/M <sup>2</sup>   1.74 LBS / SQ.FT
FORM OF DELIVERY	EN ISO 24342 ( EN 427)	12" X 24" = 23.25 SQ.FT   12 PIECES / CARTON
	CARTONS PER PALLET	54 / PALLET   2186 LBS / PALLET
	EDGE FINISH	PAINTED BEVEL
TECHNICAL PERFORMANCES	STANDARDS	TRANQUIL
DIMENSIONAL STABILITY	EN ISO 23999 ( EN 434)	≤ 0.10%
REACTION TO FIRE	EN 13501 - 1	BFL- S1
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	PASS
FURNITURE LEG	EN 424	NO DAMAGE
CASTOR CHAIR	EN ISO 4918 (EN 425)	NO DAMAGE
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	≤ 2MM
IMPACT SOUND REDUCTION	EN ISO 140-8 EN ISO 717/2	ΔL <sub>NW</sub> = 18DB
LIGHT FASTNESS	EN ISO 105 - B02	> GRADE 6
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	GOOD RESISTANCE
SLIP RESISTANCE	DIN51130   EN 13893	R9   CLASS DS
STAIN RESISTANCE	EN 438-2	RATING 5, NO CHANGE



ISO 9001  
ISO 14001  
ISO 18001



33



RESPONSIVE 

IMPACT

A BETTER FLOOR

*Artisan Edge*  
SPC FLOORING



UNILIN™ CLICK SYSTEM | ROLLED BEVEL

# Artisan Edge

• WATERPROOF • SCUFF & SCRATCH RESISTANT • FADE RESISTANT • STAIN RESISTANT

**UV SURFACE TREATMENT:** Thickness In Microns

- Completely Waterproof
- Super Stain, Scratch & Scuff Resistant
- Fade Resistant

**TRANSPARENT WEAR LAYER:** 22MIL | 0.55 mm

- Enhances the Color And Embossing
- Protects From Abrasion

OVER ALL THICKNESS: 6.50 mm



**FILM LAYER:** 0.10 mm

- Elegant Wood Designs
- Natural Looking, Natural Feeling

**RIGID CORE:** 4.35 mm

- Sturdy Construction
- Dimensional Stability
- UNILIN™ Click System
- Quick And Easy Installation

**IXPE Backing:** 1.50 mm

- IXPE Backing With Good Grip
- Insulates Sound
- Provides Underfoot Comfort

**FEATURES & BENEFITS**

**APPLICATIONS**



100%  
Waterproof



Click Installation  
No Adhesive



Superior Scratch  
& Stain Resistant



No Sub-Floor  
Required



Easy  
Clean



Corporate  
Offices



Residential



Natural Looking  
Design



Zero  
Maintenance



Superb  
Dimensional  
Stability



Endures  
Medium  
Foot Traffic



Excellent  
Sound  
Insulation



Retail



Hospitality

---

**AURORA**  
ART-101

**RESPONSIVE** 

**AURORA**  
ART-101



A B C D E



---

**ORION**  
ART-102

**RESPONSIVE** 

**IMPACT**  
A BETTER FLOOR

# ORION ART-102

RESPONSIVE



A B C D E



---

**SERENE**

ART-103

**RESPONSIVE** 

**IMPACT**  
A BETTER FLOOR

SERENE  
ART-103



A B C D E



---

**CASPIAN**

ART-105

**RESPONSIVE** 

**IMPACT**  
A BETTER FLOOR

CASPIAN  
ART-105

RESPONSIVE



A B C D E



---

**CELESTE**  
ART-106

**RESPONSIVE** 

**IMPACT**  
A BETTER FLOOR

# CELESTE ART-106

RESPONSIVE



A B C D E



---

**MONET**  
ART-107

**RESPONSIVE** 

**IMPACT**  
A BETTER FLOOR

**MONET**  
ART-107

**RESPONSIVE**



A B C D E



# Artisan Edge


• WATERPROOF • SCUFF & SCRATCH RESISTANT • FADE RESISTANT • STAIN RESISTANT

SPC FLOORING FOR HEAVY COMMERCIAL USE | PUR POLYURETHANE REINFORCEMENT | PRODUCT STANDARD ARTISAN EDGE ASTM F3261

CERTIFICATION & CLASSIFICATION	STANDARD	ARTISAN EDGE
TYPE OF FLOOR COVERING	ASTM F3261   EN 16511	RESILIENT FLOORING IN MODULAR FORMAT WITH RIGID CORE (SPC)
CE CERTIFICATION	EN 14041	YES
CLASSIFICATION	EN ISO 10874	HEAVY TRAFFIC : CLASS 34
TECHNICAL CHARACTERISTICS	STANDARDS	ARTISAN EDGE
TOTAL THICKNESS	EN ISO 24336 (EN 428)	6.50 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	22 MIL WL   0.55 MM
SURFACE TREATMENT	UV TREATED	RQ PROTECT
TOTAL WEIGHT	EN ISO 23997 (EN 430)	51.28 LBS/CARTON = 23.26 KG/CARTON 2051 LBS/PALLET = 930.38 KG/PALLET
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 ( EN 427 ) PLANKS IN CARTON	7" X 60" = 23.62 SF/CARTON 180 mm X 1524 mm = 2.19 M <sup>2</sup> /CARTON
	PIECES	8 PIECES PER CARTON
	CARTONS	40 CARTONS / PALLET
	EDGE FINISH	ROLLED BEVEL
TECHNICAL PERFORMANCES	STANDARDS	ARTISAN EDGE
DIMENSIONAL STABILITY	EN ISO 23999 ( EN 434)	< 0.10%
REACTION TO FIRE	EN 13501 - 1	BFL- S1
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	PASS
FURNITURE LEG	EN 424	NO DAMAGE
CASTOR CHAIR	EN ISO 4918 (EN 425)	NO DAMAGE
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	< 2MM   PASS
IMPACT SOUND REDUCTION	EN ISO 140-8 EN ISO 717/2	Δ LNW = 21 DB
LIGHT FASTNESS	EN ISO 105 - B02	> GRADE 6
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	GOOD RESISTANCE   PASS
SLIP RESISTANCE	DIN51130   EN 13893	R9   CLASS DS
STATIC LOAD	ASTM F970	PASS



ISO 9001  
ISO 14001  
ISO 18001

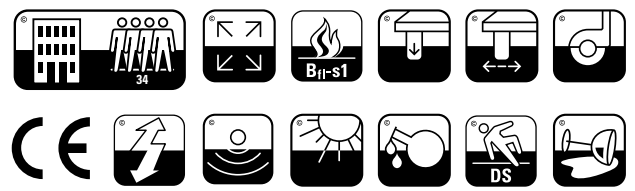

EN 14041



BOLICK DISTRIBUTORS  
2055 N. Airway Dr.  
Baton Rouge, LA 70815  
225-927-8016  
[www.bolickdistributors.com](http://www.bolickdistributors.com)

*Bolick*

