



eliane

THIRTY-THREE

Large Format Glazed Porcelain Tile

THIRTY-THREE 33x33

MARBLE AND STONE LOOK
LARGE FORMAT GLAZED PORCELAIN



WALLS



FLOORS



SHOWERS



EXTERIOR



FIRE PROOF



VOC FREE

Place AC / PO



84x84 cm | 33" x 33"

Marble Look V3

Cristal AC / PO



84x84 cm | 33" x 33"

Marble Look V3

Khali Off White AC / PO



84x84 cm | 33" x 33"

Stone Look V2

Gobi Shell AC / PO



84x84 cm | 33" x 33"

Stone Look V2



THIRTY-THREE PLACE AC/PO

Shade Variation **V3**

Size	Finish	Rect.	Work Size	Thick	Faces	Sq. Ft./ Carton	Pieces/ Carton
□ 33"x33"	AC (SATIN)	Yes	840 x 840 mm	9.0 mm	12	22.82	3
	PO (POLISHED)		836 x 836 mm	9.0 mm		22.60	

USAGE RECOMMENDATION

	Target DCOF wet	Porcelain Suitable
Dry & Level – Interior Floor (Residential / Light Commercial)	N/A	✓
Wet & Level – Interior Floor (Residential / Light Commercial)	≥ 0.42	✓ AC
Shower Floors (Residential / Light Commercial)	≥ 0.42	✓ AC
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Exterior Walls Applications	N/A	✓
Interior Walls/Backsplashes	N/A	✓
Interior Countertops	N/A	✓
Facades	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3.

Note: Porcelain tiles are suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS


	ASTM#	Porcelain Result
Water Absorption	C373	≤ 0.5%
Breaking Strength	C648	≥ 275 lbs
DCOF WET	ANSI A137.1 ANSI A326.3	≥ 0.42 AC < 0.42 PO
Frost Resistance	C1026	Yes
Scratch Hardness	MOHS	4
Stain Resistance	C1378	Resistant





THIRTY-THREE CRISTAL AC/PO

Shade Variation **V3**

Size	Finish	Rect.	Work Size	Thick	Faces	Sq. Ft./ Carton	Pieces/ Carton
 33"x33"	AC (SATIN)	Yes	840 x 840 mm	9,3 mm	6	22.82	3
	PO (POLISHED)		836 x 836 mm	9,3 mm		22.60	

USAGE RECOMMENDATION

	Target DCOF wet	Porcelain Suitable
Dry & Level – Interior Floor (Residential / Light Commercial)	N/A	✓
Wet & Level – Interior Floor (Residential / Light Commercial)	≥ 0.42	✓ AC
Shower Floors (Residential / Light Commercial)	≥ 0.42	✓ AC
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Exterior Walls Applications	N/A	✓
Interior Walls/Backsplashes	N/A	✓
Interior Countertops	N/A	✓
Facades	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3.

Note: Porcelain tiles are suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	ASTM#	Porcelain Result
Water Absorption	C373	≤ 0,5%
Breaking Strength	C648	≥ 275 lbs
DCOF WET	ANSI A137.1 ANSI A326.3	≥ 0.42 AC < 0.42 PO
Frost Resistance	C1026	Yes
Scratch Hardness	MOHS	4
Stain Resistance	C1378	Resistant





THIRTY-THREE

KALI OFF WHITE AC/PO

Shade Variation **V2**

Size	Finish	Rect.	Work Size	Thick	Faces	Sq. Ft./ Carton	Pieces/ Carton
□ 33"x33"	AC (SATIN)	Yes	840 x 840 mm	9.0 mm	14	22.82	3
	PO (POLISHED)		836 x 836 mm	9.0 mm		22.60	

USAGE RECOMMENDATION

	Target DCOF wet	Porcelain Suitable
Dry & Level – Interior Floor (Residential / Light Commercial)	N/A	✓
Wet & Level – Interior Floor (Residential / Light Commercial)	≥ 0.42	✓ AC
Shower Floors (Residential / Light Commercial)	≥ 0.42	✓ AC
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Exterior Walls Applications	N/A	✓
Interior Walls/Backsplashes	N/A	✓
Interior Countertops	N/A	✓
Facades	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3.

Note: Porcelain tiles are suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	ASTM#	Porcelain Result
Water Absorption	C373	≤ 0.5%
Breaking Strength	C648	≥ 275 lbs
DCOF WET	ANSI A137.1 ANSI A326.3	≥ 0.42 AC < 0.42 PO
Frost Resistance	C1026	Yes
Scratch Hardness	MOHS	4-5
Stain Resistance	C1378	Resistant





THIRTY-THREE

GOBI SHELL AC/PO

Shade Variation **V2**

Size	Finish	Rect.	Work Size	Thick	Faces	Sq. Ft./ Carton	Pieces/ Carton
□ 33"x33"	AC (SATIN)	Yes	840 x 840 mm	9.0 mm	14	22.82	3
	PO (POLISHED)		836 x 836 mm	9.0 mm		22.60	

USAGE RECOMMENDATION

	Target DCOF wet	Porcelain Suitable
Dry & Level – Interior Floor (Residential / Light Commercial)	N/A	✓
Wet & Level – Interior Floor (Residential / Light Commercial)	≥ 0.42	✓ AC
Shower Floors (Residential / Light Commercial)	≥ 0.42	✓ AC
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Exterior Walls Applications	N/A	✓
Interior Walls/Backsplashes	N/A	✓
Interior Countertops	N/A	✓
Facades	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3.


Note: Porcelain tiles are suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	ASTM#	Porcelain Result
Water Absorption	C373	≤ 0.5%
Breaking Strength	C648	≥ 275 lbs
DCOF WET	ANSI A137.1 ANSI A326.3	≥ 0.42 AC < 0.42 PO
Frost Resistance	C1026	Yes
Scratch Hardness	MOHS	4-5
Stain Resistance	C1378	Resistant



THIRTY-THREE

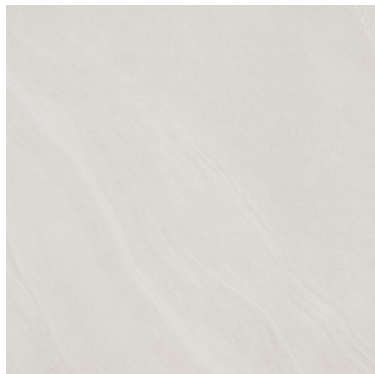

BOLICK DISTRIBUTORS

2055 N. Airway Dr.

Baton Rouge, LA 70815

225-927-8016

www.bolickdistributors.com