

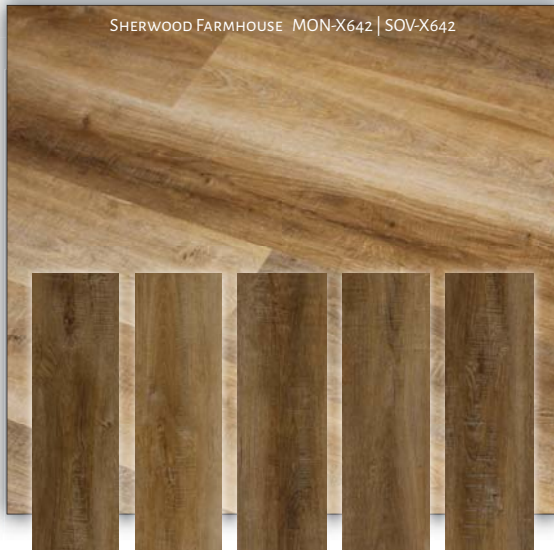

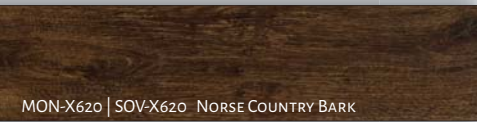




adore.
REGENT
 SOLID RIGID CORE

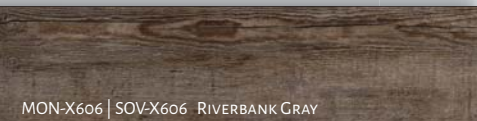

SOVEREIGN
 commercial click down flooring

- 7.0" x 48.0" nominal plank dimensions
- 12.0" x 24.0" nominal tile dimensions
- 6.0 mm total thickness
- 4.0 mm core gauge
- 22 mil (0.55mm) wear layer
- Luxurious 1.5 mm attached IXPE pad
- Industry-leading click down installation
- Duramond™ surface enhancement
- Orthophthalate-free construction
- 100% recyclable after use

Planks - 10 planks / 23.75 ft² (nom.)
 Tiles - 12 tiles / 24.00 ft² (nom.)

15 Year Commercial Warranty
 Lifetime Residential Warranty

SPECIFICATION TESTING FOR RIGID SOLID CORE

	Standard	Sovereign Result	Monarch X Result
Total Thickness	ASTM F-386	6.0mm	4.8mm w/pad
Wear Layer Thickness	ASTM F-410	0.55 mm/22 mil	0.3mm/12 mil
Critical Radiant Flux	ASTM E-648	Class I	Class 1
Chemical Resistance	ASTM F-925	No change 24 hours	No change 24 hours
Static Load Limit	ASTM F-970	1,500 psi	1,500 psi
Heat Stability	ASTM F-1514	<8.0 Delta E	<8.0 Delta E
Light Stability	ASTM F-1515	<8.0 Delta E	<8.0 Delta E
Residual Indentation	ASTM F-1914	<0.002 Inch	<0.002 inch
Size Change	ISO 23999	Pass	Pass
Size and Squareness	ASTM F-2421	<0.25%	<0.25%
Static Coefficient of Friction	ASTM D2047	Meets or exceeds 0.6	Meets or exceeds 0.6
Cupping/Curling	ISO 23999	≤0.10mm	<0.05mm
Impact Sound Transmission (IIC)	ASTM E-492	IIC 63	IIC 63
Airborne Sound Transmission (STC)	ASTM E-90	STC 53	STC 53
Impact Sound Reduction (ΔIIC)	ASTM E-2179	ΔIIC 24	ΔIIC 24

MONARCH X
 featuring an attached pad

- 5.9" x 48.0" nominal plank dimensions
- 12.0" x 24.0" nominal tile dimensions
- 4.8 mm total thickness
- 3.5 mm core gauge
- 12 mil (0.3mm) wear layer
- Class-leading 1.0 mm attached IXPE pad
- Industry-leading click down installation
- Duramond™ surface enhancement
- Orthophthalate-free construction
- 100% recyclable after use

Planks - 16 planks / 31.51 ft² (nom.)
 Tiles - 16 tiles / 32.00 ft² (nom.)

10 Year Light Commercial Warranty
 Lifetime Residential Warranty

