

Storm

Color Body Glazed Porcelain Tile | Glazed Porcelain Tile | Wall Tile

White | V3



48x48 NAT RECT | AM-204290E
48x48 POL RECT | AM-204292E
24x48 NAT RECT | AM-204284E
24x48 POL RECT | AM-204286E
12x24 NAT RECT | AM-80191ET
12x24 POL RECT | AM-80193ET

Single Bullnose
3x12 NAT RECT | AM-80194ET
3x12 POL RECT | AM-80200ET

White Ply | V3



24x48 NAT RECT | AM-204617E

Mos SQ 2x2 White | V3



12x12 NAT | AM-80181ET
12x12 POL | AM-80185ET


WALL
DECO

Hexa White | V3



8x8 NAT PRESSED
AM-204264E


Gray | V3

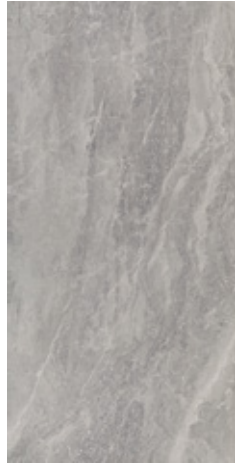

48x48 NAT RECT | AM-204620E
48x48 POL RECT | AM-204621E
24x48 NAT RECT | AM-204618E
24x48 POL RECT | AM-204619E
12x24 NAT RECT | AM-80210ET
12x24 POL RECT | AM-80211ET


Single Bullnose
3x12 NAT RECT | AM-80212ET
3x12 POL RECT | AM-80213ET

Gray Ply | V3

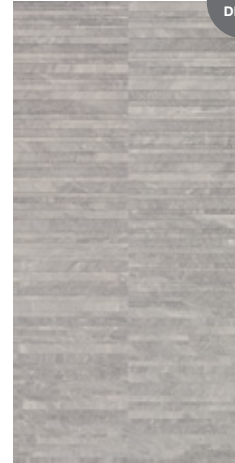

24x48 NAT RECT | AM-204643E

Mos SQ 2x2 Gray | V3



12x12 NAT | AM-80202ET
12x12 POL | AM-80206ET

WALL
DECO

Hexa Gray | V3



8x8 NAT PRESSED
AM-204622E

TECH DATA

Finish	Freeze Resistant	Shade Variation	Color Body	Water Absorption	Stain Resistant	DCOF AcuTest	Chemical Resistant	Breaking Strength	Abrasion Resistance
NAT	Resistant	V3	√ 12x24	≤ 0.5%	Class A	≥ 0.42	Class A	≥ 275lbf	III
POL	Resistant	V3	√ 12x24	≤ 0.5%	Class E	< 0.42	Class E	≥ 275lbf	II
NAT PLY	Resistant	V3	N/A	≤ 0.5%	Class A	N/A	N/A	≥ 275lbf	III

PACKING INFO


PRODUCT SIZE INCHES	ACTUAL SIZE	THICKNESS MM	LBS/ CARTON	PCS/ CARTON	SF/ CARTON	SF/ PALLET	LBS/ PALLET	CARTON/ PALLET	NUMBER OF FACES
2x2 Mosaic	11.87 x 11.87	10.00	39.99	10	10.00	360.00	1,484.09	36	10
8x8	7.87 x 7.87	8.00	13.23	10	3.23	445.46	1,825.43	138	70
12x24	11.70 x 23.50	10.00	55.32	6	11.46	641.76	3,097.90	56	25
24x48	23.56 x 48	9.00	67.24	2	15.39	492.38	2,151.70	32	25
24x48 PLY	23.56 x 48	10.20	75.69	2	15.39	430.83	2,119.30	28	25
48x48 NAT	47.19 x 47.19	9.00	69.42	1	15.39	646.25	2,915.66	42	18
48x48 POL	47.19 x 47.19	9.00	69.42	1	15.39	646.25	2,915.66	42	16

For reference only.

AREAS OF USAGE


Classification	Reference Category	Suitable
Interior, Dry	ID	√
Interior, Wet	IW	√ NAT
Interior, Wet Plus	IW+	√ 2x2 NAT
Exterior, Wet	EW	
Oils/Greases	O/G	

FORMATS

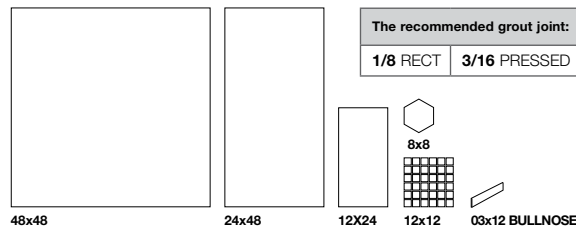

GROUT JOINT

The recommended grout joint:
1/8" RECT 3/16" PRESSED



White



BOLICK DISTRIBUTORS
2055 N. Airway Dr.
Baton Rouge, LA 70815
225-927-8016
www.bolickdistributors.com