

# 70-026


## BLACK JACK<sup>®</sup>

FLOATING FLOOR CUSHION UNDERLAYMENT

### Underlayment for laminate and engineered wood floors

#### COMFORT

2.5 mm foam provides optimal floor cushion

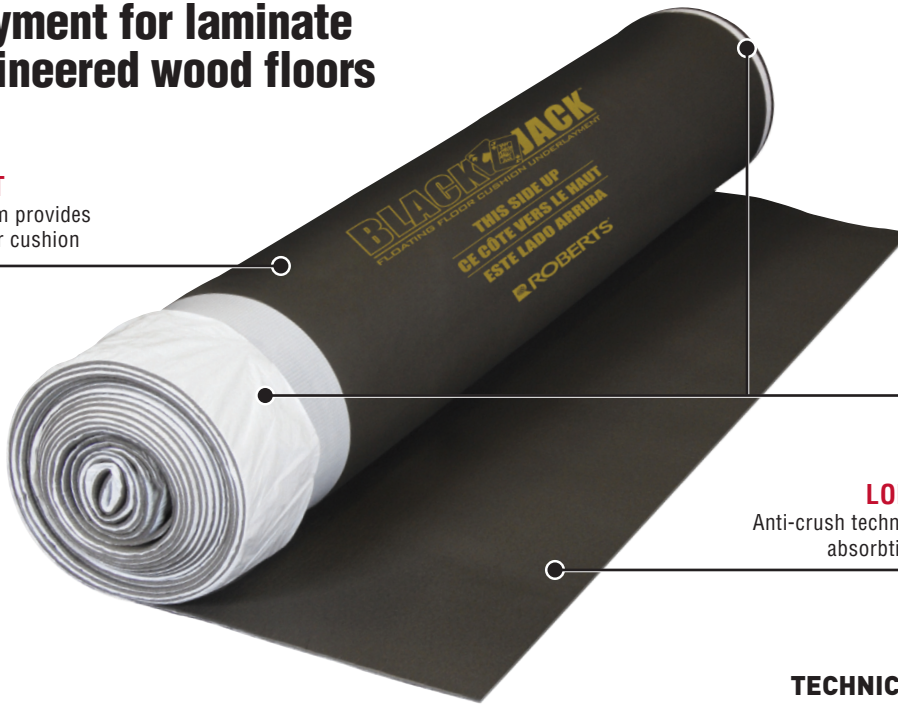

#### PROTECTION


Includes adhesive strip for easy installation and overlap film to seal out moisture

#### LONG LASTING


Anti-crush technology for shock absorption and long life

#### TECHNICAL SPECIFICATIONS


IIC (Impact Sound Transmission Test)	70
STC (Sound Transmission Loss Test)	66
Δ (Delta Rating)	21




Sound Reduction



Moisture Protection



Cushions Flooring



Mold Protection

IIC and STC tests measure sound transference from an upper level room to a lower level room. The IIC measures sound such as moving furniture and walking, while the STC measures sound such as voices and television. Minimum sound rating required by most building codes and architects is 50. Δ Delta Rating is the only true measurement of sound reduction from a product (not a floor assembly) in the industry.

Black Jack Floating Floor Cushion Underlayment<sup>®</sup> is a dense foam underlayment that helps absorb everyday in room noise under laminate and engineered flooring. The closed cell foam design is moisture resistant and fights against mold and mildew.

#### SPECIFICATIONS

ITEM #	70-026	70-026-XL
UNIT OF MEASURE	12 rolls / case	2 rolls / case
COVERAGE	100 sq. ft. / roll 1200 sq. ft. / case	600 sq. ft. / roll 1200 sq. ft. / case
WIDTH OF ROLL	43"	43"
LENGTH OF ROLL	28 ft.	167.5 ft.
THICKNESS	2.5 mm	2.5 mm
WEIGHT PER ROLL	1.95 lbs.	11 lbs.
DIAMETER OF ROLL	6.75"	16"

01915-9793

Quality & Excellence Since 1938.

[www.ROBERTSCONSOLIDATED.com](http://www.ROBERTSCONSOLIDATED.com)

U.S. Headquarters  
866 435 8665

Canada  
800 840 9422

Europe/Middle East  
0031 24 6485348

Australia  
011 61 3 9797 1888

New Zealand  
64 9 415 9700