
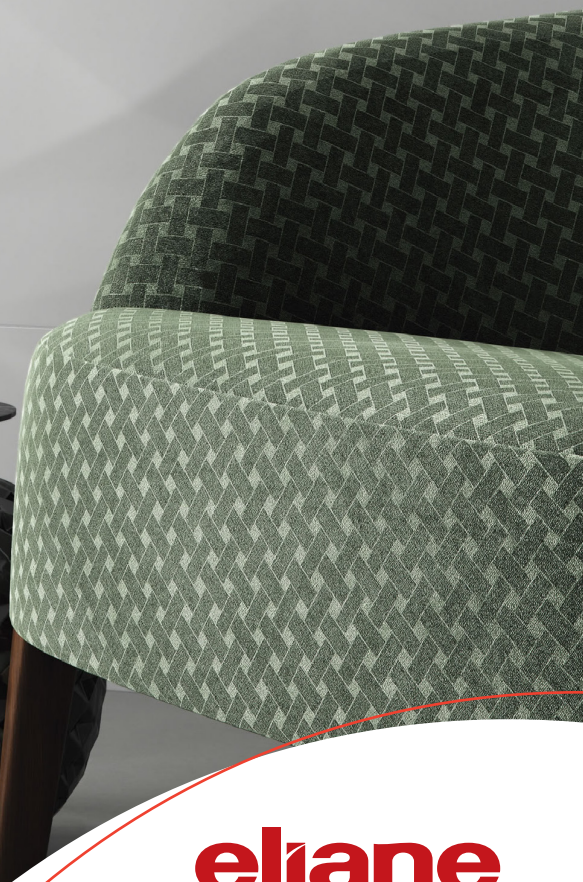


WALL CERAMIC TILES

DIAMANTE

12x36

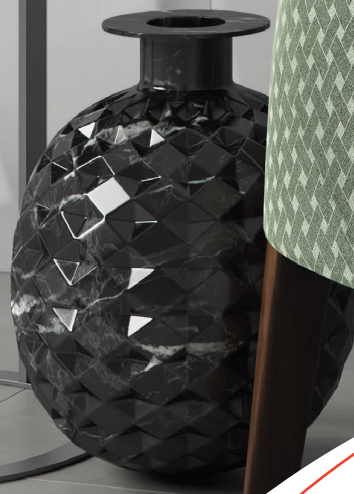


eliane

DIAMANTE
WALL CERAMIC TILES

Finishes
AC (Satin)
MA (Matte)

Mar AC

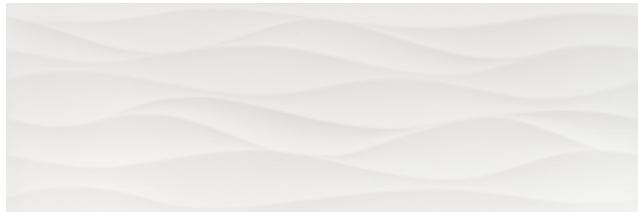

30 x 90 cm | 12"x36"

Cristallo AC




30 x 90 cm | 12"x36"

Cubic White AC



30 x 90 cm | 12"x36"

Diamante Branco AC

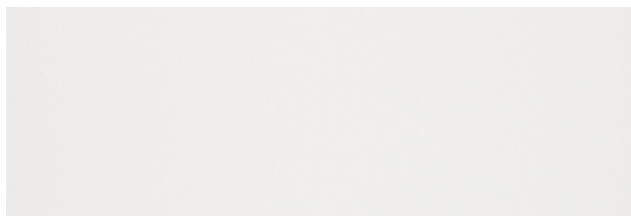

30 x 90 cm | 12"x36"

Origami AC




30 x 90 cm | 12"x36"

Ibirapuera Camel MA



30 x 90 cm | 12"x36"

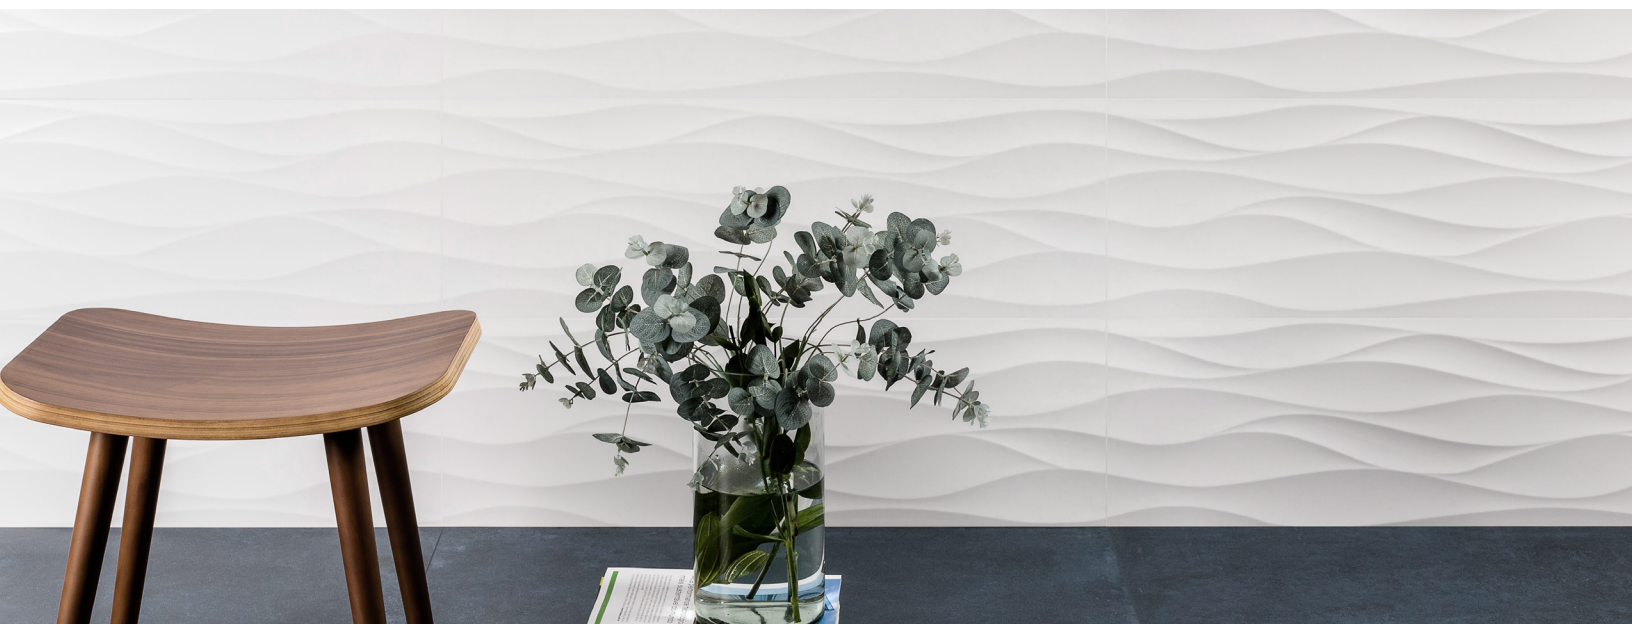

WALLS



FIRE PROOF



VOC FREE

eliane



DIAMANTE

WALL CERAMIC TILES

SIZES

	Product	Finish	Rect.	Work Size	Thick	Faces	Sq. Ft./ Carton	Pieces/ Carton
	Mar AC *							
	Cubic White AC *	Satin	Yes	300 x 900 mm 12" x 35-1/2"	12 mm	1	17.44	6
	Origami AC *							
	Cristalo AC *							
	Ibirapuera MA *	Matte	Yes	300 x 900 mm 12" x 35-1/2"	12 mm	8	17.44	6
	Diamante AC	Satin	Yes	300 x 900 mm 12" x 35-1/2"	10.5 mm	1	17.44	6

* High relief / 3D tiles

USAGE RECOMMENDATION

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Exterior Walls Applications	N/A	
Interior Walls/Backsplashes	N/A	✓
Interior Countertops	N/A	
Facades	N/A	
Pool Linings	N/A	



INSTALLATION AND CARE

Grout Joint Recommendation 1/16"

Shade Variation V1 - UNIFORM (Mar, Cubic, Origami, Cristalo, Diamante)

V2 - MODERATE VARIATION (Ibirapuera)

Professional tile installation is recommended. For complete installation instructions consult the TCNA Handbook for Ceramic, Glass, and Stone Tile Installation. Follow the grout manufacturer instructions for the complete removal of grout and construction residue from initial installation.

Eliane's recommendation for flooring care: sweep or vacuum the surface. Then mop the floor using a mop with water and a neutral cleaner (soap less) or a general household cleaner. Follow it with a clean water rinsed mop and wipe dry the floor to prevent film formation. For wall tiles care, Eliane recommends using a cloth with water and a neutral cleaner (soap less) or a general household cleaner.

QUALITY WARRANTY



Standard quality tiles manufactured by Eliane Ceramic Tiles meet or exceed ISO 13006, NBR 15463 and NBR 13818, ANSI A137.1 standards.



Eliane ceramic and porcelain tiles are NOT flammable, except mesh material of mesh mounted mosaics.



Eliane ceramic and porcelain tiles are low-emitting materials with zero emission of volatile organic compounds (VOC).

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	≤ 20%
Breaking Strength	C648	≥ 125 lbs
DCOF WET	ANSI A137.1 ANSI A326.3	N/A
Surface Abrasion (PEI)	C1027	N/A
Frost Resistance	C1026	No
Scratch Hardness	MOHS	4
Stain Resistance	C1378	A
Chemical Resistance	C650	A - E







eliane

BOLICK DISTRIBUTORS

2055 N. Airway Dr. Baton
Rouge, LA 70815

225-927-8016

www.bolickdistributors.com

